

Bilge Pumps & Float Switches



Fresh Water Pumps & Washdown Pump Kits



Toilets & Macerator Pumps



Other Equipment



SEAFLO®

FUJIAN AIDI ELECTRIC CO.,LTD.

Office Add: No.520 Hengtian Road, Business Operation Center in North Station, Jimei District, Xiamen, Fujian, China

Factory Add: F2-4 Block, Industrial Park, Liancheng County, Longyan City, Fujian, China

Tel / WhatsApp / Wechat: + 86 13860382108

Web: www.seaflomariner.com www.seaflo.com

E-mail: business@seaflo.com



Wechat



website



WhatsApp

ACCURACY AND COMPLETENESS OF INFORMATION

All information in this literature regarding products and services provided by SEAFLO is subject to change without prior notice. Reasonable efforts are taken to ensure the accuracy and integrity of all information provided here, but SEAFLO is not responsible for misprints, out-of-date information, or errors. SEAFLO makes no warranty, express or implied, or assumes any legal liability or responsibility for the accuracy or completeness of any information contained in this literature.

SEAFLO®

Make Water Work For You



MARINE & RV EQUIPMENT

www.seaflomariner.com



SA CE UK CA PAHS REACH ISO8846 ISO8849

FUJIAN AIDI ELECTRIC CO.,LTD.



LIANCHENG FACTORY

2008

Brand Created in

4 Million Annual Capacity

160,000
Square meters

1000+
Customers

180+
Patents



Reach and Design

SEAFLO group is an ISO9001 certified, professional marine & RV water system and outdoor solution manufacturer. We have 2 production bases, 2 modern standard workshops of 50000 square meters, more than 200 employees. SEAFLO products and brand is deeply engaged in Marine, RV and outdoor market for more than a decade. We offer professional and reliable service with the cost-effective products of SEAFLO brand and private branding for our partners.

We serve more than 1000 customers in over 100 countries all over the world. We are committed to build a strong and senior technical personnel of research & development team.

We have obtained more than 180 domestic and international patents, and our products have passed CE, RoHs, UKCA, ISO8846 and ISO8849, CSA, Reach, PAHs and other international certifications.

SEAFLO Mission: Bring value not only to our customers, but to the world.

SEAFLO Vision: Lead the vanguard of the next generation of great companies.

SEAFLO Value: Learning, Growing, Thankful, Together.



Automatic Screwing Equipment



Production Line



Automatic Injection Equipment



10,000 m² Warehouse



Factory



Xiamen R&D Center



Sales Center

Contents



07-24

Bilge Pumps

- Bilge Pumps
- Shower Sump Pump Systems
- Pool Cover Pump
- Dry Bilge System



25-28

Self-priming Bilge & Ballast Pumps

- Self-priming Bilge Pumps
- Ballast Pump 01 / 02 Series



29-30

Hand Pumps

- Piston Hand Pumps
- Diaphragm Hand Pumps



31-40

Livewell Pumps

- Livewell / Baitwell Pumps Series
- Portable Livewell Aerator Kit



41-47

Water Alarm Systems / Float Switches

- Electric Field Bilge Switch
- Water alarm systems
- 2 / 3-Way Switch Panels
- 01 / 02 / 03 / 04 / 05 Float Switch Series



48-50

Submersible / Line Pumps

- Low Voltage Submersible Pumps
- Submersible and Line Pumps



51-68

Fresh Water Pumps

- 23 / 21 / 22 Series Fresh Water Pumps
- 33 / 43 Series Fresh Water Pumps
- 41 / 42 Series Fresh Water Pumps
- 51 / 52 / 53 / 55 Series Fresh Water Pumps
- 56A / 56C Series Variable Speed Smart Pumps



69-75

Washdown Pump Kits

- 42 / 51 Series Washdown Pump Kit without Hose
- 42 / 51 Series Washdown Pump Kit with 6.5m Hose
- 33 / 51 Series Washdown Pump Kit with 6.5m Hose
- 41 Series portable Washdown Pump Kit
- 56 Series Portable Cleaning Kit



76-80

Accumulator Tank Water Pressure Systems

- Accumulator Tanks
- 33 / 42 / 51 Water Pressure Systems
- Pump Accumulator Pressure Boost Systems



81-82

Air Conditioning Pumps

- Air Conditioning Pumps 250 GPH
- Air Conditioning Pumps 500 GPH



83-86

Blowers

- 01 / 02 / 03 / 04 Series In-Line Blowers
- 01 / 02 / 03 Series Bilge Blowers



87-92

Battery Switches

- 2-3-4 Position Battery Switches
- Stab Jack Switch



93-109

Toilets

- Portable Toilets
- RV Toilets
- Quiet Flush Electric Toilets
- Electric Marine Toilets
- Electric Conversion Marine Toilets
- Manually Operated Marine Toilets
- Solenoid Valve & Siphon Breaker
- Rinse Pump / Switch Panel



110-114

Macerator Pumps / Waste Pump

- Macerator Pump 01 / 02 / 03 series
- Portable Macerator Pump Kit
- Diaphragm Waste Pump



115-124

Plastic Accessories

- External Showers, Head And Hose Kit
- Pvc Waste Valves
- Fold-Up Adjustable Drink Holders
- Round Louver Air Vents
- Plumbing Vents / Vent Covers
- Water Inlets & Hatches
- Dent Vents / Cable Hatches
- RV Handles



125-126

Faucet Series



127-128

Plastic Accessories

- Rv Sewer Hose Kits, Caps and Swivel Fittings
- Rv Hose Support
- Leveling Blocks & Tongue Jack Stands



129-131

Hatches / Portholes



132-138

Oil Change Systems

- Oil Change Systems
- Fuel Cans 5L, 10L, 12L, 20L, 24L
- Battery Powered Fuel Transfer Pumps
- Gear Pumps



139-140

Waterproof Storage Cans



141-143

Powered Stabilizing Jacks & Accessories



144-150

Other Accessories


- Raw Water Strainers
- Bilge Pump Hose Kits & Hose Clamps
- Pontoon Storage Blocks
- Boat Drain Plugs
- Fittings / Pressure Switches
- Wire Harness

CERTIFICATIONS

SEAFLO factory pays high value to ISO system including ISO 9001:2015, ISO 14001:2015 and ISO 18001:2007 for general management and production. SEAFLO not only has obtained 7 Invention Patents, 40 Utility Model Patents, 125 Design Patents till now, but also received many international authentications including CE, RoHS, REACH, CSA, ISO 8846 ISO 8849, PAHS etc.



CSA

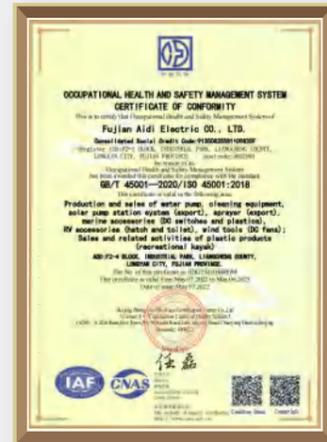

ISO 45001:2018



ISO 14001:2015



CE



UKCA



ISO 8846 ISO 8849



ISO 9001:2015




PAHS



RoHS




Reach

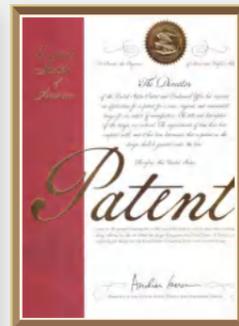

United States Patent

FRESH WATER PUMPS

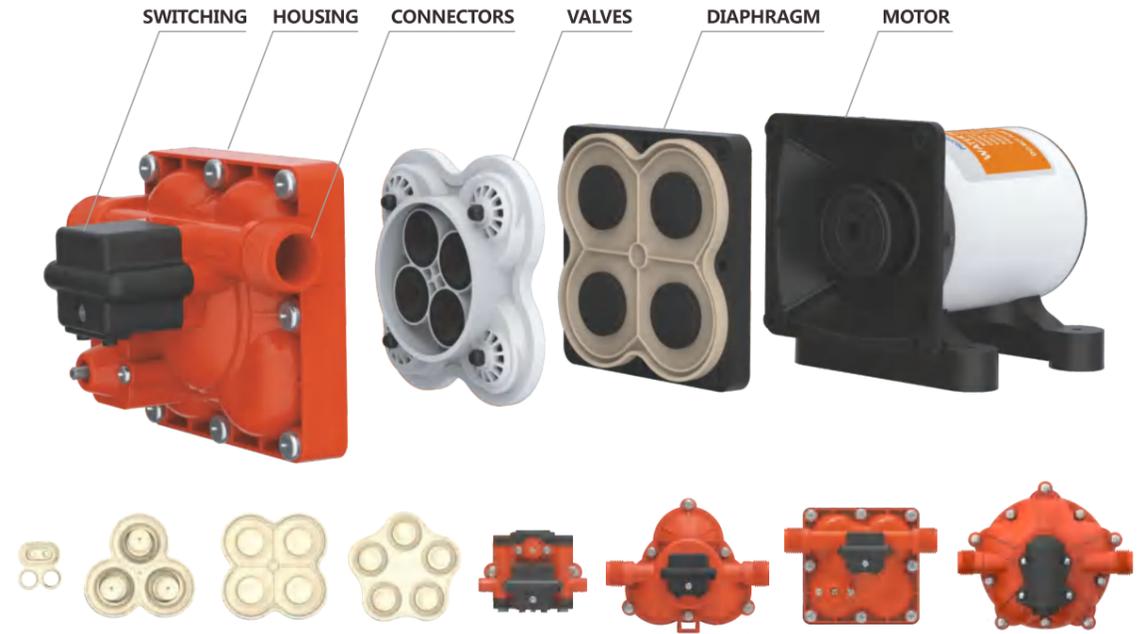

SWITCHING

- Bypass
- Demand
- Dual Controls
- No Controls
- Smart Controllers

HOUSING

- Nylon
- Polypro

VALVES

- Santoprene
- Viton
- Geolast
- Nylon
- Polypro
- BUNA
- EPDM

CONNECTORS

- Quick Attach
- FNPT
- MNPT

DIAPHRAGMS

- Santoprene
- Viton
- Geolast
- Various CAM Sizes
- BUNA

MOTORS

- Sealed
- 12,24 Volts
- 115,230 Volts
- Higher Output
- Heat Sinks
- Lead Sinks
- Lead Wires
- 2 Pin Connector
- On/Off Switch
- Special Electrical Connectors Available

BILGE PUMPS



Additional Options: Barcoding, CE certified, Various packaging options, Custom label/logo



NEW



Blister



Color Box




Blister



Color Box

NEW

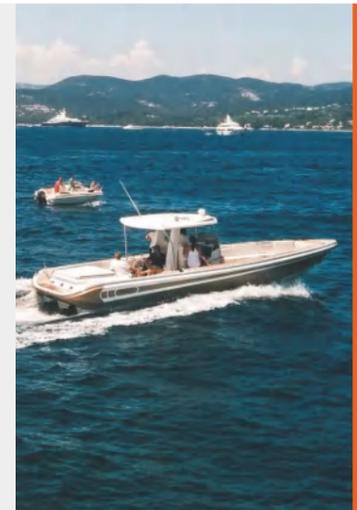

Non-Automatic Bilge Pumps 13A Series 600/800/1100 GPH

FEATURES & BENEFITS

- CE, RoHS, ISO 8846, ISO8849 standards
- Includes check valve to prevent water back flow
- Include removable discharge straight fitting
- Submersible and ignition protected
- High efficiency, low amp motor
- Stainless-steel motor shaft
- Anti-Airlock protection

Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.






Optional Accessories
1-1/8" (29mm)



Rotation Function

Motor can be sold separately

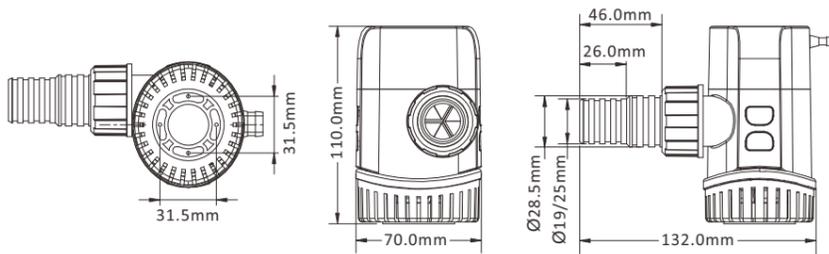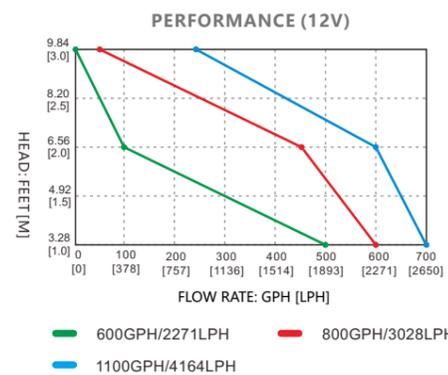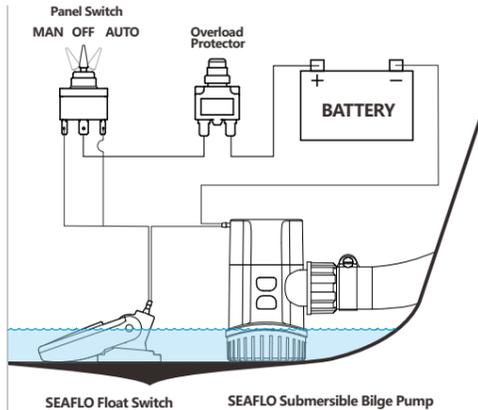

Standard Pump Configurations

Pump Model	Motor Model	Flowrate	Volts	Current	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-13A	SFMA1-G600-13A	600GPH	12V	2.5A	2.5m/7.5ft	3' (1 m)		0.40KG/0.47KG
SFBP2-G600-13A	SFMA2-G600-13A	600GPH	24V	1.5A	2.5m/7.5ft	3' (1 m)	3/4" (19mm)	0.40KG/0.47KG
SFBP1-G800-13A	SFMA1-G800-13A	800GPH	12V	3.5A	3m/9ft	3' (1 m)	1 1/8" (29mm)	0.40KG/0.47KG
SFBP2-G800-13A	SFMA2-G800-13A	800GPH	24V	2.0A	3m/9ft	3' (1 m)		0.40KG/0.47KG
SFBP1-G1100-13A	SFMA1-G1100-13A	1100GPH	12V	4.0A	4m/12ft	3' (1 m)	1" (25mm)	0.40KG/0.47KG
SFBP2-G1100-13A	SFMA2-G1100-13A	1100GPH	24V	2.5A	4m/12ft	3' (1 m)	1 1/8" (29mm)	0.40KG/0.47KG

Electronic Timer Sensing Auto Bilge Pumps 13B Series 600/800/1100 GPH

FEATURES & BENEFITS

- Compact automatic pump-no float switch needed
- Check for water every 2.5 minutes, Runs for a half second
- CE, RoHS, ISO 8846, ISO8849 standards
- Submersible and ignition protected
- High efficiency, low amp motor
- Stainless-steel motor shaft
- Includes check valve to prevent water back flow
- Include removable discharge straight fitting

Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.






Optional Accessories
1-1/8" (29mm)



Rotation Function

Motor can be sold separately

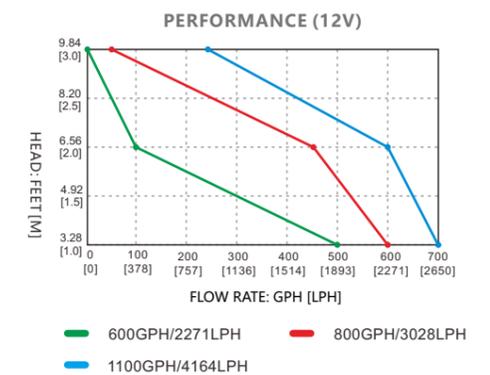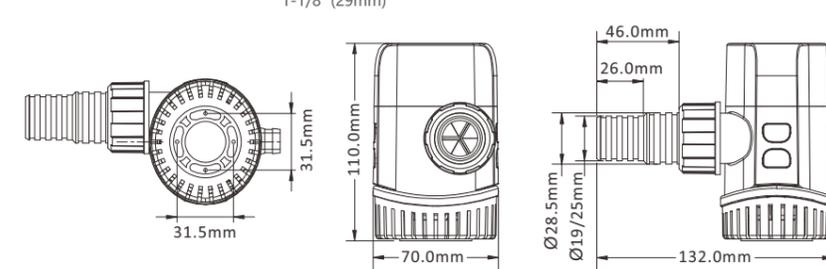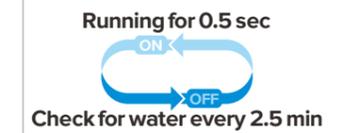

Standard Pump Configurations

Pump Model	Motor Model	Flowrate	Volts	Current	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-13B	SFMA1-G600-13B	600GPH	12V	2.5A	2.5m/7.5ft	3' (1 m)		0.40KG/0.47KG
SFBP2-G600-13B	SFMA2-G600-13B	600GPH	24V	1.5A	2.5m/7.5ft	3' (1 m)	3/4" (19mm)	0.40KG/0.47KG
SFBP1-G800-13B	SFMA1-G800-13B	800GPH	12V	3.5A	3m/9ft	3' (1 m)	1 1/8" (29mm)	0.40KG/0.47KG
SFBP2-G800-13B	SFMA2-G800-13B	800GPH	24V	2.0A	3m/9ft	3' (1 m)		0.40KG/0.47KG
SFBP1-G1100-13B	SFMA1-G1100-13B	1100GPH	12V	4.0A	4m/12ft	3' (1 m)	1" (25mm)	0.40KG/0.47KG
SFBP2-G1100-13B	SFMA2-G1100-13B	1100GPH	24V	2.5A	4m/12ft	3' (1 m)	1 1/8" (29mm)	0.40KG/0.47KG



NEW

Standard Straight Fitting
1 1/8" (29mm)

Check Valve

Blister

Color Box

NEW

Standard Straight Fitting
1 1/8" (29mm)

Check Valve






Non-automatic Bilge Pumps 13A Series 1500/2000 GPH

FEATURES & BENEFITS

- CE, RoHS, ISO 8846, ISO8849 standards
- Includes check valve to prevent water back flow
- Include removable discharge straight fitting
- Submersible and ignition protected
- High efficiency, low amp motor
- Stainless-steel motor shaft
- Anti-Airlock protection

Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.

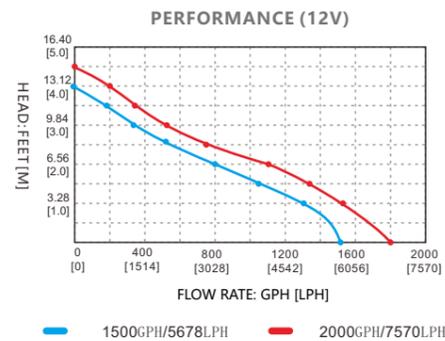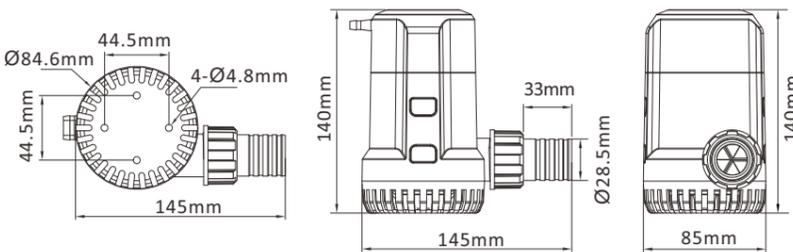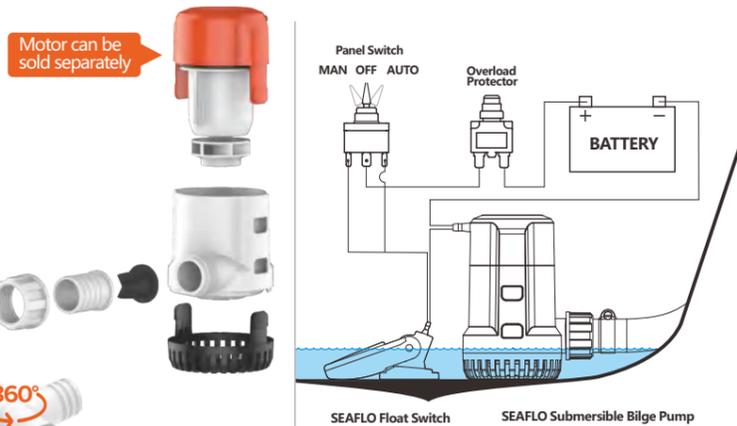

Standard Pump Configurations




Pump Model	Motor Model	Flow rate	Volts	Current	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFBP1-G1500-13A	SFMA1-G1500-13A	1500GPH	12V	4.5A	5m/16.40ft	3' (1 m)	1 1/8" (29mm)	0.65KG/0.75KG
SFBP2-G1500-13A	SFMA2-G1500-13A	1500GPH	24V	2.5A	5m/16.40ft	3' (1 m)		0.65KG/0.75KG
SFBP1-G2000-13A	SFMA1-G2000-13A	2000GPH	12V	7.5A	5.5m/18.04ft	3' (1 m)	1 1/8" (29mm)	0.75KG/0.85KG
SFBP2-G2000-13A	SFMA2-G2000-13A	2000GPH	24V	4.0A	5.5m/18.04ft	3' (1 m)		0.75KG/0.85KG

Electronic Timer Sensing Auto Bilge Pumps 13B Series 1500/2000 GPH

FEATURES & BENEFITS

- Compact automatic pump-no float switch needed
- Check for water every 2.5 minutes, Runs for a half second
- CE, RoHS, ISO 8846, ISO8849 standards
- Submersible and ignition protected
- High efficiency, low amp motor
- Stainless-steel motor shaft
- Includes check valve to prevent water back flow
- Include removable discharge straight fitting

Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.

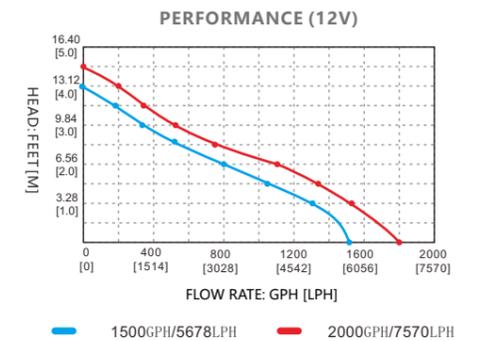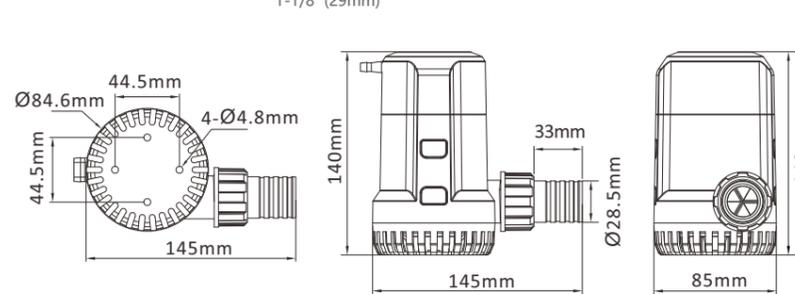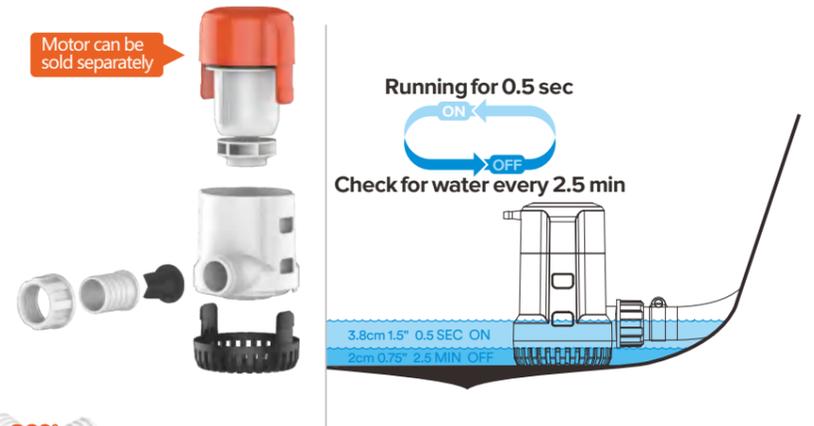

Standard Pump Configurations



Pump Model	Motor Model	Flow rate	Volts	Current	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFBP1-G1500-13B	SFMA1-G1500-13B	1500GPH	12V	4.5A	5.0m/16.40ft	3' (1 m)	1 1/8" (29mm)	0.68KG/0.78KG
SFBP2-G1500-13B	SFMA2-G1500-13B	1500GPH	24V	2.5A	5.0m/16.40ft	3' (1 m)		0.68KG/0.78KG
SFBP1-G2000-13B	SFMA1-G2000-13B	2000GPH	12V	7.5A	5.5m/18.04ft	3' (1 m)	1 1/8" (29mm)	0.78KG/0.88KG
SFBP2-G2000-13B	SFMA2-G2000-13B	2000GPH	24V	4.0A	5.5m/18.04ft	3' (1 m)		0.78KG/0.88KG



Non-automatic Bilge Pumps 13A Series 3000/3700/4700 GPH

FEATURES & BENEFITS

- CE, RoHS, ISO 8846, ISO 8849 standards
- Traditional operation by switch or float switch
- Entirely Submersible
- Run dry capable for workloads
- Quiet operation
- Stainless steel shaft
- Snap-off strainer base for easy maintenance
- Pump and switch are stand alone products
- Sealed efficient, long life motors
- Anti-Airlock protection
- Exclusive moisture tight seals
- Marine grade blocked wiring

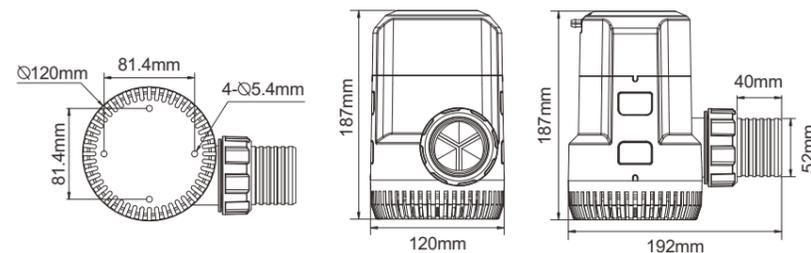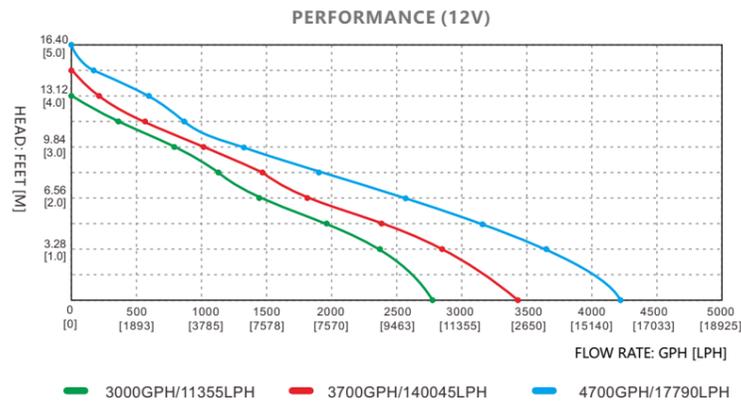

Standard Pump Configurations

Model	Flow rate	Volts	Current	Fuse	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G3000-13A	3000 GPH	12V	12A	20A	5.5m/18.04'	1 m/3'	1.5" (40mm) 2" (52mm)	2.1kg/2.2kg
SFBP2-G3000-13A	3000 GPH	24V	6A	10A	5.5m/18.04'	1 m/3'	1.5" (40mm) 2" (52mm)	2.1kg/2.2kg
SFBP1-G3700-13A	3700 GPH	12V	14A	25A	6.0m/19.69'	1 m/3'	1.5" (40mm) 2" (52mm)	2.1kg/2.2kg
SFBP2-G3700-13A	3700 GPH	24V	7A	12A	6.0m/19.69'	1 m/3'	1.5" (40mm) 2" (52mm)	2.1kg/2.2kg
SFBP1-G4700-13A	4700 GPH	12V	16A	25A	6.5m/21.33'	1 m/3'	1.5" (40mm) 2" (52mm)	2.1kg/2.2kg
SFBP2-G4700-13A	4700 GPH	24V	8A	14A	6.5m/21.33'	1 m/3'	1.5" (40mm) 2" (52mm)	2.1kg/2.2kg

Water Level Sensing Low Profile Automatic Bilge Pump 14A Series 800/1100 GPH




FEATURES & BENEFITS

- Low narrow design for tight/awkward bilge spaces
- Easy installation - outlet and pump body 360° rotate to suit your installation
- Efficient operation - Very low power consumption
- Low profile strainer - Leaves the bilge almost dry
- Easy to clean - snap fit assembly
- Easy to clean - unique clever strainer design with 360° rotation function
- Easy to clean - easy to remove and replace for cleaning
- Includes check valve to prevent water backflow
- CE, RoHS, ISO 8846, ISO 8849 standards

Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.



Water Level Sensing

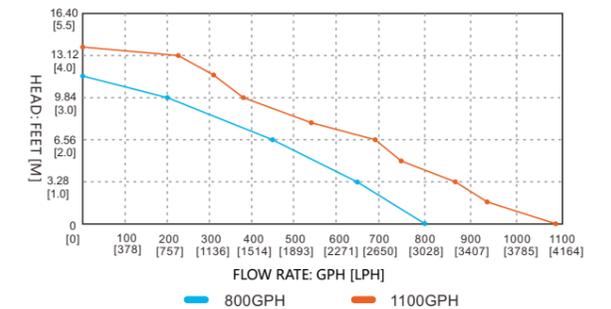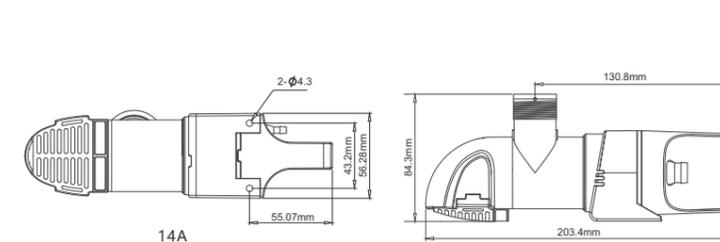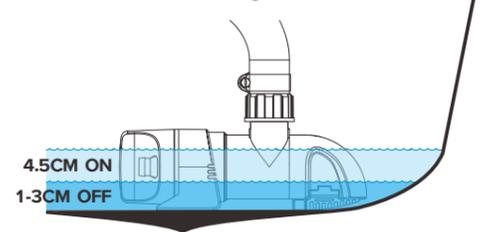

Standard Pump Configurations

Model	Model	Flow rate	Volts	Current	Head	Mode of Operation	Outlet Dia.	N.W./G.W.
SFBP1-G800-14A	SFMA1-G800-14A	800GPH	12V	3.2A	3.2m/10.5'	automatic water level sensor	3/4" (19mm)	0.39/0.56kg
SFBP2-G800-14A	SFMA2-G800-14A	800GPH	24V	2.0A	3.2m/10.5'		1" (25mm)	0.39/0.56kg
SFBP1-G1100-14A	SFMA1-G1100-14A	1100GPH	12V	4.2A	4.0m/13'		1 1/8" (29mm)	0.39/0.56kg
SFBP2-G1100-14A	SFMA2-G1100-14A	1100GPH	24V	3.0A	4.0m/13'			0.39/0.56kg

NEW




NEW




Timer Sensing Low Profile Automatic Bilge Pump 14B Series 800/1100 GPH

FEATURES & BENEFITS

- Low narrow design for tight/awkward bilge spaces
- Easy installation - outlet and pump body 360° rotate to suit your installation
- Efficient operation - Very low power consumption
- Low profile strainer - Leaves the bilge almost dry
- Easy to clean- snap fit assembly
- Easy to clean – unique clever strainer design with 360° rotation function
- Easy to clean – easy to remove and replace for cleaning
- Includes check valve to prevent water backflow
- CE, RoHS, ISO 8846, ISO8849 standards


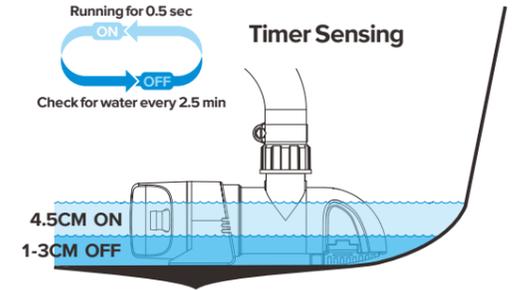


Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.



Motor can be sold separately

Take out motor and fasten with screw before install the pump

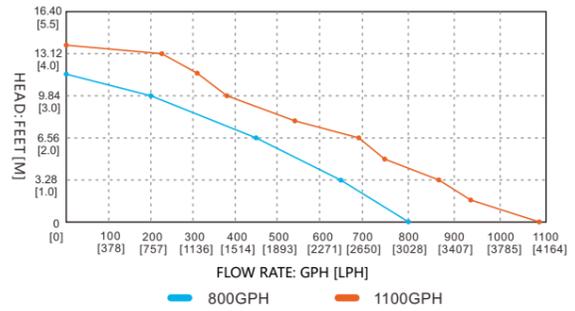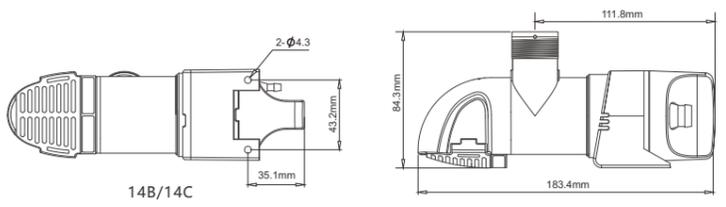


Standard Pump Configurations

Model	Model	Flow rate	Volts	Current	Head	Mode of Operation	Outlet Dia.	N.W./G.W.
SFBP1-G800-14B	SFMA1-G800-14B	800GPH	12V	3.2A	3.2m/10.5'	automatic timer sensor	3/4" (19mm) 1" (25mm) 1 1/8" (29mm)	0.38/0.55kg
SFBP2-G800-14B	SFMA2-G800-14B	800GPH	24V	2.0A	3.2m/10.5'			0.38/0.55kg
SFBP1-G1100-14B	SFMA1-G1100-14B	1100GPH	12V	4.2A	4.0m/13'			0.38/0.55kg
SFBP2-G1100-14B	SFMA2-G1100-14B	1100GPH	24V	3.0A	4.0m/13'			0.38/0.55kg

Low Profile Bilge Pump 14C Series 800/1100 GPH

FEATURES & BENEFITS

- Low narrow design for tight/awkward bilge spaces
- Easy installation - outlet and pump body 360° rotate to suit your installation
- Efficient operation - Very low power consumption
- Low profile strainer - Leaves the bilge almost dry
- Easy to clean- snap fit assembly
- Easy to clean – unique clever strainer design with 360° rotation function
- Easy to clean – easy to remove and replace for cleaning
- Includes check valve to prevent water backflow
- CE, RoHS, ISO 8846, ISO8849 standards


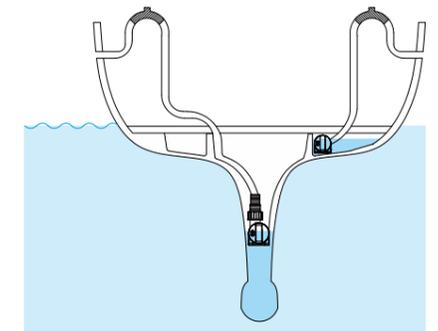


Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.



Motor can be sold separately

Take out motor and fasten with screw before install the pump

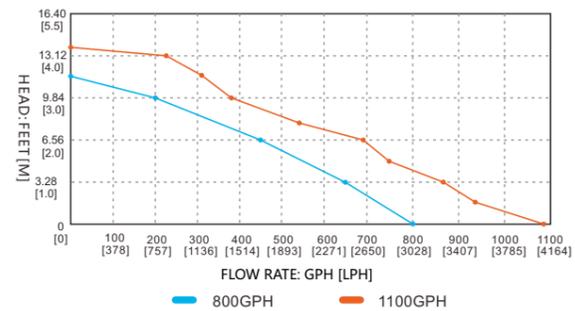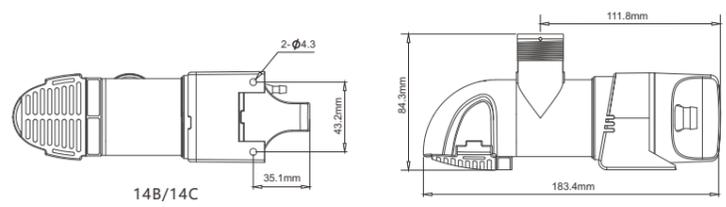

Standard Pump Configurations

Model	Model	Flow rate	Volts	Current	Head	Mode of Operation	Outlet Dia.	N.W./G.W.
SFBP1-G800-14C	SFMA1-G800-14C	800GPH	12V	3.2A	3.2m/10.5'	manual	3/4" (19mm) 1" (25mm) 1 1/8" (29mm)	0.35/0.51kg
SFBP2-G800-14C	SFMA2-G800-14C	800GPH	24V	2.0A	3.2m/10.5'			0.35/0.51kg
SFBP1-G1100-14C	SFMA1-G1100-14C	1100GPH	12V	4.2A	4.0m/13'			0.35/0.51kg
SFBP2-G1100-14C	SFMA2-G1100-14C	1100GPH	24V	3.0A	4.0m/13'			0.35/0.51kg



Blister



Color Box



Blister



Color Box



Non-automatic Bilge Pumps 01 Series 350/500/750/1100 GPH

FEATURES & BENEFITS

- CE, RoHS, ISO 8846, ISO 8849 standards
- Traditional operation by switch or float switch
- Entirely Submersible
- Run dry capable for workloads
- Quiet operation
- Stainless steel shaft

- Snap-off strainer base for easy maintenance
- Pump and switch are stand alone products
- Sealed efficient, long life motors
- Anti-Airlock protection
- Exclusive moisture tight seals
- Marine grade blocked wiring

**BILGE PUMP & FLOAT SWITCH
SFBP1-G1100-15**



1100GPH, 12V Max.20A


Blister

**BILGE PUMP & FLOAT SWITCH
SFBP1-G1100-16**



1100GPH, 12V Max.18A

Blister

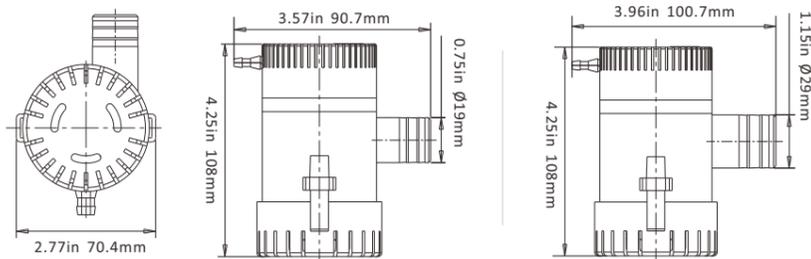

350 GPH-500 GPH-750 GPH

1100 GPH




Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-01	350 GPH	12 V	1.0 A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP1-G500-01	500 GPH	12 V	1.6 A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP2-G500-01	500 GPH	24 V	1.2 A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP1-G750-01	750 GPH	12 V	2.5 A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP2-G750-01	750 GPH	24 V	1.2 A	3 m / 10'	1 m / 3'	19 mm/3/4"	0.33/0.40 kg
SFBP1-G1100-01	1100 GPH	12 V	4.0 A	4 m / 13'	1 m / 3'	29 mm/1-1/8"	0.38/0.44 kg
SFBP2-G1100-01	1100 GPH	24 V	2.5 A	4 m / 13'	1 m / 3'	29 mm/1-1/8"	0.38/0.44 kg

Non-automatic Bilge Pumps 01 Series 1500/2000 GPH

FEATURES & BENEFITS

- CE, RoHS, ISO 8846, ISO 8849 standards
- Traditional operation by switch or float switch
- Entirely Submersible
- Run dry capable for workloads
- Quiet operation
- Stainless steel shaft
- Snap-off strainer base for easy maintenance
- Pump and switch are stand alone products
- Sealed efficient, long life motors
- Anti-Airlock protection
- Exclusive moisture tight seals
- Marine grade blocked wiring

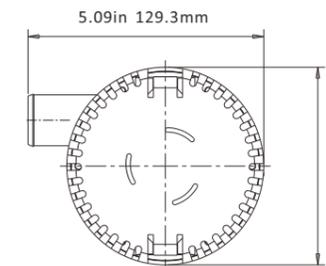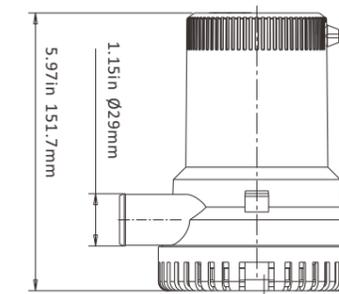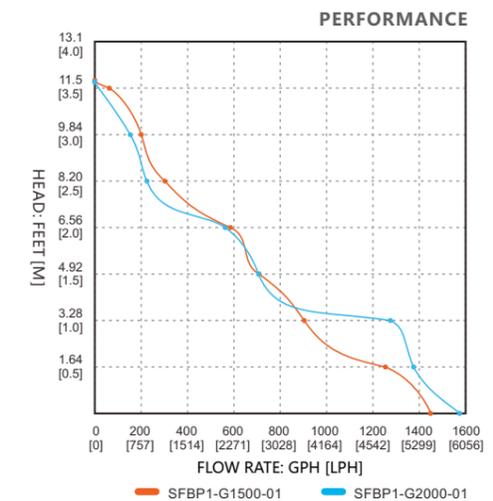

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G1500-01	1500 GPH	12 V	8.0 A	5 m / 16'	1 m / 3'	29 mm/1-1/8"	1.13/1.21 kg
SFBP2-G1500-01	1500 GPH	24 V	4.0 A	5 m / 16'	1 m / 3'	29 mm/1-1/8"	1.13/1.21 kg
SFBP1-G2000-01	2000 GPH	12 V	8.5 A	6 m / 19'	1 m / 3'	29 mm/1-1/8"	1.13/1.21 kg
SFBP2-G2000-01	2000 GPH	24 V	5.0 A	6 m / 19'	1 m / 3'	29 mm/1-1/8"	1.13/1.21 kg



Blister



Color Box



Blister



02 Series



08 Series




Non-automatic Bilge Pumps 01 Series 3000/3500/3700/4700 GPH


FEATURES & BENEFITS

- CE, RoHS, ISO 8846, ISO 8849 standards
- Traditional operation by switch or float switch
- Entirely Submersible
- Run dry capable for workloads
- Snap-off strainer base for easy maintenance
- Pump and switch are stand alone products


- Quiet operation
- Stainless steel shaft
- Sealed efficient, long life motors
- Anti-Airlock protection
- Exclusive moisture tight seals
- Marine grade blocked wiring

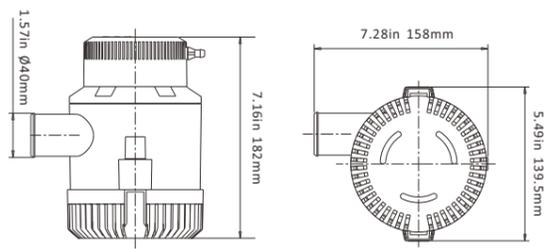

3000 GPH - 3500 GPH - 3700GPH

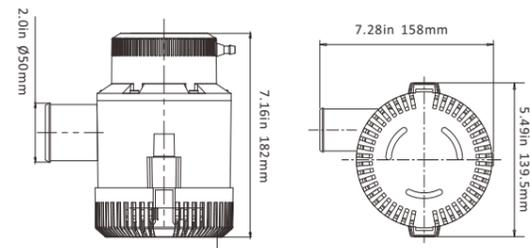

4700 GPH

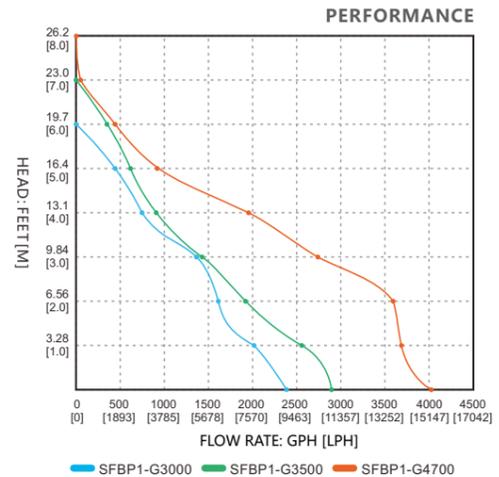


Non-automatic Bilge Pumps 02/08 Series 600 GPH

FEATURES & BENEFITS



- Pump and switch are stand alone products
- Compact, efficient, long life motors
- Size: 350, 600 gph in 12 volt version
- Easy clean snap-lock strainer bases
- Completely submersible
- Marine grade blocked wiring
- Quiet and vibrationless operation
- 18 AWG, 1 m long leads

MOTOR

- Type**
Compact, efficient, long life motor
- Temperature Limits**
110 °F (43 °C) Max.
- Duty Cycle**
Intermittent
- Voltage**
12 V / 24 V

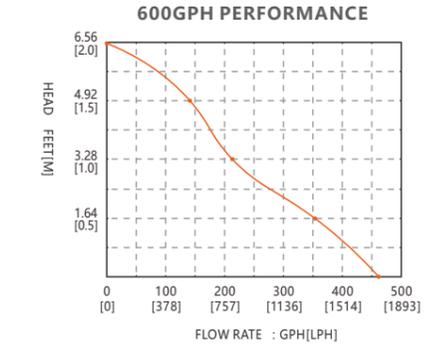

02 Series

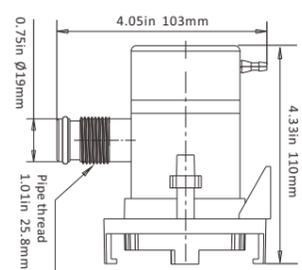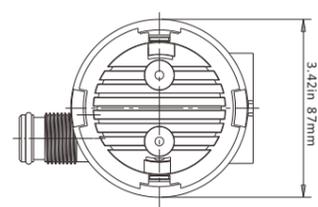

Standard Pump Configurations



Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-02	600 GPH	12V	2.5 A	2 m / 6.5'	1 m / 3'	19 mm / 3/4"	0.33 / 0.40 kg

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G3000-01	3000 GPH	12V	14.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP2-G3000-01	3000 GPH	24V	7.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP1-G3500-01	3500 GPH	12V	16.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP2-G3500-01	3500 GPH	24V	8.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP1-G3700-01	3700 GPH	12V	16.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP2-G3700-01	3700 GPH	24V	8.0A	8 m / 26'	1 m / 3'	40 mm / 1-1/2"	2.10 / 2.37 kg
SFBP1-G4700-01	4700 GPH	12V	17.0A	8 m / 26'	1 m / 3'	50 mm / 2"	2.10 / 2.37 kg
SFBP2-G4700-01	4700 GPH	24V	8.5A	8 m / 26'	1 m / 3'	50 mm / 2"	2.10 / 2.37 kg



08 Series

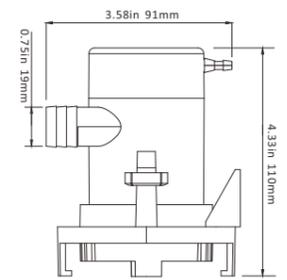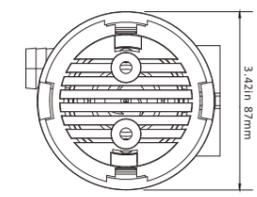

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-08	600 GPH	12V	2.5 A	2 m / 6.5'	1 m / 3'	19 mm / 3/4"	0.22 / 0.28 kg



Mechanical Auto Bilge Pumps 600/750/1100 GPH

FEATURES & BENEFITS





- All-in-one pump & switch-No float switch required
- Pump turns on when water level rises & shuts off when water is removed
- Will not pump oil-straight motor oil that enters the bilge will not turn the pump on
- Snap-off strainer for easy cleaning
- Anti-fouling impeller
- 18 AWG, 1 m long Leads

MOTOR

Type
Sealed, efficient, long life motor

Temperature Limits
110 °F (43 °C) Max.

Duty Cycle
Intermittent

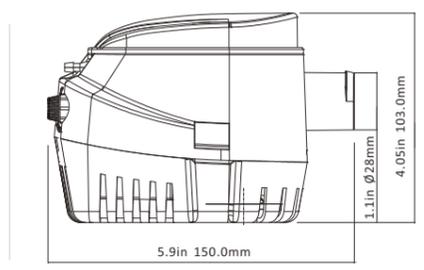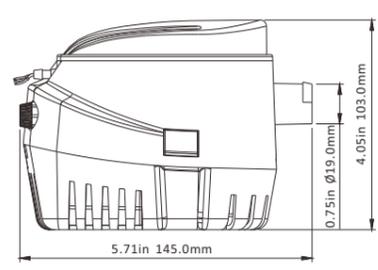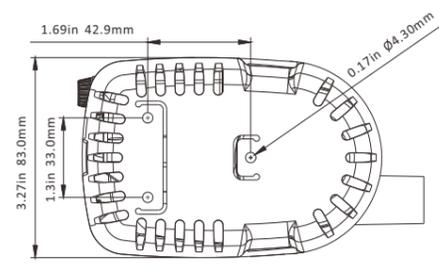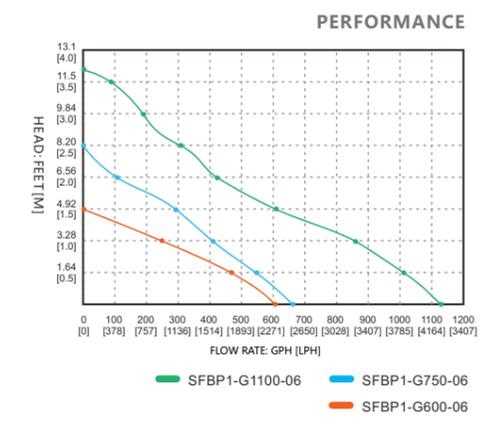

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-06	600 GPH	12 V	2.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	0.47/0.52 kg
SFBP2-G600-06	600 GPH	24 V	1.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	0.47/0.52 kg
SFBP1-G750-06	750 GPH	12 V	3.0 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	0.47/0.52 kg
SFBP2-G750-06	750 GPH	24 V	1.6 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	0.47/0.52 kg
SFBP1-G1100-06	1100 GPH	12 V	4.0 A	4.0 m / 13.0'	1 m / 3.0'	29 mm/1-1/8"	0.55/0.60 kg
SFBP2-G1100-06	1100 GPH	24 V	2.5 A	4.0 m / 13.0'	1 m / 3.0'	29 mm/1-1/8"	0.55/0.60 kg

Shower Sump Pump System 600/750 GPH




FEATURES & BENEFITS

- Removable mesh filter allows easy cleaning
- Clear screw-down cover
- Check valve on outlet
- Ignition protected
- Handles waste water from more than one tapping point
- Easy installation
- Multiple inlet ports for versatile usage
- 18 AWG, 1 m long Leads

MOTOR

Type
Sealed, efficient, long life motor

Duty Cycle
Intermittent

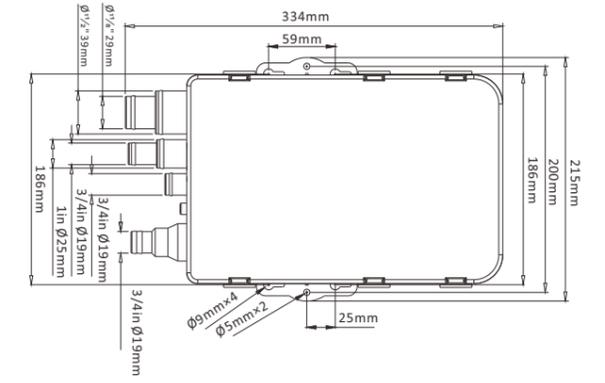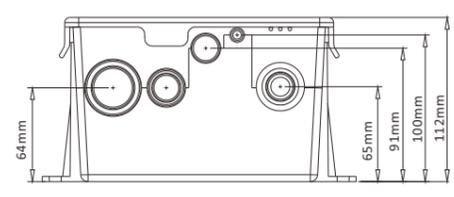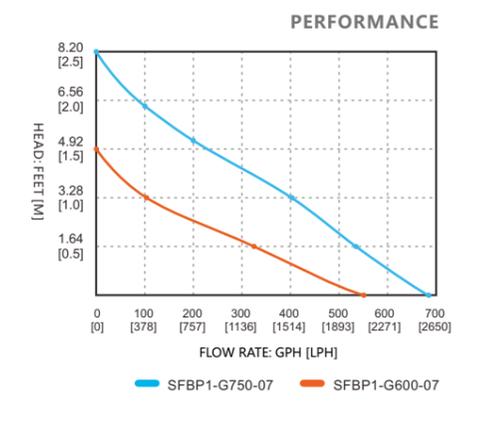

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-07	600 GPH	12 V	2.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.35 kg
SFBP2-G600-07	600 GPH	24 V	1.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.36 kg
SFBP1-G750-07	750 GPH	12 V	3.0 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.37 kg
SFBP2-G750-07	750 GPH	24 V	1.6 A	3.0 m / 10.0'	1 m / 3.0'	19 mm/3/4"	1.17/1.38 kg



Electromagnetic Auto Bilge Pumps 600/750/1100 GPH

FEATURES & BENEFITS

- All-in-one pump & Electromagnetic sensor switch
- Enclosed construction offers advanced reliability
- Allows for effortless installation and service
- With the ability to quick disconnect the power line and the strainer base in seconds
- Proper pump care has never been easier
- Available in 600, 750, and 1100 GPH
- 18 AWG, 1 m long leads


MOTOR

Type
Sealed, efficient, long life motor


Temperature Limits
110 °F (43 °C) Max.

Duty Cycle
Intermittent

PERFORMANCE

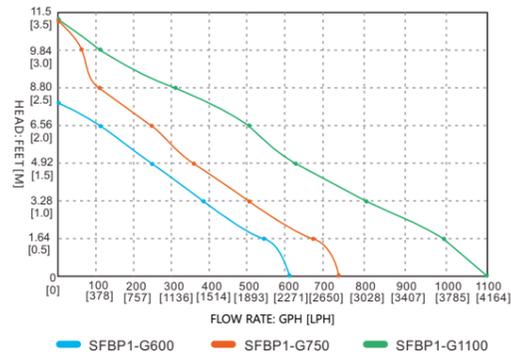

New innovative quick change feature removes and installs in seconds!
No need to disconnect base or plumbing when replacing pump

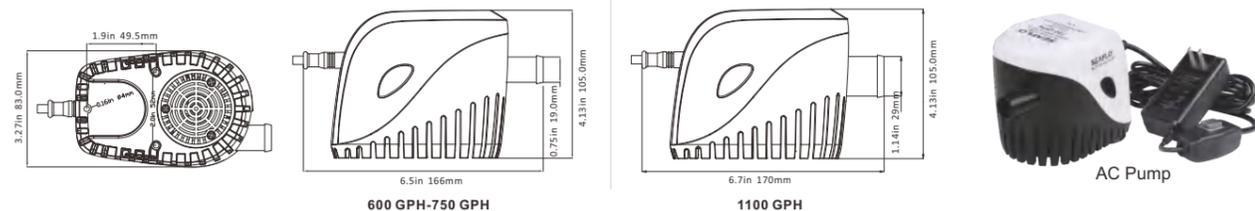

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-11	600 GPH	12 V	2.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm / 3/4"	0.55/0.6 kg
SFBP2-G600-11	600 GPH	24 V	1.5 A	2.5 m / 8.0'	1 m / 3.0'	19 mm / 3/4"	0.55/0.6 kg
SFBP1-G750-11	750 GPH	12 V	3.0 A	3.0 m / 10.0'	1 m / 3.0'	19 mm / 3/4"	0.55/0.6 kg
SFBP2-G750-11	750 GPH	24 V	1.6 A	3.0 m / 10.0'	1 m / 3.0'	19 mm / 3/4"	0.55/0.6 kg
SFBP1-G1100-11	1100 GPH	12 V	4.0 A	4.0 m / 13.0'	1 m / 3.0'	29 mm / 1-1/8"	0.55/0.6 kg
SFBP2-G1100-11	1100 GPH	24 V	2.5 A	4.0 m / 13.0'	1 m / 3.0'	29 mm / 1-1/8"	0.55/0.6 kg
SFBPA2-G1100-11	1100 GPH	220 V	12.5 A	4.0 m / 13.0'	1 m / 3.0'	29 mm / 1-1/8"	0.97/1.0 kg





Pool Cover Pump

FEATURES & BENEFITS

- Unique flying-object shape to easily reach the middle of the pool cover.
- IC chip to turn on and off, which is more sensitive and accurate.
- Innovative vent valve design to solve air trap.
- Removable strainer to minimize clogging and easily clean.
- Low center of gravity to protect from tilting during operation.
- Auto on activates when water at, or above 3.8cm (1.5") has been detected.
- Auto off activates when water at, or below 1cm (2/5") has been detected.



Rotation Function

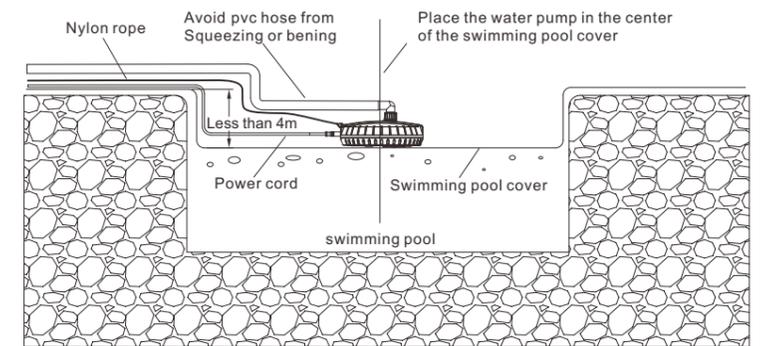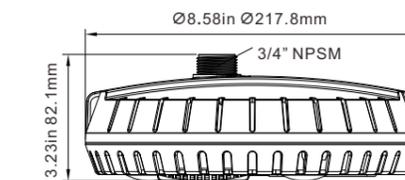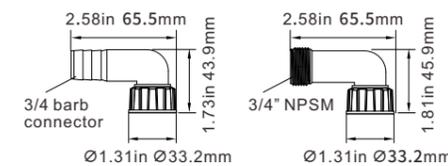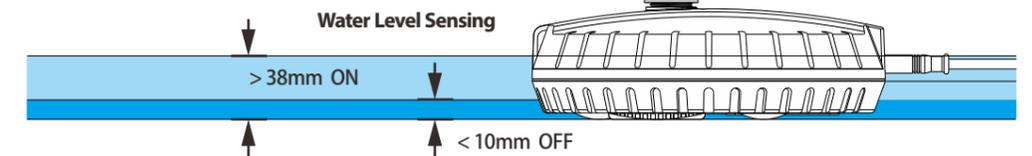

Swimming pool cover pump operating instructions

Standard Pump Configurations


Pump Model	Voltage	Max Flow Rate	Rate Power	Max Head	Outlet Dia.	Cable Length	Weight
SFPCP-G1000-01A	115/230 VAC (50/60 Hz)	63LPM/1000GPH	51W	4m	3/4" NPSM	7.6m (25ft)	3.5 lbs (1.6 kg)



Dry Bilge System

FEATURES & BENEFITS


- 25' Self-priming suction allows the system to be remotely mounted.
- User programmable timer allows the user to activate the system as much, or as little, as needed.
- Thin (5/16") suction hose allows for easy bends and fits into tight spaces.
- Quick-connect fittings allow for simple plumbing installation.
- High absorption suction base ensures a dry bilge.
- Automatic-Off-Manual toggle switch allows user to activate the system manually in addition to automatically.
- Ignition Protected- ISO 8846 Marine / SAE J1171 Marine.

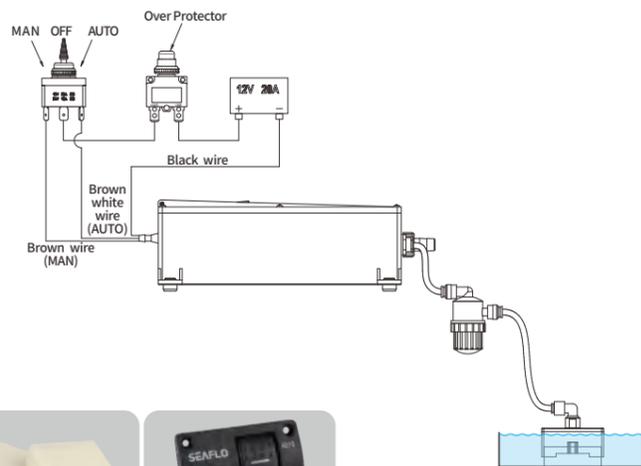

Included



INSTALLATION DIMENSION DRAWING

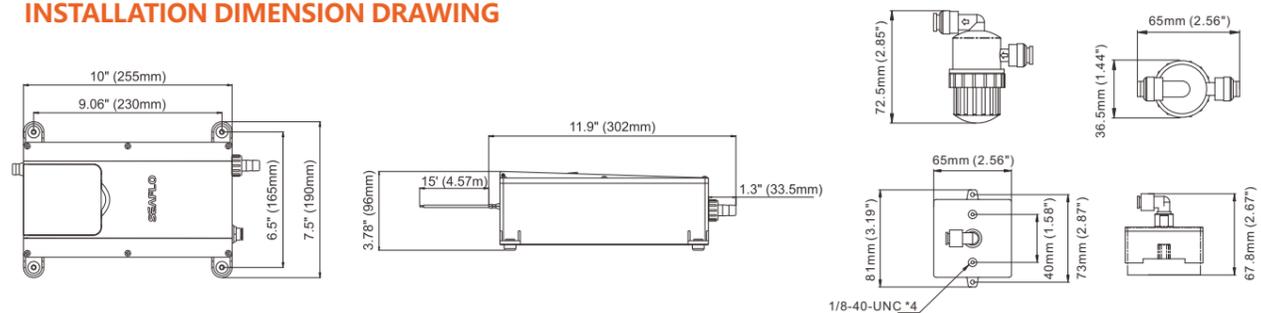

Model	Voltage	Max Draw	Open Flow	Inlet Dia	Outlet Dia
SFDBS1-01	12V	5.5 A	1 LPM/0.3GPM	1/4"	1/2" Barb
SFDBS2-01	24V	2.75 A	1 LPM/0.3GPM	1/4"	1/2" Barb



Four outlets solenoid valve



FEATURES & BENEFITS


- Use with the SEAFLOR Dry Bilge System to keep bilges clean and dry
- The valve has 4 inlet and 1 outlets
- All four water inlets can be controlled independently
- Water inlet port and outlet port diameter are 5/16"(8mm)
- High absorption suction base ensures a dry bilge
- Quick-connect fittings allow for simple plumbing installation

INSTALLATION DIMENSION DRAWING

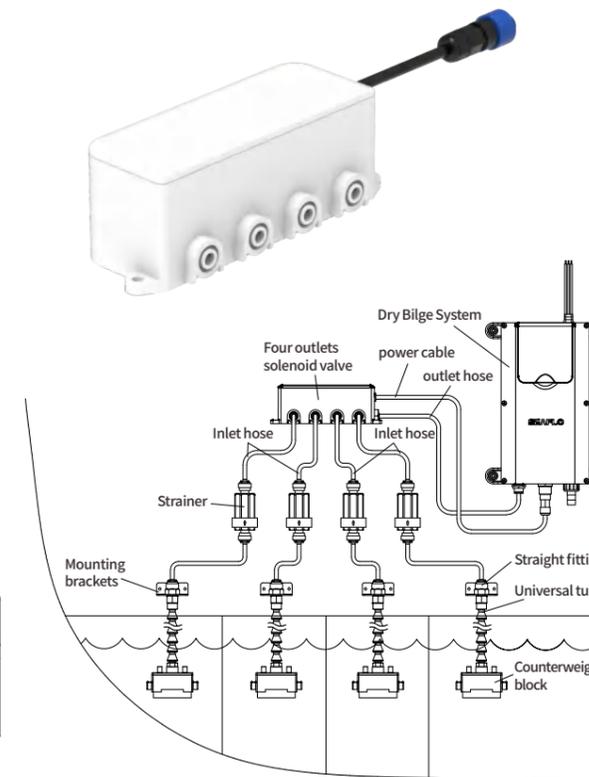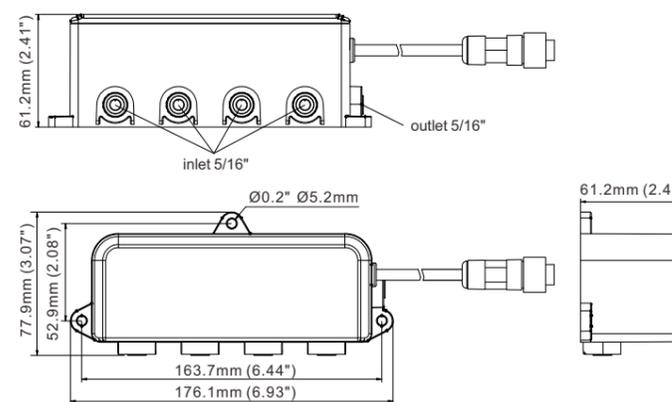

Model	Voltage	Current	Pressure
SFSV1-02	12V	0.8 A	1-150PSI
SFSV2-02	24V	0.4 A	1-150PSI

A Series

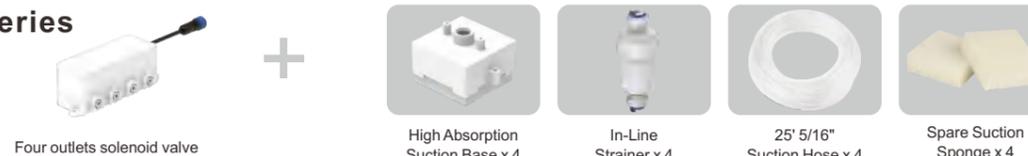

Model	Voltage	Current	Pressure
SFSV1-02A	12V	0.8 A	1-150PSI
SFSV2-02A	24V	0.4 A	1-150PSI

B Series



Model	Voltage	Current	Pressure
SFSV1-02B	12V	0.8 A	1-150PSI
SFSV2-02B	24V	0.4 A	1-150PSI



Color Box

Bronze Pump Head



Color Box

Plastic Pump Head



Self-priming Bilge Pumps

FEATURES & BENEFITS

- Sealed motor design
- Thermally Protected Motor
- High Quality Efficient Motor
- Self-priming
- Stainless Steel Shaft
- Great for bilge water that traditional pumps cannot get to

PUMP

- Liquid Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
4 feet (1.2 m) suction lift
- Power**
10 amps max current draw
- Max Pressure**
3 m (9.8 ft)

MOTOR

- Type**
High quality seamless design that is thermally protected
- Leads**
Wire leads
- Duty Cycle**
Intermittent
- Voltage**
12 V/24 V


Optional Accessories



Impeller (0.31") 8 mm

TYPICAL APPLICATIONS

- Bilge pump
- Industrial use
- Water transfer

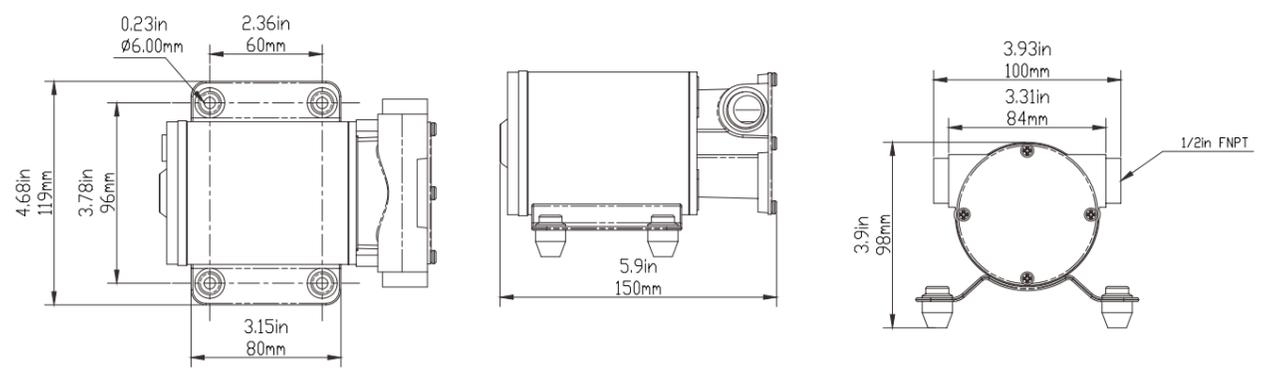

Self-priming Bilge Pumps

FEATURES & BENEFITS

- Sealed motor design
- Thermally Protected Motor
- High Quality Efficient Motor
- Self-priming
- Stainless Steel Shaft
- Great for bilge water that traditional pumps cannot get to

PUMP

- Liquid Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
4 feet (1.2 m) suction lift
- Power**
10 amps max current draw
- Max Pressure**
3 m (9.8 ft)

MOTOR

- Type**
High quality seamless design that is thermally protected
- Leads**
Wire leads
- Duty Cycle**
Intermittent
- Voltage**
12 V/24 V


Optional Accessories



Impeller (0.31") 8 mm

TYPICAL APPLICATIONS

- Bilge pump
- Industrial use
- Water transfer

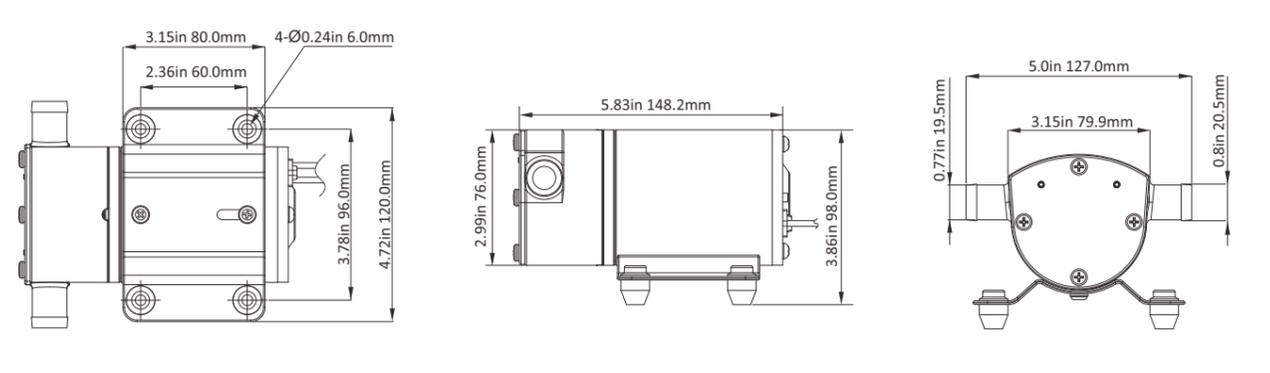

Standard Pump Configurations

Model	Voltage	GPM/LPM	Pump Head	Impeller	Ports	Lead	Molded	Max Draw(A)
SFSP1-080-003-01	12 V	8.0 / 30.0	Bronze	Rubber & copper	1/2" FNPT	Yes	N/A	10.0
SFSP2-080-003-01	24 V	8.0 / 30.0	Bronze	Rubber & copper	1/2" FNPT	Yes	N/A	7.0

Standard Pump Configurations

Model	Voltage	GPM/LPM	Pump Head	Impeller	Ports	Lead	Molded	Max Draw(A)
SFSP1-080-003-02	12 V	8.0 / 30.0	Plastic	Rubber & copper	3/4" hose barb	Yes	N/A	10.0
SFSP2-080-003-02	24 V	8.0 / 30.0	Plastic	Rubber & copper	3/4" hose barb	Yes	N/A	5.0



Color Box

NEW

Optional Accessories



Impeller
(0.87") 22mm



Color Box

NEW

Optional Accessories




Impeller
(1.73") 44mm



Ballast Pump 01 Series

FEATURES & BENEFITS



- Reversible pump both fills and empties ballast tanks
- 13.5 GPM / 50 LPM flow rate
- Self-priming to 6.5 ft. (2m)
- Use with Reversing Polarity Switch to fill or empty ballast tanks
- High performance and output of intermittent work cycles
- Improved impeller designed for run dry for short duration
- Built in thermal overload protection, automatically reset after cooling

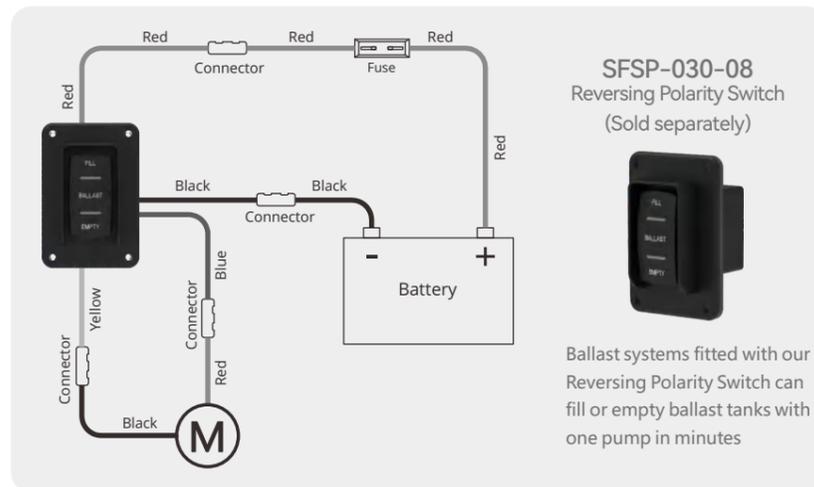

Ballast Pump 02 Series


FEATURES & BENEFITS

- Reversible pump both fills and empties ballast tanks
- 30 GPM / 113 LPM flow rate
- Self-priming to 6.5 ft. (2m)
- Use with Reversing Polarity Switch to fill or empty ballast tanks
- High performance and output of intermittent work cycles
- Improved impeller designed for run dry for short duration
- Built in thermal overload protection, automatically reset after cooling

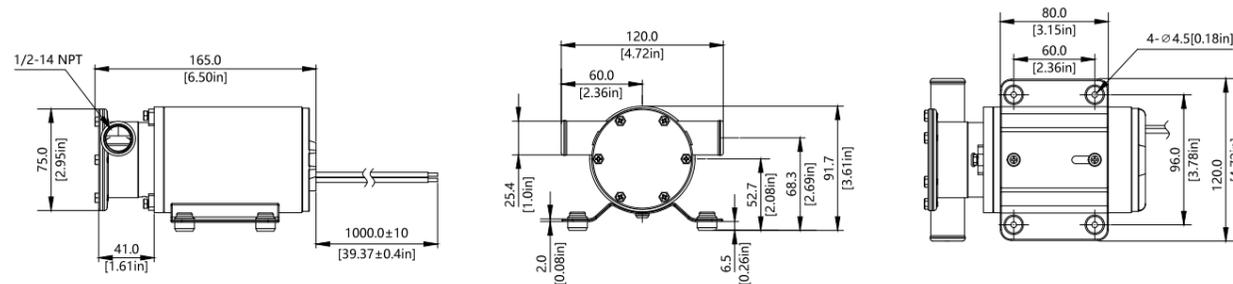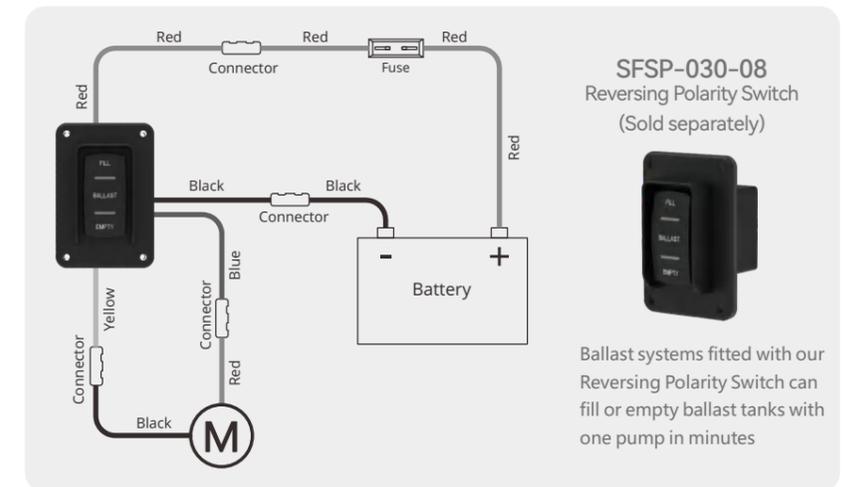

Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Head	Amp (A)	Ports
SFSP1-050-003-01	12V	13.5/50	TPU	2 m / 6.5 ft	14	1/2"NPT
SFSP2-050-003-01	24V	13.5/50	TPU	2 m / 6.5 ft	7	1/2"NPT

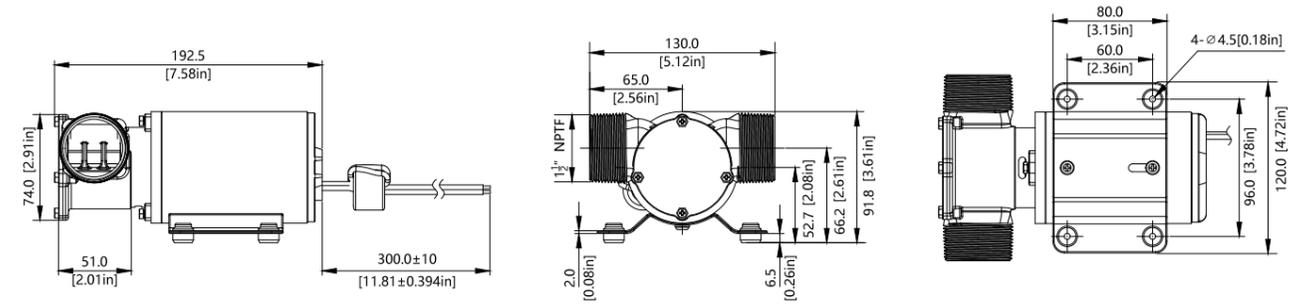

Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Head	Amp (A)	Ports
SFSP1-113-009-02	12V	30/113	TPU	2 m / 6.5 ft	20	1-1/2"NPT
SFSP2-113-009-02	24V	30/113	TPU	2 m / 6.5 ft	10	1-1/2"NPT

Piston Hand Pumps

FEATURES & BENEFITS

Portable design - lightweight
Ease of use - versatile flexible outlet pipe
Ready to pump - 1.3"/34 mm hose no fittings or plumbing required
Ease of operation - simple handle plunger
Suitable for bilge water or diesel transfer
Available in two barrel lengths 369 mm (14.5") or 629 mm (24.8")
Lighter and smoother compare with old hand pump

TYPICAL APPLICATIONS


Marine
Kayaks & Canoes
RV & Campers
Industrial




Standard Accessory



PE Bag

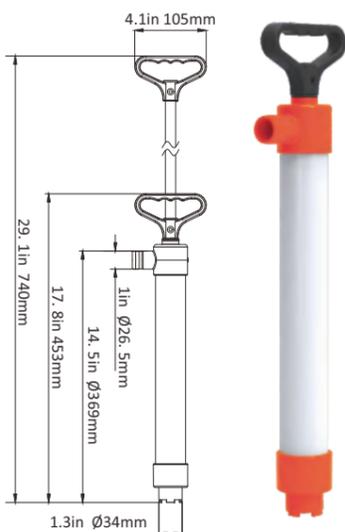

Short Barrel Version (740)

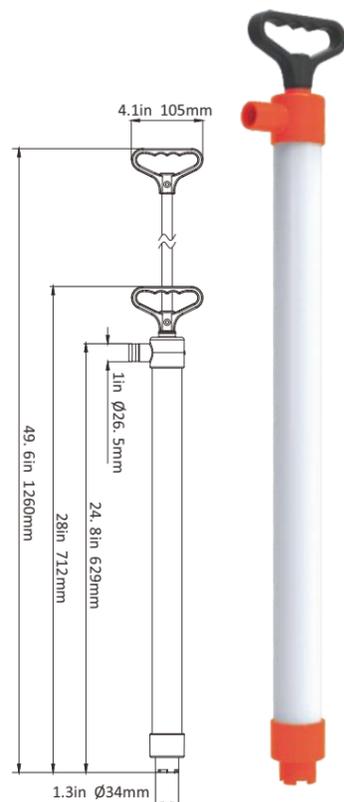

Long Barrel Version (1260)

Standard Pump Configurations


	Short Barrel Version		Long Barrel Version	
	SFPH-H740-01	SFPH-H740-02	SFPH-H1260-01	SFPH-H1260-02
Product Code	SFPH-H740-01	SFPH-H740-02	SFPH-H1260-01	SFPH-H1260-02
color	white	black	white	black
Hose Connections	34 mm (1.3") Hose Connections		34mm(1.3") Hose Connections	
Weight	0.93 lbs (0.42 kg)		1.14 lbs (0.52 kg)	
Materials	Pump body: PVC, Valve: EPDM		Pump body: PVC, Valve: EPDM	
Materials In Contact with Fluid	PVC, EPDM		PVC, EPDM	
Suction Lift	1 m (3ft)		1 m (3ft)	
Discharge Head	0.5 m (1.5ft)		0.5 m (1.5ft)	
45 Strokes per Minute	15.8 ltrs (4.2 US gals)		27 ltrs (7.1 US gals)	
70 Strokes per Minute	24.5 ltrs (6.5 US gals)		42 ltrs (11.1 US gals)	

Diaphragm Hand Pumps

FEATURES & BENEFITS

Proven design - tough yet lightweight polypropylene materials
Versatility of installation
Simple plumbing- 1-1/4" (34 mm) smooth hose connection options
Ease of operation - molded grip handle

Easy maintenance - easy remove diaphragm
Secure fit - robust molded base
Compact design - ideal for confined spaces
Reliable performance - U-shaped outlet valve
Efficient performance - up to 5.3 Gallons Per Minute

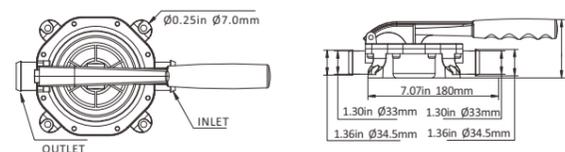


Plastic hand pump (SFDHP-G720-01 without fittings)

Product Code	SFDHP-G720-01
Hose Connections	34.5 mm (1.36") Hose Connections
Weight	0.99 lbs (0.45 kg)
Materials	Pump Body: Glass-filled Polypropylene, Diaphragm: EPDM, Fasteners: Stainless Steel
Materials On Contact with Fluid	Glass-filled Polypropylene, EPDM, Stainless Steel



Color Box

Kraft Box

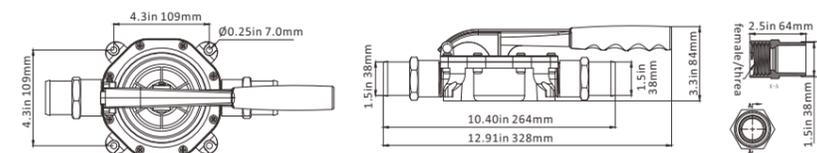


Plastic hand pump (SFDHP-G720-02 with HPF01 fittings)

Product Code	SFDHP-G720-02
Hose Connections	38.1 mm (1.5") Hose Connections
Weight	0.54 kg (1.19 lbs)
Materials	Pump Body: Glass-filled Polypropylene, Diaphragm: EPDM, Fasteners: Stainless Steel
Materials On Contact with Fluid	Glass-filled Polypropylene, EPDM, Stainless Steel



HPF01 Material: PP

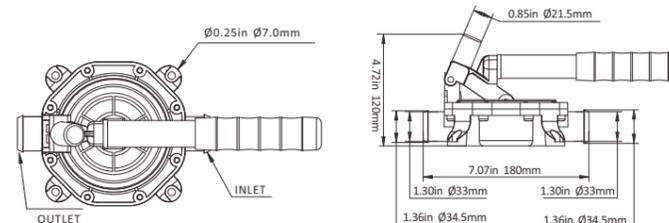

Aluminum hand pump

Product Code	SFDHA-G720-01
Hose Connections	34.5 mm (1.36") Hose Connections
Weight	1.25 lbs (0.57 kg)
Materials	Pump Body: Glass-filled Polypropylene, Diaphragm: EPDM, Fasteners: Stainless Steel
Materials On Contact with Fluid	Glass-filled Polypropylene, EPDM, Stainless Steel



Color Box

Kraft Box

NEW



NEW





Livewell-baitwell Pumps 13C Series 800/1100 GPH

FEATURES & BENEFITS

- Discharge nozzle can be rotated 360 degrees for optimal installation
- Pump housing can rotate 360 degrees to allow positioning of the discharge outlet
- Dual port fitting for optional washdown pump
- Includes removable discharge straight and elbow fittings
- Quick one hand "push button" motor cartridge removal system
- Anti-Airlock protection

Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.

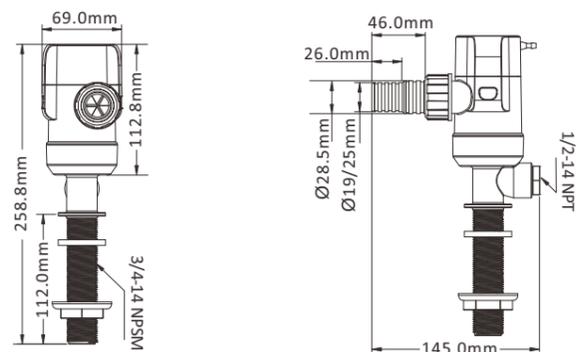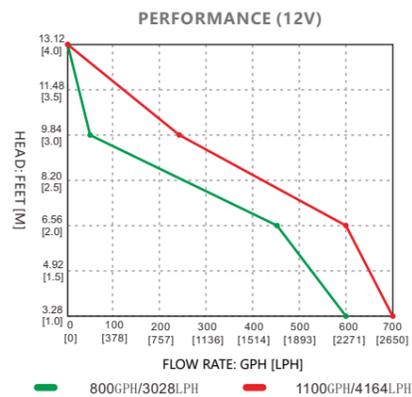

Standard Pump Configurations



Pump Model	Motor Model	Flow rate	Volts	Current	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFBP1-G800-13C	SFMA1-G800-13A	800GPH	12V	3.5A	3m/9ft	3' (1 m)	3/4" (19mm)	0.55KG/0.60KG
SFBP2-G800-13C	SFMA2-G800-13A	800GPH	24V	2.0A	3m/9ft	3' (1 m)	1 1/8" (29mm)	0.55KG/0.60KG
SFBP1-G1100-13C	SFMA1-G1100-13A	1100GPH	12V	4.0A	4m/12ft	3' (1 m)	1" (25mm)	0.55KG/0.60KG
SFBP2-G1100-13C	SFMA2-G1100-13A	1100GPH	24V	2.5A	4m/12ft	3' (1 m)	1 1/8" (29mm)	0.55KG/0.60KG

Livewell-baitwell Pumps 13E Series 800/1100 GPH

FEATURES & BENEFITS

- Pump housing can rotate 360 degrees to allow positioning of the discharge outlet
- Discharge nozzle can be rotated 360 degrees for optimal installation
- Dual port fitting for optional washdown pump
- Quick one hand "push button" motor cartridge removal system
- Includes removable discharge straight and elbow fittings
- Anti-Airlock protection

Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.

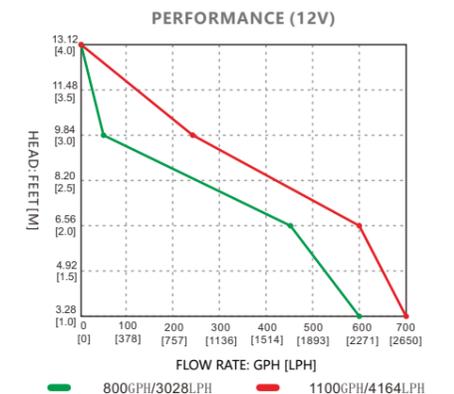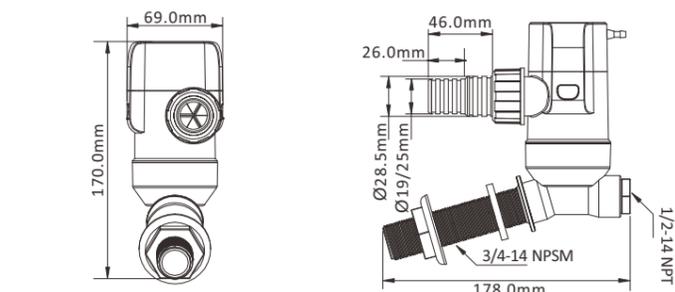

Standard Pump Configurations

Pump Model	Motor Model	Flow rate	Volts	Current	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFBP1-G800-13E	SFMA1-G800-13A	800GPH	12V	3.5A	3m/9ft	3' (1 m)	3/4" (19mm)	0.55KG/0.60KG
SFBP2-G800-13E	SFMA2-G800-13A	800GPH	24V	2.0A	3m/9ft	3' (1 m)	1 1/8" (29mm)	0.55KG/0.60KG
SFBP1-G1100-13E	SFMA1-G1100-13A	1100GPH	12V	4.0A	4m/12ft	3' (1 m)	1" (25mm)	0.55KG/0.60KG
SFBP2-G1100-13E	SFMA2-G1100-13A	1100GPH	24V	2.5A	4m/12ft	3' (1 m)	1 1/8" (29mm)	0.55KG/0.60KG






Livewell-baitwell Pumps 13D Series 800/1100 GPH

FEATURES & BENEFITS

- Pump housing can rotate 360 degrees to allow positioning of the discharge outlet
- Discharge nozzle can be rotated 360 degrees for optimal installation
- Dual port fitting for optional washdown pump
- Quick one hand "push button" motor cartridge removal system
- Includes removable discharge straight and elbow fittings
- Anti-Airlock protection

Split quick-connect joint design no need to disconnect base or plumbing when replacing pump.

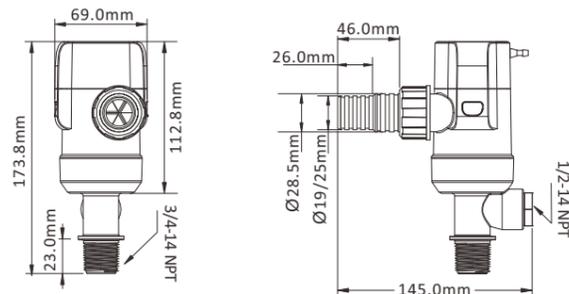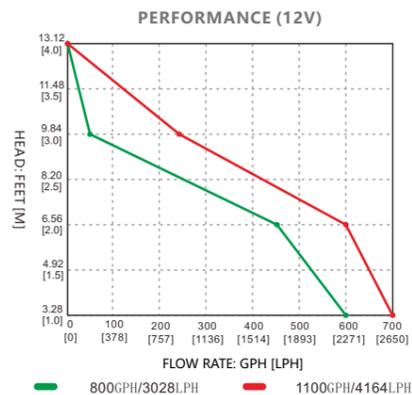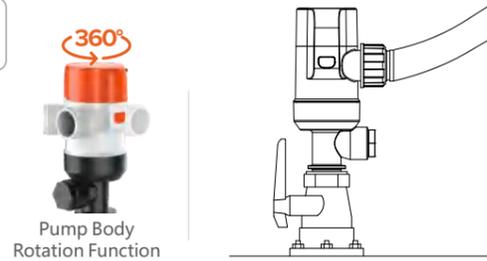



Standard Pump Configurations

Pump Model	Motor Model	Flow rate	Volts	Current	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFBP1-G800-13D	SFMA1-G800-13A	800GPH	12V	3.0A	3m/9ft	3' (1 m)	3/4" (19mm)	0.50KG/0.55KG
SFBP2-G800-13D	SFMA2-G800-13A	800GPH	24V	1.6A	3m/9ft	3' (1 m)	1 1/8" (29mm)	0.50KG/0.55KG
SFBP1-G1100-13D	SFMA1-G1100-13A	1100GPH	12V	3.5A	4m/12ft	3' (1 m)	1" (25mm)	0.50KG/0.55KG
SFBP2-G1100-13D	SFMA2-G1100-13A	1100GPH	24V	1.8A	4m/12ft	3' (1 m)	1 1/8" (29mm)	0.50KG/0.55KG


Protobale Livewell Aerator Kit 13F Series 600/800 GPH

FEATURES & BENEFITS

- Motor can be sold separately
- Discharge nozzle can be rotated 360 degrees for optimal installation
- Quick one hand "push button" motor cartridge removal system
- Includes Aerator spray head and Stainless Steel strainer
- Flow: 600 & 800 gph in 12 volt version
- Marine grade blocked wiring
- Entirely submersible
- Quiet and vibration-less operation

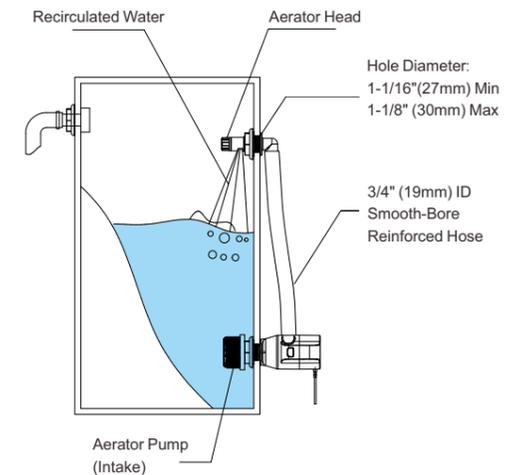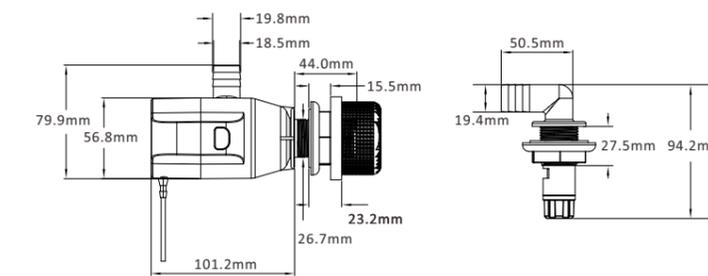

INCLUDED

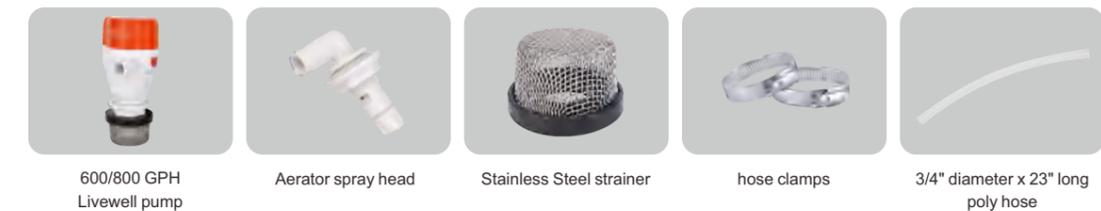

Standard Pump Configurations

Pump Model	Motor model	Voltage	Flow rate	Current	Outlet Dia.
SFBP1-G600-13F	SFMA1-G600-13A	12V	600GPH	2.4A	3/4" (19mm)
SFBP1-G800-13F	SFMA1-G800-13A	12V	800GPH	3.5A	3/4" (19mm)



NEW




Color Box

NEW






Color Box

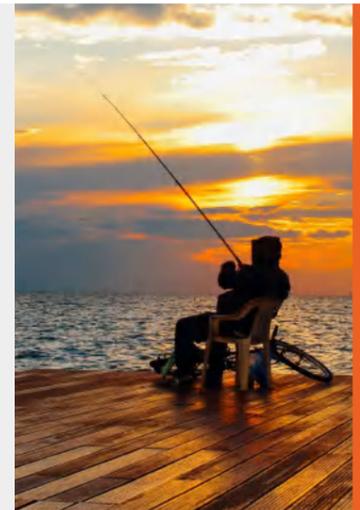

Dual Port Livewell Pump 1600 GPH

FEATURES & BENEFITS

- 1600 GPH (6054 LPH) dual port, 12V & 24V
- Dual port base design for easy customer selection
- Silent and vibration-free operation
- Easy to install and remove for cleaning
- Anti-airlock feature, heavy-duty long-life motor
- Can be easily installed into any valve fitting with 1" NPT male thread

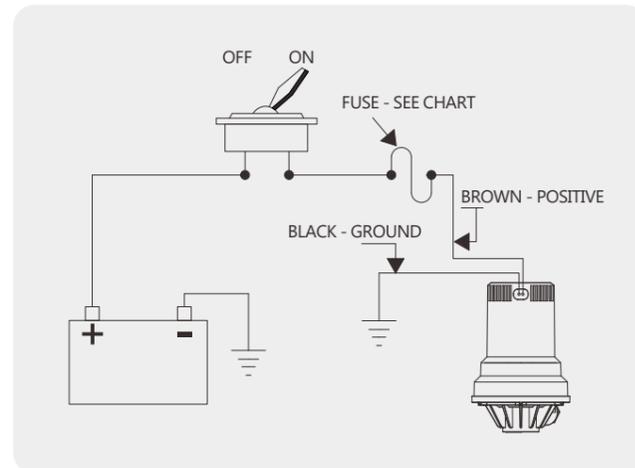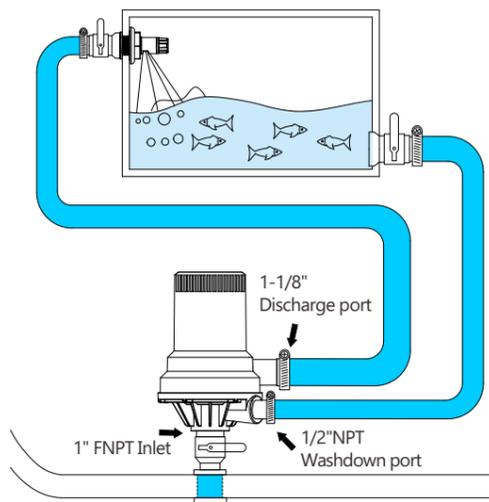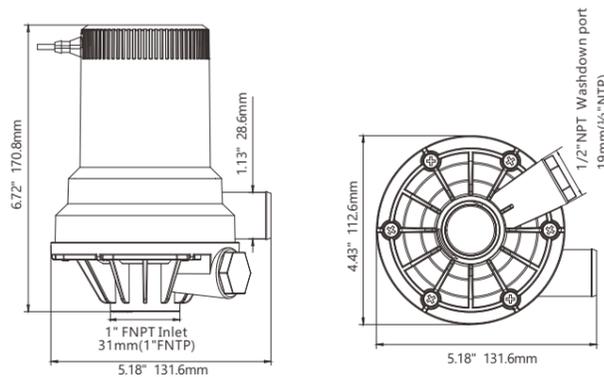




Standard Pump Configurations

Model	Flow rate (GPH/LPH)	Volts	Amp Draw	Head	Inlet Ports	Outlet Port
SFBP1-G1600-01A	1600 / 6057	12V	8.4A	4.2m	1" NPT/ 31mm	1-1/8" and 1/2" NPT
SFBP2-G1600-01A	1600 / 6057	24V	4.2A	4.2m	1" NPT/ 31mm	1-1/8" and 1/2" NPT

General Purpose Pump 3800 GPH

FEATURES & BENEFITS

- Easy to install and remove for cleaning
- Compact, efficient and long-life motor
- Entirely Submersible
- Rust and corrosion proof
- Silent and vibration-free operation
- Shock-absorbing reinforced base
- Anti-Airlock protection
- 1.5" (38mm) Discharge port

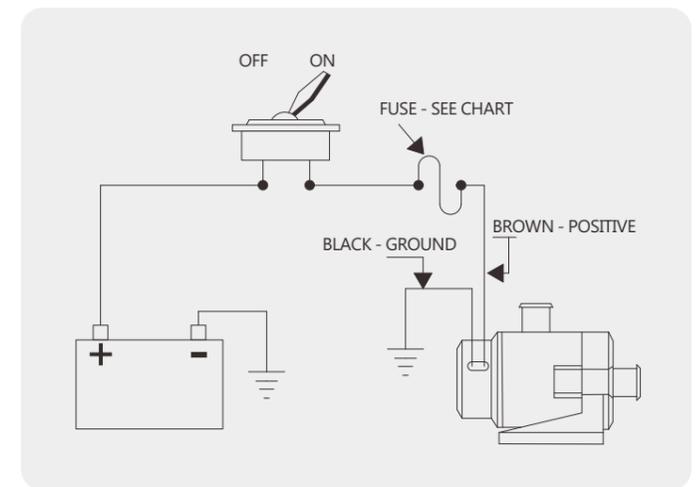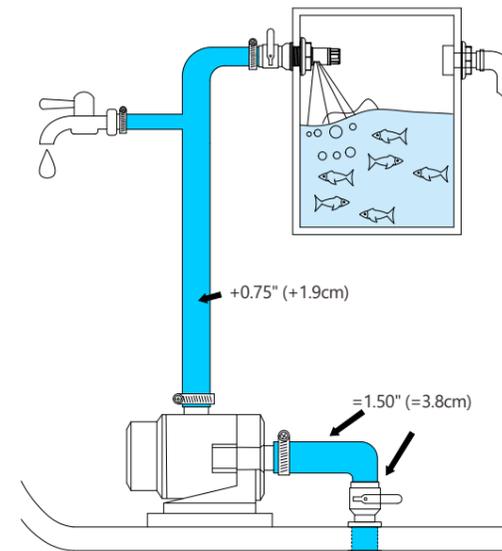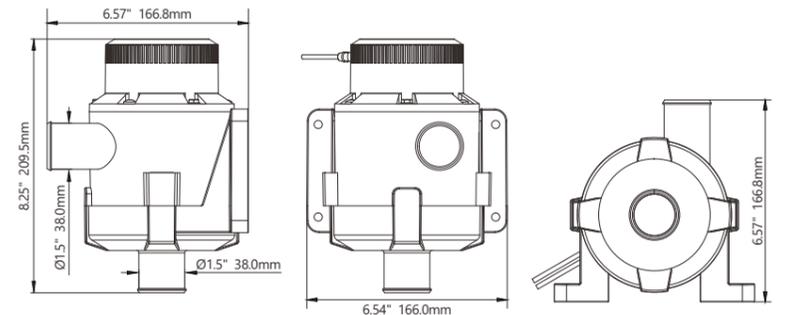

Standard Pump Configurations

Model	Flow rate (GPH/LPH)	Volts	Amp Draw	Fuse Size	Head	Ports
SFBP1-G3800-01A	3800/14383	12V	15.5A	25A	5.3m	1-1/2" / 38mm
SFBP2-G3800-01A	3800/14383	24V	6.9A	15A	5.3m	1-1/2" / 38mm



Blister



Quick change feature removes and installs in seconds!



Blister



Quick change feature removes and installs in seconds!





Livewell / Baitwell Pumps 04 Series **600/800 GPH**

FEATURES & BENEFITS

- Robust, easy click-in, replaceable motor
- Built-in through-hull
- Water cooled motor housing
- Flow: 350, 600 & 800 gph in 12 volt version
- Marine grade blocked wiring
- Stainless steel shaft
- Quiet and vibrationless operation
- 18 AWG, 1 m long Leads

MOTOR

- Type**
Cartridge-Style, easy replace, long life motor
- Temperature Limits**
110 °F (43 °C) Max.
- Duty Cycle**
Intermittent
- Voltage**
12 v

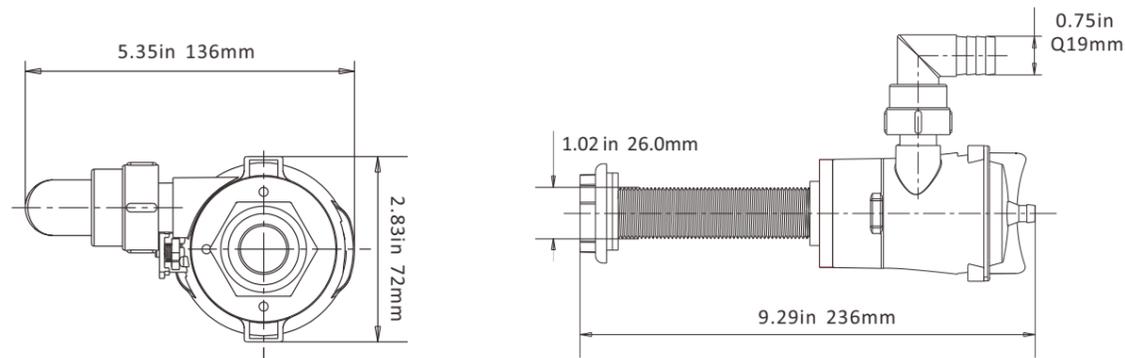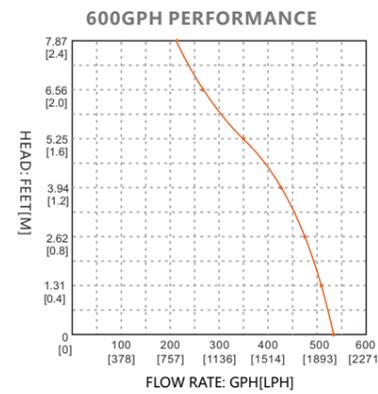

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-04	600 GPH	12V	3.0 A	3.5 m/11.5'	1 m/3'	19 mm/3/4"	0.4/0.5 kg
SFBP1-G800-04	800 GPH	12V	4.0 A	4.0 m/13'	1 m/3'	19 mm/3/4"	0.4/0.5 kg



Livewell / Baitwell Pumps 05 Series **600/800 GPH**

FEATURES & BENEFITS

- Robust, easy click-in, replaceable motor
- Built-in through-hull
- Water cooled motor housing
- Flow: 350, 600 & 800 gph in 12 volt version
- Marine grade blocked wiring
- Stainless steel shaft
- Quiet and vibrationless operation
- 18 AWG, 1 m long Leads

MOTOR

- Type**
Cartridge-Style, easy replace, long life motor
- Temperature Limits**
110 °F (43 °C) Max.
- Duty Cycle**
Intermittent
- Voltage**
12 v

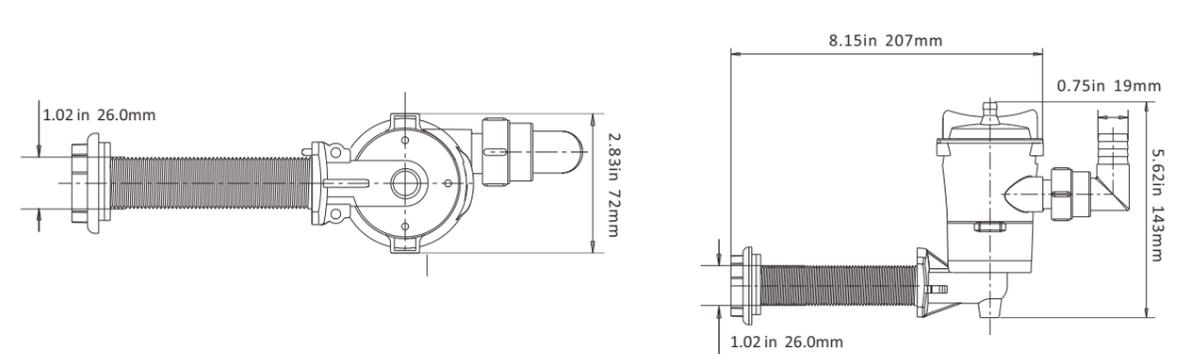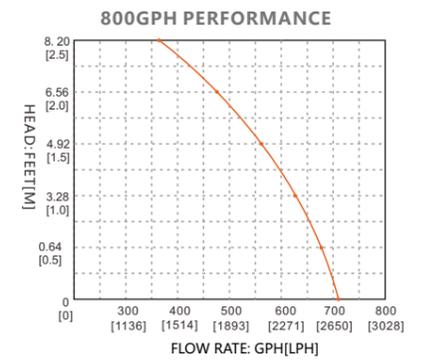

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G600-05	600 GPH	12V	3.0 A	3.5 m/11.5'	1 m/3'	19 mm/3/4"	0.42/0.58 kg
SFBP1-G800-05	800 GPH	12V	4.0 A	4.0 m/13'	1 m/3'	19 mm/3/4"	0.42/0.58 kg



Portable Aerator Kit 350 GPH

FEATURES & BENEFITS

- Aerates from 5 to 30 gallons (19 to 113 liters) of water.
- The SEAFLO 350 GPH (1325 LPH) pump attaches easily to any non-porous surface.
- 9.4" (240 mm) long spray tube can be custom cut to fit into any container.
- A fully adjustable spray head increases or reduces flow of water.
- Foam filtration system keeps water sparkling clean.
- The kit also includes battery clips for easy attachment to your 12 volt power source.
- 18 AWG, 1 m long Leads

MOTOR


Type
Compact, efficient, long life motor

Temperature Limits
110 °F (43 °C) Max.

Duty Cycle
Intermittent

Voltage
12 V

Standard Accessories

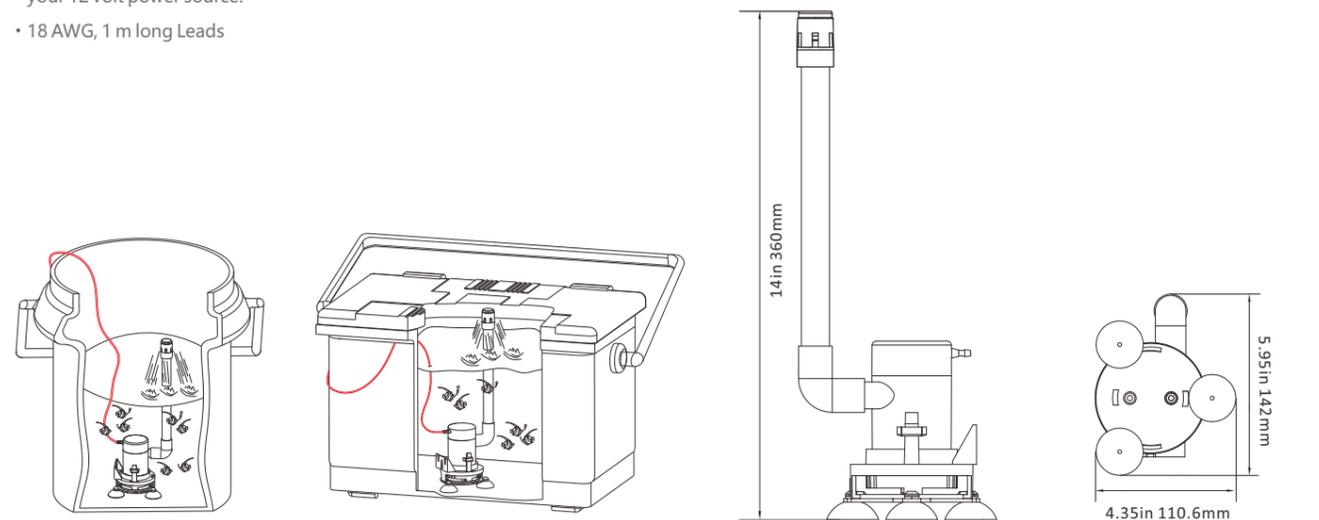

Standard Pump Configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-09	350 GPH	12 V	1.0 A	1.5 m / 5'	1 m / 3'	19 mm / 3/4"	0.32 / 0.42 kg

Portable Aerator Kit 350 GPH

FEATURES & BENEFITS

- Aerates from 5 to 30 gallons (19 to 113 liters) of water.
- The SEAFLO 350 GPH (1325 LPH) pump attaches easily to any non-porous surface.
- 6.3" (160 mm) long spray tube, 13.8" (350 mm) hosepipe can be custom cut to fit into any container.
- A fully adjustable spray head increases or reduces flow of water.
- Foam filtration system keeps water sparkling clean.
- The kit also includes battery clips for easy attachment to your 12 volt power source.
- 18 AWG, 1 m long Leads

MOTOR



Type
Compact, efficient, long life motor

Temperature Limits
110 °F (43 °C) Max.

Duty Cycle
Intermittent

Voltage
12 V

Standard Accessories

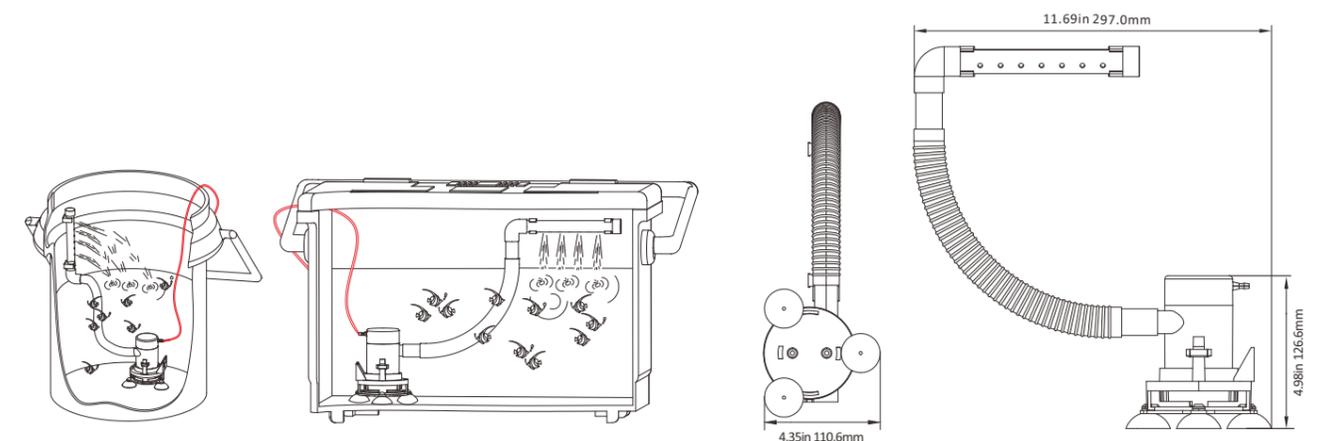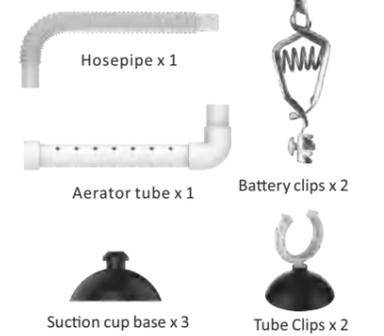

standard pump configurations

Model	Flow rate	Volts	Current	Head	Wire lead	Outlet Dia.	N.W./G.W.
SFBP1-G350-10	350 GPH	12 V	1.0 A	1.5 m / 5'	1 m / 3'	19 mm / 3/4"	0.32 / 0.42 kg




Blister




Blister

Color Box

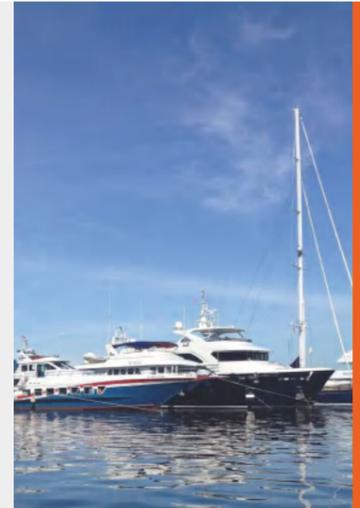

Float Switch 01 Series

- Ideal flow sensor for bilge pumps
- 20A Max.
- Heavy duty flow switch is designed for the toughest applications
- Turns pump on when water level reaches 2.0" (51 mm)

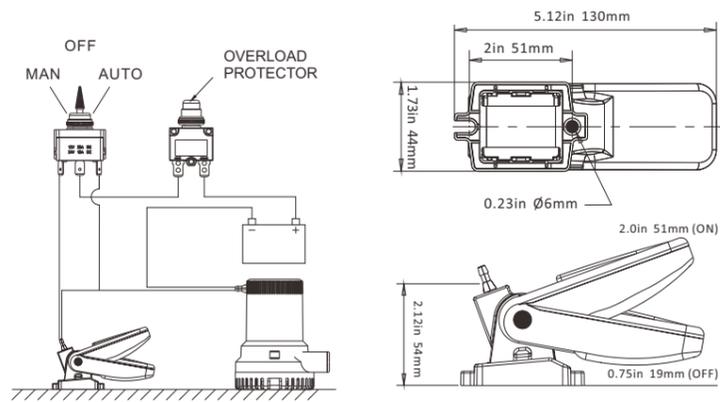


Standard Pump Configurations

Model	Max Amps 12volts	Max Amps 24volts	Wire Lead	Wire Gauge Size	N.W.
SFBS-20-01	20 A	10 A	1 m	18 AWG	0.16 kg

Float Switch 02 Series

- Ideal flow sensor for bilge pumps
- 18A Max.
- Unique internal steel bearing activation
- Turns pump on when water level reaches 2.3" (60 mm)

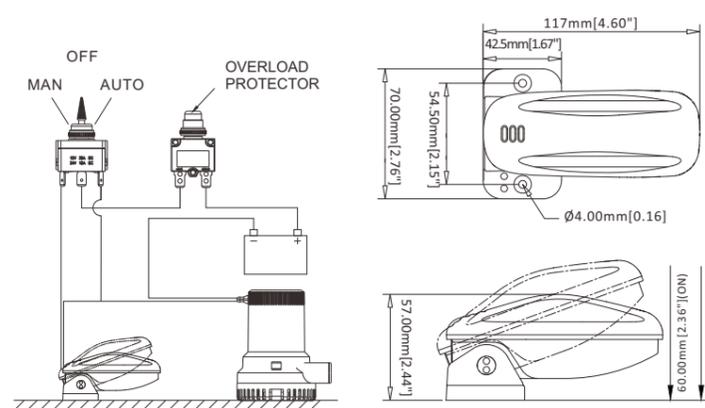


Standard Pump Configurations

Model	Max Amps 12volts	Max Amps 24volts	Wire Lead	Wire Gauge Size	N.W.
SFBS-18-02	18 A	8 A	1 m	16 AWG	0.14 kg

Electromagnetic Float Switch 05 Series 25 A

FEATURES & BENEFITS

- Innovative Electromagnetic Design
- Enclosed Construction Offers Advanced Reliability
- Strainer housing protects switch from debris
- Quick Attach Base Offers Simple Maintenance
- Works with Any Manual Bilge Pump
- Designed for Pumps Up To 25 Amps
- Mercury Free

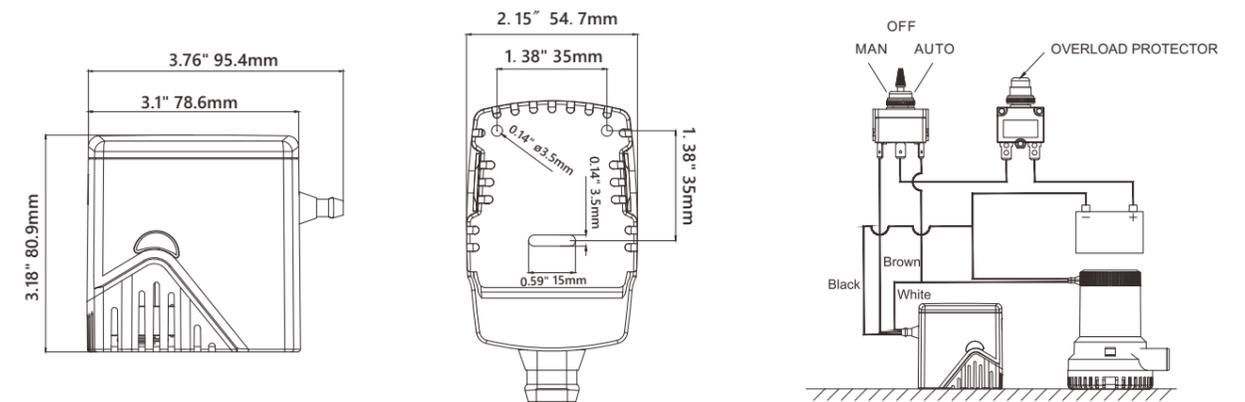

Standard Pump Configurations



Model	Max Amps	Wire Gauge Size	Wire Lead	N.W.
SFBS-25-05	25 A	16 AWG	1 m	0.2 kg



Float Switch 03 Series **25A**

FEATURES & BENEFITS

- Larger float and drive structure for better stability
- Amp draws up to 25 A
- Idea flow sensor for bilge pump
- Mercury free
- Compact design, easy installation
- Strainer housing protects switch from debris
- Turn on when water level higher than 45-55 mm (1.77"-1.97")
- Turn off when water level lower than 20-25 mm (0.79"-0.98")

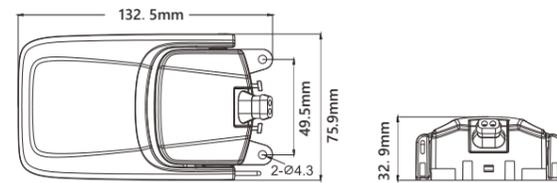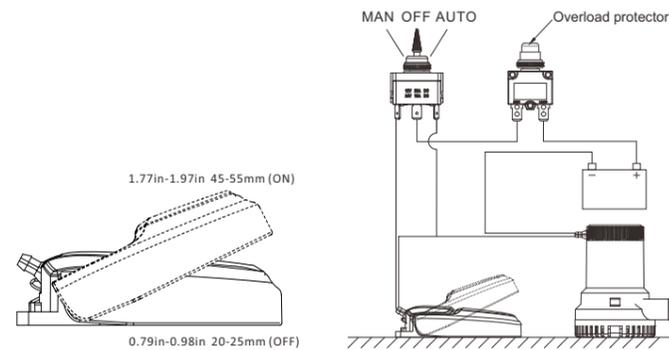



Standard Pump Configurations

Model	Max Amps	Wire Gauge Size	Wire Lead	N.W.	Filter Housing
SFBS-25-03A	25 A	14 AWG	1 m	0.12 kg	NO

Float Switch 04 Series **12A**


FEATURES & BENEFITS

- Larger float and drive structure for better stability
- Amp draws up to 12 A
- Idea flow sensor for bilge pump
- Mercury free
- Compact design, easy installation
- Strainer housing protects switch from debris
- Turn on when water level higher than 45-55 mm (1.77"-1.97")
- Turn off when water level lower than 20-25 mm (0.79"-0.98")

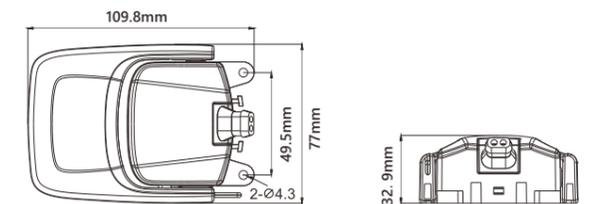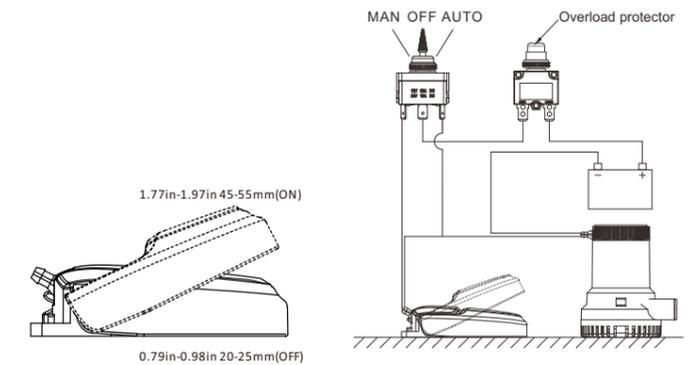


Standard Pump Configurations

Model	Max Amps	Wire Gauge Size	Wire Lead	N.W.	Filter Housing
SFBS-12-04A	12 A	16 AWG	1 m	0.11 kg	NO

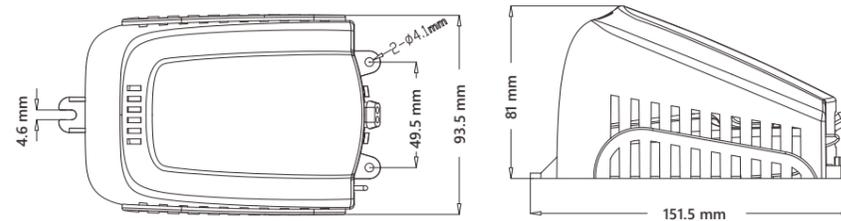

Standard Pump Configurations

Model	Max Amps	Wire Gauge Size	Wire Lead	N.W.	Filter Housing
SFBS-25-03B	25 A	14 AWG	1 m	0.19 kg	YES

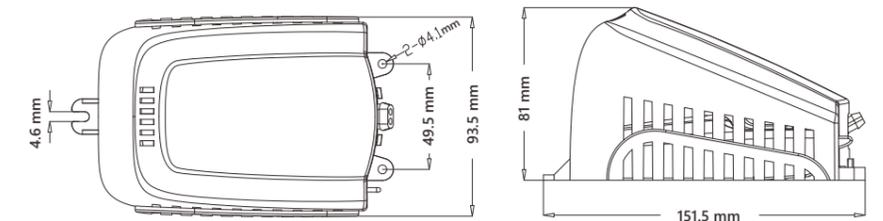

Standard Pump Configurations

Model	Max Amps	Wire Gauge Size	Wire Lead	N.W.	Filter Housing
SFBS-12-04B	12 A	16 AWG	1 m	0.18 kg	YES



NEW




Electric Field Bilge Switch 06 Series



This SEAFLO electric field sensor senses water level and automatically controls a 12 or 24 volt bilge pump. The switch turns on when it senses 41mm (1.6") water level and turns off when water is below 9.5mm (0.37"). This product is designed for use in pleasure boat applications, and is not intended to be used in commercial marine & boating applications or for any other use.

FEATURES & BENEFITS

- Ideal for use with electric bilge pump
- Rated to handle pumps up to 20A at 12V or 10A at 24V
- No moving parts, totally sealed solid state electronics and field detectors
- No exposed sensors eliminate corrosion possibilities
- Activates at a 41mm (1.6") fluid level and deactivates at a 9.5 mm (0.37") fluid level
- A three second delay prevents false starts from water sloshing in the bilge
- Easy to install, mounted on either horizontal or vertical surface (e.g. bulkhead or hull)

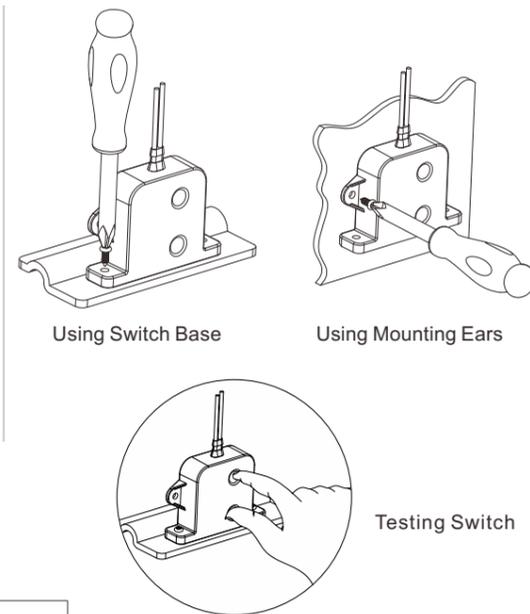

INSTALLATION DIMENSION DRAWING

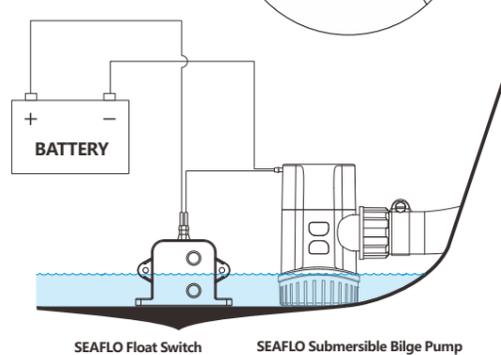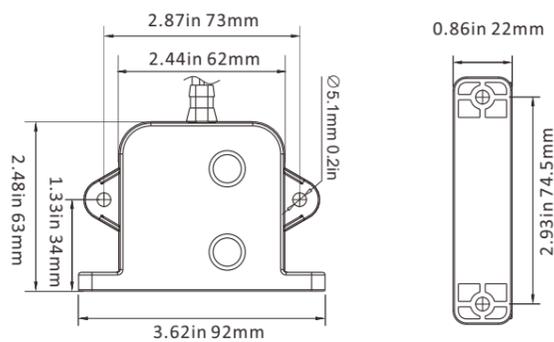

Model Number	Voltage	Current	Wire Gauge Size /length	N.W.
SFBS-20-06	12V/24V DC	20A at 12V or 10A at 24V	16AWG/1000mm	0.1KG

Alarm Control System **NEW**

FEATURES & BENEFITS

- Detects water and sends a signal (3 seconds delay) to the alarm and switch
- Switch activates the Bilge Pump at a 41mm/1.6" fluid level and deactivates at a 9.5mm/0.37" fluid level
- 3 second delay prevents false starts
- Totally sealed fluid detector is never in contact with water, will not corrode and is not affected by oil or debris



Model Number	Voltage	Current	Alarm volume	N.W.	Wire Gauge Size /length
SFWAS1-20-03	12V DC	20 Amps. Max	≥85DB	0.2KG	16AWG/1000mm (Bilge Switch)
SFWAS2-10-03	24V DC	10 Amps. Max	≥85DB	0.2KG	16AWG/100mm (Alarm Switch)

Water Level Alarm System **NEW**

FEATURES & BENEFITS

- Consists of an electric field bilge switch and a 95 dB alarm
- Detects water and sends a signal (3 seconds delay) to the alarm
- Switch activates the Bilge Pump at a 41mm/1.6" fluid level and deactivates at a 9.5mm/0.37" fluid level
- 3 second delay prevents false starts
- Precision switch automatically activates and shuts off alarms when water reaches specific levels
- No moving parts, totally sealed solid state electronics and field detectors



Model Number	Voltage	Current	Alarm volume	N.W.	Wire Gauge Size /length
SFWAS1-20-01	12V DC	20 Amps. Max	≥95DB	0.2KG	18AWG/1000mm (Switch)
SFWAS2-10-01	24V DC	10 Amps. Max	≥95DB	0.2KG	28AWG/150mm (Alarm)

High Water Bilge Alarm **NEW**

FEATURES & BENEFITS

- A safety reminder device integrating vision and hearing
- Consists of a float switch and a 95 DB alarm
- Allows an unarmed compartment to be constantly monitored
- Turn on when water level higher than 45-55mm(1.77"-1.97")
- Turn off when water level lower than 20-25mm(0.79"-0.98")
- The float switch comes with a filter housing to keep debris out



Model Number	Voltage	Current	Alarm volume	N.W.	Wire Gauge Size /length
SFWAS1-20-02	12V DC	20 Amps. Max	≥95DB	0.3KG	16AWG/1000mm (Switch)
SFWAS2-10-02	24V DC	10 Amps. Max	≥95DB	0.3KG	28AWG/150mm (Alarm)

Alarm Switch Panel

FEATURES & BENEFITS

- For use with seaflo electric field bilge switch, precise operation ensures proper bilge pumping and provides peace of mind
- Controls any pump equipped with an automatic float switch
- Unique 3-way switch disables piezo alarm while keeping warning LED lit
- Marine switch panel, easy to install



Model Number	Voltage	Current	Wire Gauge Size /length	Alarm volume	N.W.
SFASP1-01	12V DC	20 Amps. Max	16AWG/100mm	≥85DB	0.2KG
SFASP2-01	24V DC	10 Amps. Max	16AWG/100mm	≥85DB	0.2KG

Water Alarm


A safety reminder device integrating vision and hearing. Allows an unarmed compartment to be constantly monitored.



Model Number	Voltage	Current	Wire Gauge Size /length	Alarm volume	N.W.
SFWA1-01	12V DC	20 Amps. Max	28AWG/150mm	≥95DB	0.1KG
SFWA2-01	24V DC	10 Amps. Max	28AWG/150mm	≥95DB	0.1KG

2/3-way Switch Panel



Black aluminum panel
Control any pump equipped with a float switch
Prevent impact of intermittent high current
Toggle of SFSP-01 has three positions (automatic, off, or manual)
Toggle of SFSP-02 has "on" and "off" providing fingertip control

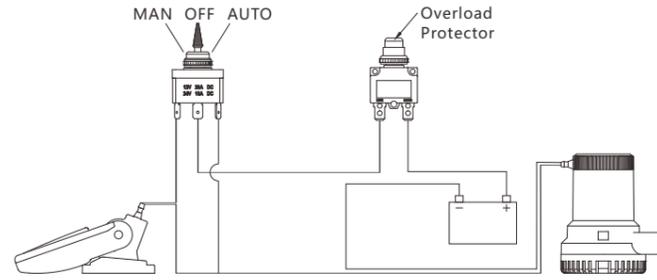

Blister



Blister

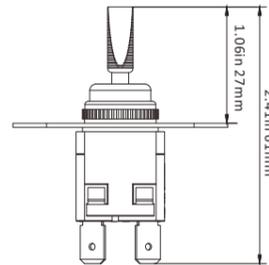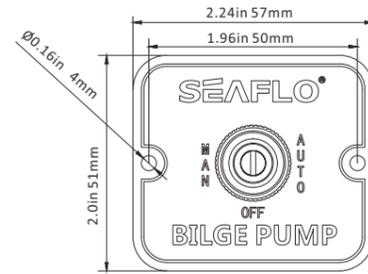




Model	SFSP-01
Volts	12 V & 24 V
Led Light	Yes
Panel Material	Aluminum
Position	MAN-OFF-AUTO
N.W.	45 g
Dimension	57 mm*51 mm

Model	SFSP-02
Volts	12 V & 24 V
Led Light	Yes
Panel Material	Aluminum
Position	OFF-ON
N.W.	45 g
Dimension	57 mm*51 mm

3-way Switch Panel

LED indicator when switch is on
Control any pump equipped with a float switch
Prevent impact of intermittent high current

Toggle has three positions (automatic, off, or manual)
SFSP-015-01 is black aluminum panel
SFSP-015-02 is black plastic panel

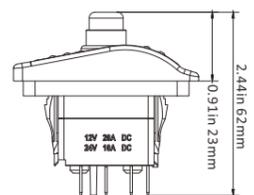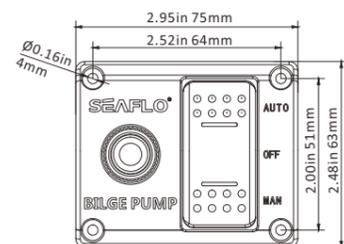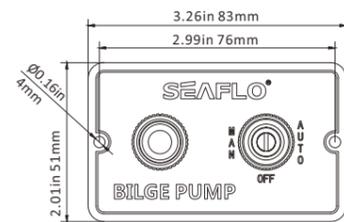



Model	SFSP-015-01
Volts	12 V & 24 V
Fuse	15 A
Led Light	Yes
Panel Material	Aluminum
Position	MAN-OFF-AUTO
N.W.	60 g
Dimension	83 mm*51 mm

Model	SFSP-015-02
Volts	12 V & 24 V
Fuse	15 A
Led Light	Yes
Panel Material	Plastic
Position	MAN-OFF-AUTO
N.W.	62 g
Dimension	75 mm*63 mm

Submersible And Line Pump 280/500 GPH

FEATURES & BENEFITS


- Able to pump 40 °C diesel , 80 °C sea water
- Able to run about 20 minutes
- Portable to carry on
- Easy installation
- Intermittent duty
- "A" refers to 5m leads with clip, "B" refers to 1m leads

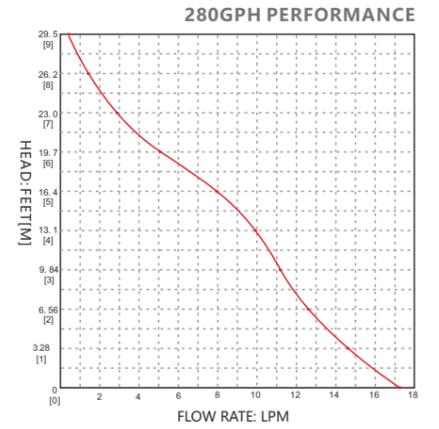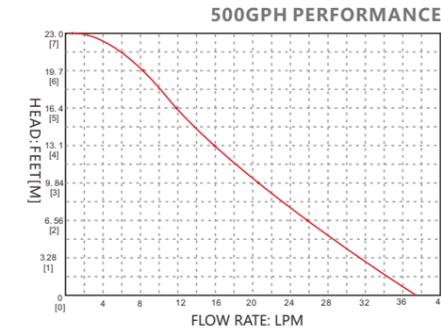

Blister



Can be split to use

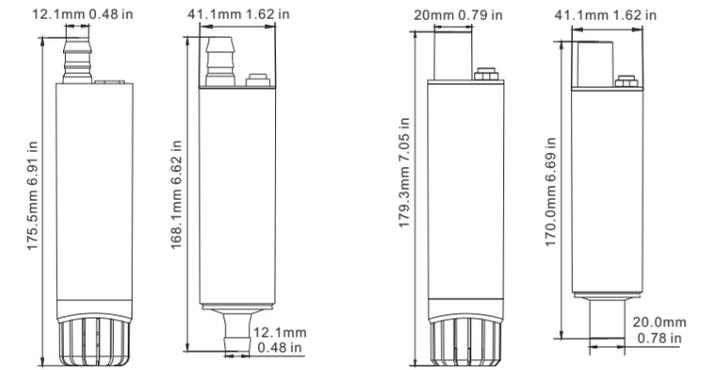

280 GPH

500 GPH

standard pump configurations


Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G280-02A	280 GPH	12 V	4.5 A	7.5 A	7 m/23'	5 m/16'	1/2"
SFSP1-G500-02A	500 GPH	12 V	4.5 A	7.5 A	7 m/23'	5 m/16'	3/4"



Blister



Can be split to use

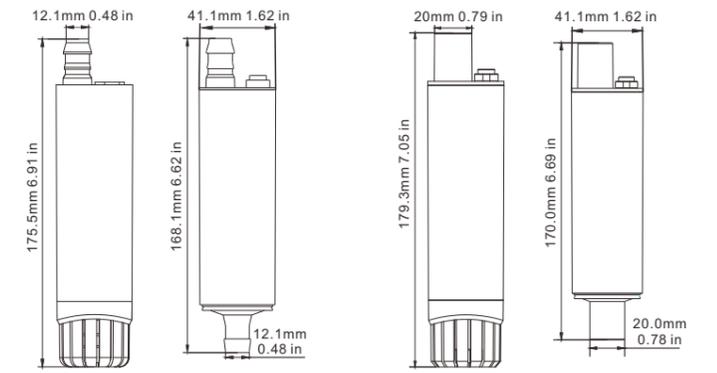

280 GPH

500 GPH

standard pump configurations

Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G280-02B	280 GPH	12 V	4.5 A	7.5 A	7 m/23'	1 m/3'	1/2"
SFSP1-G500-02B	500 GPH	12 V	4.5 A	7.5 A	7 m/23'	1 m/3'	3/4"



Blister






PE Bag



Submersible And Line Pump **200 GPH**

FEATURES & BENEFITS

- Able to pump 80 °C sea water
- Able to run about 20 minutes
- Portable to carry on
- Easy installation
- Intermittent duty

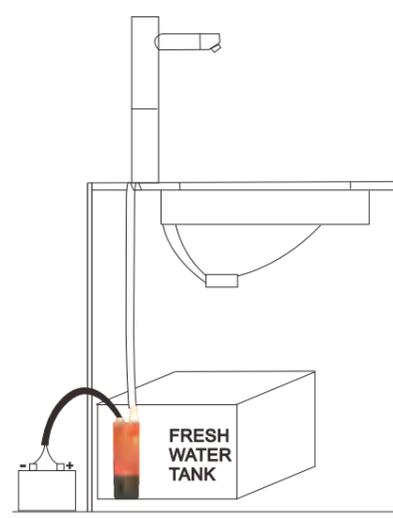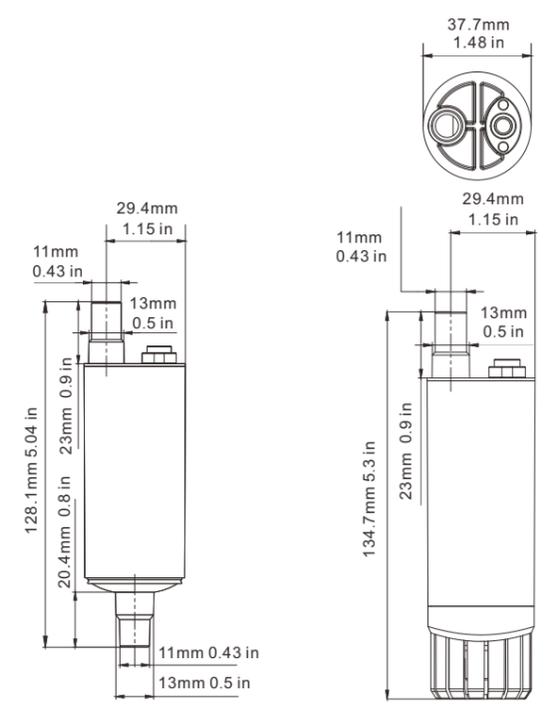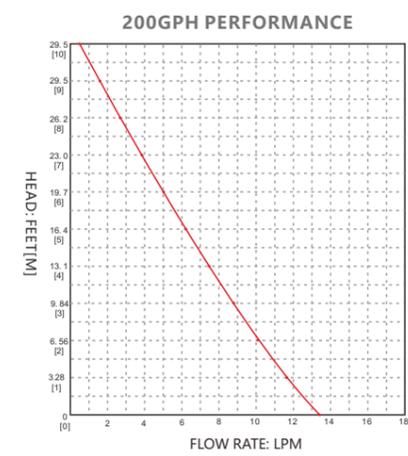

standard pump configurations

Model	Flow Rate	Voltage	Max Draw	Fuse Amps	Head	Wire Lead	Outlet Dia.
SFSP1-G200-03B	200 GPH	12 V	4.5 A	7.5 A	5 m/16.4'	1 m/3'	2/5" / 1/2"

Low Voltage Submersible Pump 01 Series **12/16 LPM**

FEATURES & BENEFITS




- Pumps up to 18 vertical feet
- 1/2" Outlet
- Ideal for backup battery sump
- Quiet and vibrationless operation
- Completely submersible
- 18 AWG, 1 m long Leads

PUMP

- Priming Capabilities**
Flooded suction
- Power**
2.8 amps max current draw
- Flow**
3.2 & 5.0 GPM Models Available



MOTOR

- Type**
Compact, efficient, long life motor
- Temperature Limits**
110 °F (43 °C) Max.
- Duty Cycle**
Intermittent (30 minutes)

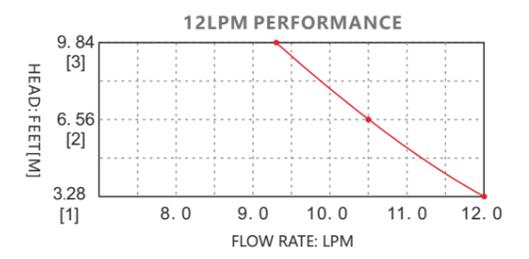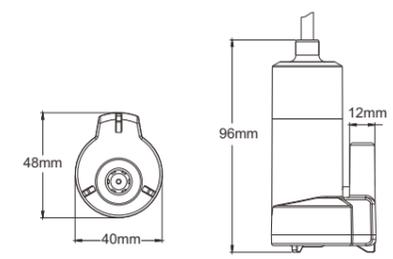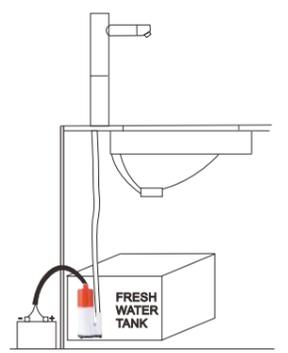

Standard Pump Configurations

Model	Voltage	Max Amps	Flow rate	Bar	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFSP1-L012-01	12 V	2.0 A	12 LPM	0.6 bar	5 m/16.4'	1 m/3'	12 mm / 1/2"	0.16 / 0.18 kg

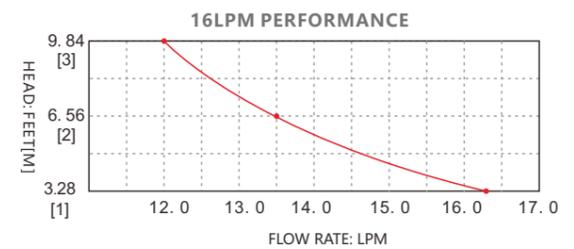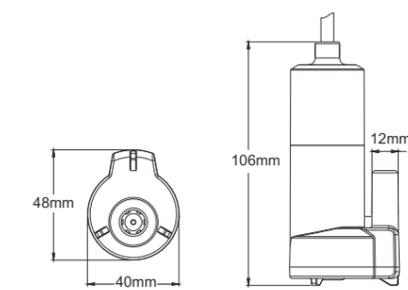

Standard Pump Configurations

Model	Voltage	Max Amps	Flow rate	Bar	Head	Wire Lead	Outlet Dia.	N.W./G.W.
SFSP1-L016-01	12 V	4.5 A	16 LPM	0.6 bar	6 m/19.7'	1 m/3'	12 mm / 1/2"	0.24 / 0.26 kg

WATER PRESSURE SYSTEMS



Pressurized Accumulator Tanks



water inlet with water pressure regulator




Accumulator Pressure Boost System



33 Series Fresh water pump



42 Series Fresh water pump

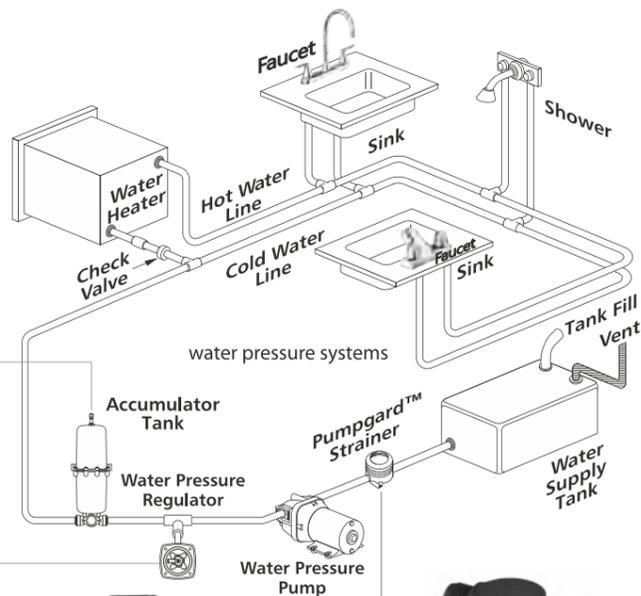

water pressure systems



51S01 Filter - 1/2" -14 MNPT



52S02 Filter - 1/2" -14 MNPT

SEAFLO is a leading manufacturer of plumbing products for Marine, RV, Agricultural, Industrial, Construction and OEM Applications. Our Fresh Water Pumps are of uncompromised quality, with proven reliability, and a vast variety of options. Our Diaphragm Pumps are available in DC and AC currents, in flows from 0.7 GPM up to 7.0 GPM which can serve 2 to 5 3/8" (10 mm) or 1/2" (13 mm) outlets. This automatic demand water system pump has a built-in pressure switch, which automatically starts and stops when the faucet is opened and closed. Our tough design provides performance that you can rely on for years. Quality fresh water pumps you can trust with and 2 year warranty.

Features & Benefits

- Positive displacement pump
- Capable of supplying 2-5 fixtures
- Internal bypass technology reduces cycling (22/42/43/51 series)
- Can run dry
- Quiet operation
- Demand pump
- Low amp draw
- Open flow from 1.0 gpm/3.8lpm to 7.0 gpm/26.5 lpm
- Pressure from 17 psi/1.2 bar to 70 psi/4.8 bar
- Self priming up to 6 feet/1.8 m
- Industry standard mount pattern
- Completely rubber & iron mounting-base
- Adjustable pressure switch
- Easy connect fittings and strainers
- Marine grade blocked wiring



Industry Carton

Color Box

Standard Accessories
23F001*2 (5/8" X 3/8")


23A Series Water Pump

FEATURES & BENEFITS


- Open flow up to 1.5gpm/5.6lpm
- Dry run capability
- Max Self-priming up to 5 feet/1.5m
- Waterproof grade IP54 with extra cover
- On-demand long life pressure switch
- Configurable reflux function
- Adapt to a variety of scenarios
- Multiple connector options
- By pass technology reduces cycling
- Ignition protected, CE, RoHS

PUMP

- Max Recommended Temperature 140 °F (60 °C) Max.
- Priming Capabilities
2 feet (0.6m) suction lift for 0.5 and 0.7gpm
5 feet (1.5m) suction lift for 1, 1.2 and 1.5gpm
- Inlet/Outlet Ports
5/8" quick connector
- Weight
1.54 lbs (0.7 kg)

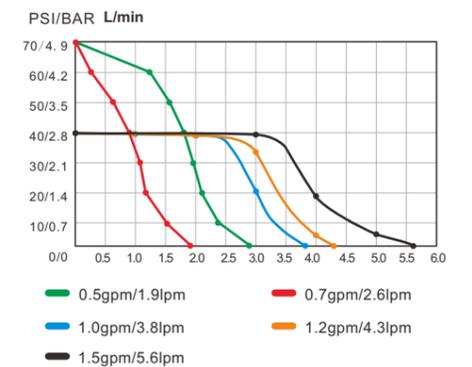

Optional Accessories

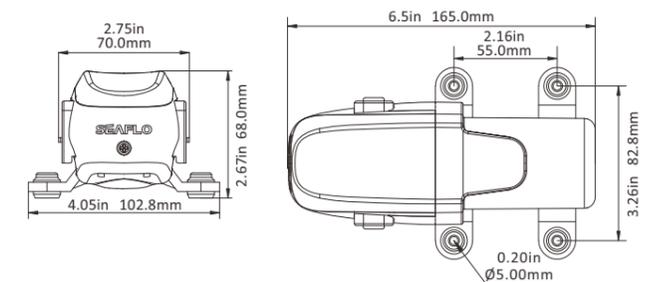

Standard Pump Configurations

Model	Voltage	GPM/LPM	Control Type	Amps	PSI/BAR	Valves	Diaphragm	Ports
SFDP1-010-040-23A	12V	1.0/3.8	Switch & By pass	3.8Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-010-040-23A	24V	1.0/3.8	Switch & By pass	2.0Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP1-012-040-23A	12V	1.2/4.5	Switch & By pass	4.2Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-012-040-23A	24V	1.2/4.5	Switch & By pass	2.2Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP1-015-040-23A	12V	1.5/5.6	Switch & By pass	4.5Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-015-040-23A	24V	1.5/5.6	Switch & By pass	2.5Max	40/2.8	EPDM	Santoprene	5/8" quick attach

Inquire about other configurations, or valve and diaphragm materials



Color Box
Industry Carton
Standard Accessories
23F001*2 (5/8" X 3/8")

NEW

The power adapter
Input voltage: AC100V~240V
Output voltage: 12V 3.A



23B Series Water Pump

FEATURES & BENEFITS

- Open flow up to 1.5gpm/5.6lpm
- Dry run capability
- Max Self-priming up to 5 feet/1.5m
- Waterproof grade IP54 with extra cover
- On-demand long life pressure switch
- Configurable reflux function
- Adapt to a variety of scenarios
- Multiple connector options
- By pass technology reduces cycling
- Extra button for easy control
- Ignition protected, CE, UKCA, RoHS

PUMP



- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
5 feet (1.5m) suction lift
- Inlet/Outlet Ports**
5/8" quick connector
- Weight**
1.54 lbs (0.7 kg)

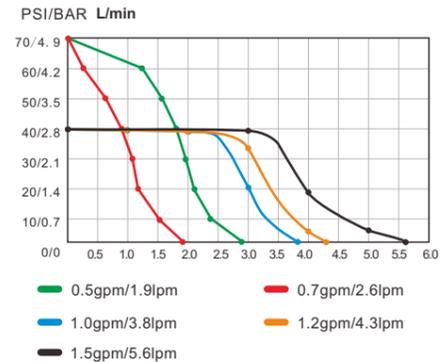

Can match multiple 1/4" quick attach fittings to meet different requirements.



Optional Accessories

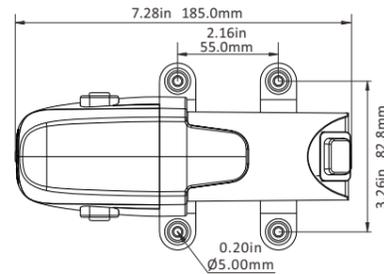

Standard Pump Configurations

Model	Voltage	GPM/LPM	Control Type	Amps(A)	PSI/BAR	Valves	Diaphragm	Ports
SFDPAX-005-070-23B	100V-240V	0.5 / 1.89	Switch & By pass	1.8Max	70/4.8	EPDM	Santoprene	5/8" quick attach
SFDPAX-007-070-23B	100V-240V	0.7 / 2.65	Switch & By pass	2.2Max	70/4.8	EPDM	Santoprene	5/8" quick attach
SFDPAX-010-040-23B	100V-240V	1.0 / 3.8	Switch & By pass	2.5Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDPAX-012-040-23B	100V-240V	1.2 / 4.5	Switch & By pass	2.8Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDPAX-015-040-23B	100V-240V	1.5 / 5.6	Switch & By pass	3.0Max	40/2.8	EPDM	Santoprene	5/8" quick attach

Inquire about other configurations, or valve and diaphragm materials



Color Box
Industry Carton
Standard Accessories
23F001*2 (5/8" X 3/8")

NEW




23C Series Water Pump

FEATURES & BENEFITS

- Continuous duty
- Can run dry
- Self-Priming
- Quiet operation
- Long Life Pressure Switch
- Multiple ports available
- On-demand pressure switch
- Adjustable pressure setting
- Capable of supplying 1-2 fixtures
- By pass technology reduces cycling

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
2.4 feet (0.8m) suction lift
- Inlet/Outlet Ports**
5/8" hose barb
(Custom O-Ring Outlets available)
- Weight**
1.54 lbs (0.7 kg)

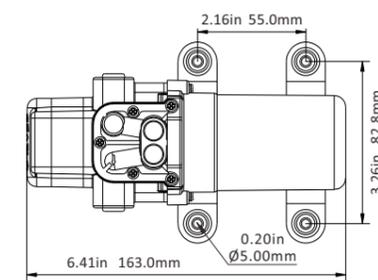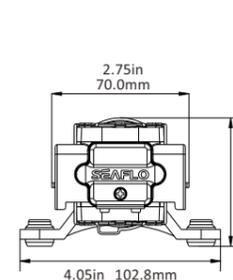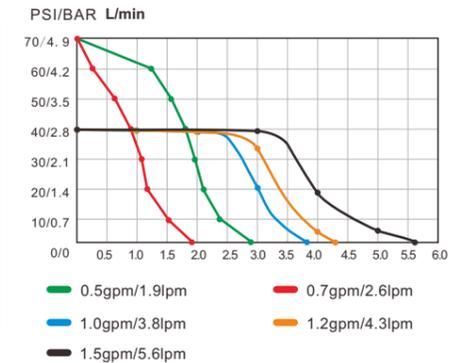

Can match multiple 1/4" quick attach fittings to meet different requirements.



Optional Accessories



Standard Pump Configurations

Model	Voltage	GPM/LPM	Control Type	Amps(A)	PSI/BAR	Valves	Diaphragm	Ports
SFDP1-010-040-23C	12V	1.0/3.8	Switch & By pass	3.8Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-010-040-23C	24V	1.0/3.8	Switch & By pass	2.0Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP1-012-040-23C	12V	1.2/4.5	Switch & By pass	4.2Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-012-040-23C	24V	1.2/4.5	Switch & By pass	2.2Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP1-015-040-23C	12V	1.5/5.6	Switch & By pass	4.5Max	40/2.8	EPDM	Santoprene	5/8" quick attach
SFDP2-015-040-23C	24V	1.5/5.6	Switch & By pass	2.5Max	40/2.8	EPDM	Santoprene	5/8" quick attach

Inquire about other configurations, or valve and diaphragm materials



21 Series Water Pump



FEATURES & BENEFITS

- Capable of supplying 1-2 fixtures
- Compact design
- On- demand pressure switch
- Adjustable pressure setting
- Can run dry
- Quiet operation
- Industry standard mounting pattern
- 18 AWG, 13" (33 cm) long Leads


PUMP

- Max Recommended Temperature**
110 °F (43 °C) Max.
- Priming Capabilities**
4 feet (1.2 m) suction lift
- Inlet/Outlet Ports**
3/8" hose barb
(Custom O-Ring Outlets available)
- Weight**
1.25 lbs (0.57 kg)

PERFORMANCE

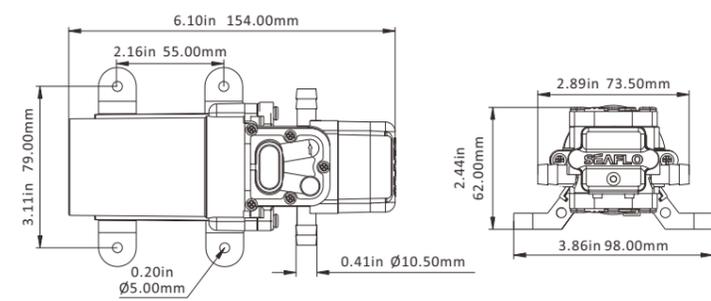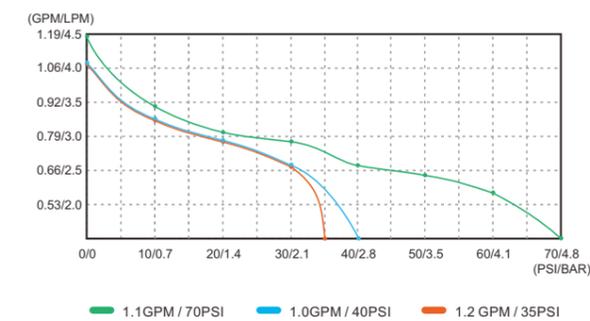

Standard Borrd Pump

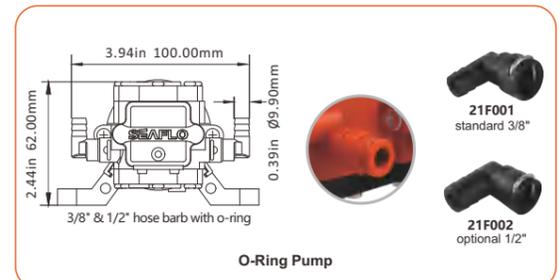

O-Ring Pump

Standard Pump Configurations

Model	Voltage	GPM/LPM	Control Type	Amps	PSI/BAR	Valves	Diaphragm	Ports
SFDP1-010-040-21	12 V	1.0/3.8	Switch	4.0 MAX	40/2.8	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP2-010-040-21	24 V	1.0/3.8	Switch	2.0 MAX	40/2.8	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP1-011-070-21	12V	1.1/4.2	Switch	4.5 MAX	70/4.8	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP1-012-035-21	12 V	1.2/4.5	Switch	4.0 MAX	35/2.4	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP2-012-035-21	24V	1.2/4.5	Switch	2.5 MAX	35/2.4	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)

Inquire about other configurations, or valve and diaphragm materials

22 Series Water Pump



FEATURES & BENEFITS

- Continuous Duty
- Capable of supplying 1-2 fixtures
- By-pass technology reduces cycling
- On- demand pressure switch
- Adjustable pressure setting
- Capable of up to 100 PSI
- Can run dry
- Quiet operation
- 18 AWG, 9.5" (24 cm) long Leads


PUMP

- Max Recommended Temperature**
110 °F (43 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
3/8" hose barb
(Custom O-Ring Outlets available)
- Weight**
2.6 lbs (1.18 kg)

PERFORMANCE

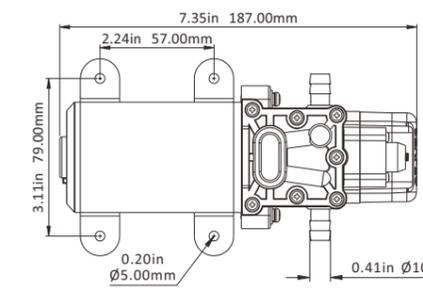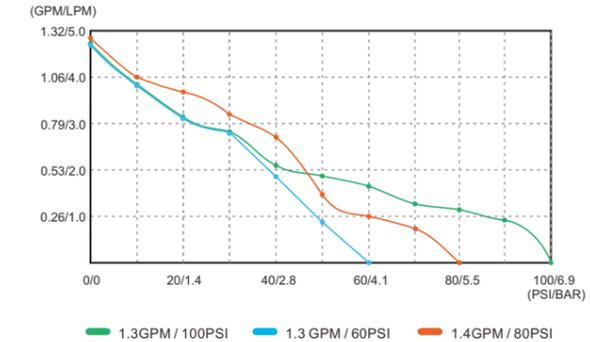

Standard Borrd Pump

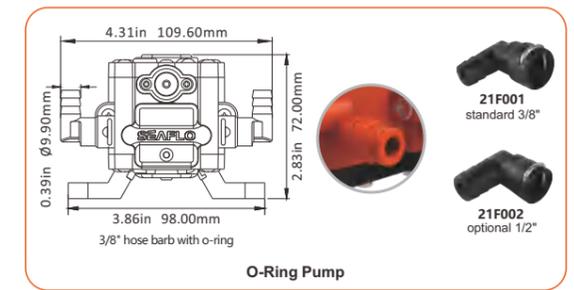

O-Ring Pump

Standard Pump Configurations

Model	Voltage	GPM/LPM	Control Type	Amps	PSI/BAR	Valves	Diaphragm	Ports
SFDP1-013-060-22	12 V	1.3/5.0	Switch & By pass	5.0 MAX	60/4.1	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP2-013-060-22	24 V	1.3/5.0	Switch & By pass	2.5 MAX	60/4.1	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP1-013-100-22	12 V	1.3/5.0	Switch & By pass	6.0 MAX	100/6.9	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP2-013-100-22	24 V	1.3/5.0	Switch & By pass	3.0 MAX	100/6.9	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)
SFDP1-014-080-22	12 V	1.4/5.3	Switch & By pass	5.5 MAX	80/5.5	EPDM	Santoprene	3/8" Barb (or Custom O-Ring)

Inquire about other configurations, or valve and diaphragm materials



33-AC Pump



Industry Carton



43-AC Pump



Industry Carton



33 Series Water Pump



FEATURES & BENEFITS

- Capable of supplying 2-3 fixtures
- Up to 3.0 GPM
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Completely rubber mounting-base
- Adjustable pressure switch
- 16 AWG, 4.5"(11.4 cm) long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2"-14 MNPT
- Weight**
3.97 lbs (1.80 kg)

PERFORMANCE

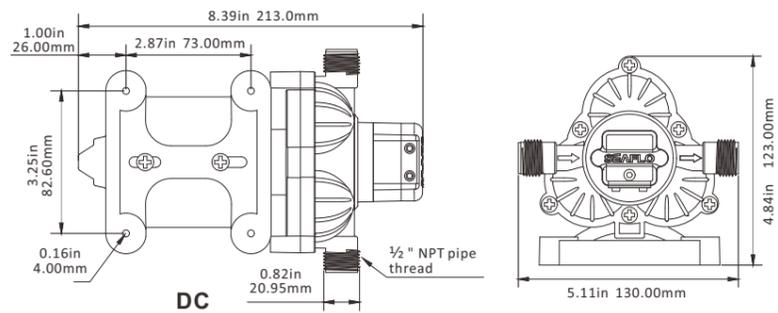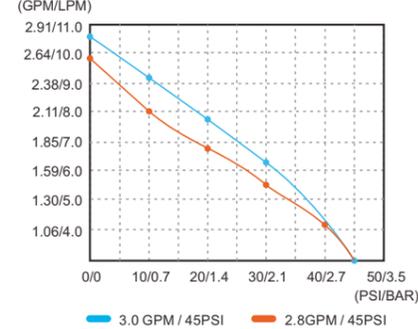

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-028-045-33	12 V	Switch	2.8/10.6	45/3.1	7.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-028-045-33	24 V	Switch	2.8/10.6	45/3.1	4.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-030-045-33	12 V	Switch	3.0/11.3	45/3.1	8.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-030-045-33	24 V	Switch	3.0/11.3	45/3.1	4.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDPA1-030-045-33	115 V	Demand	3.0/11.3	45/3.1	1.6	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug
SFDPA2-030-045-33	220 V	Demand	3.0/11.3	45/3.1	0.8	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug

43 Series Water Pump



FEATURES & BENEFITS

- Up to 3.0 GPM
- Quick-Connect fittings
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Completely rubber mounting-base Internal bypass technology reduces cycling
- 16 AWG, 9.4"(23.8 cm) long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
Quick Attach
- Weight**
4.1 lbs (1.90 kg)

PERFORMANCE

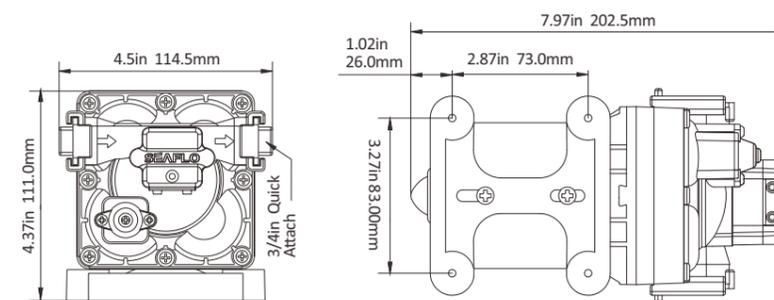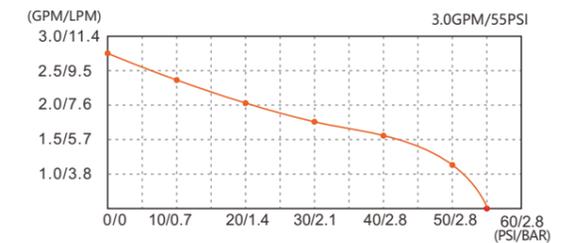

Standard Accessories




Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-030-055-43	12 V	Switch & By pass	3.0/11.3	55/3.8	7.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-030-055-43	24 V	Switch & By pass	3.0/11.3	55/3.8	4.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDPA1-030-055-43	115 V	Switch & By pass	3.0/11.3	55/3.8	1.1	EPDM	Santoprene	Quick Attach	Leads/Plug
SFDPA2-030-055-43	220 V	Switch & By pass	3.0/11.3	55/3.8	0.5	EPDM	Santoprene	Quick Attach	Leads/Plug



41short-AC Pump



Industry Carton



41long-AC Pump



Industry Carton



41 Series (short) Water Pump




FEATURES & BENEFITS

- Up to 3.3 GPM
- Can supply up to 3 fixtures
- Quick-Connect fittings
- Self priming
- Run dry safe
- On-demand use
- Industry Standard mounting pattern
- Rubber mounting-feet
- Can be used for Fresh & Salt Water
- 16 AWG, 4.5" (11.4 cm) long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
Quick Attach
- Weight**
4.0 lbs (1.80 kg)

PERFORMANCE

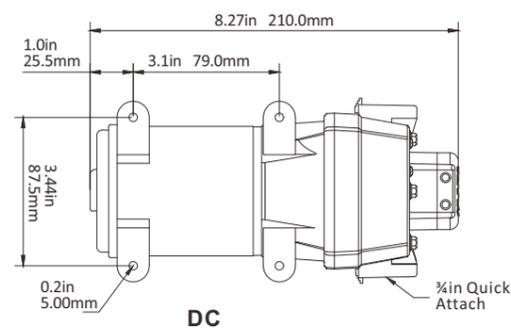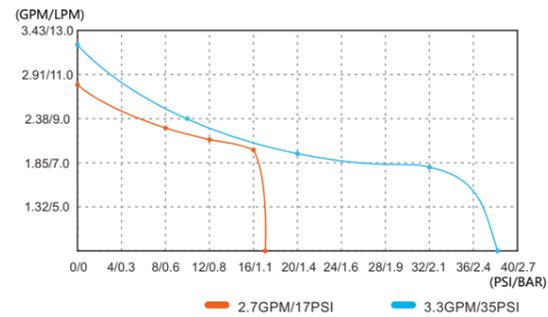

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-027-017-41	12 V	Switch & By pass	2.7/10.2	17/1.2	4.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-027-017-41	24 V	Switch & By pass	2.7/10.2	17/1.2	2.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-033-035-41	12 V	Switch & By pass	3.3/12.5	35/2.4	8.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-033-035-41	24 V	Switch & By pass	3.3/12.5	35/2.4	4.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDPA1-033-035-41	115 V	Demand & By pass	3.3/12.5	35/2.4	1.2	Viton	Santoprene	Quick Attach	Leads/Plug
SFDPA2-033-035-41	220 V	Demand & By pass	3.3/12.5	35/2.4	0.5	Viton	Santoprene	Quick Attach	Leads/Plug

41 Series (long) Water Pump




FEATURES & BENEFITS

- Up to 4.5 GPM
- Can supply up to 4 fixtures
- Quick-Connect fittings
- Self priming
- Run dry safe
- On-demand use
- Industry Standard mounting pattern
- Rubber mounting-feet
- Can be used for Fresh & Salt Water
- Adjustable pressure switch
- 16 AWG, 4.5" (11.4 cm) long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
Quick Attach
- Weight**
5.0 lbs (2.30 kg)

PERFORMANCE

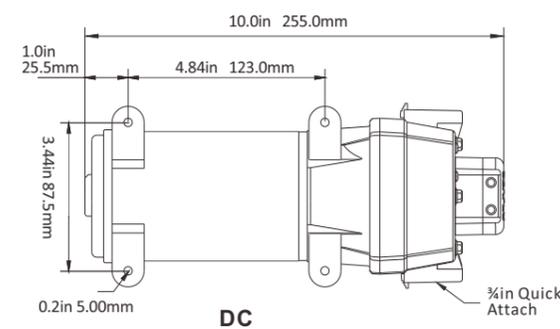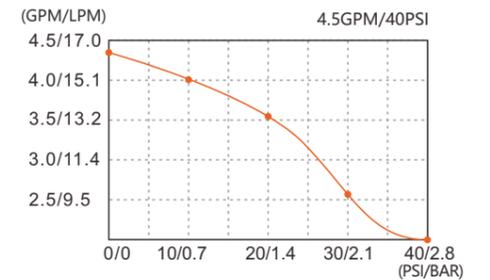

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-045-040-41	12 V	Switch & By pass	4.5/17.0	40/2.8	16.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-045-040-41	24 V	Switch & By pass	4.5/17.0	40/2.8	8.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDPA1-045-040-41	115 V	Demand & By pass	4.5/17.0	40/2.8	1.7	EPDM	Santoprene	Quick Attach	Leads/Plug
SFDPA2-045-040-41	220 V	Demand & By pass	4.5/17.0	40/2.8	0.9	EPDM	Santoprene	Quick Attach	Leads/Plug



Color Box



42 short-AC Pump



Industry Carton



42 long-AC Pump



Industry Carton



Color Box



42 Series (short) Water Pump



FEATURES & BENEFITS

- Up to 3.0 GPM
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Completely rubber mounting-base
- Internal bypass technology reduces cycling
- 16 AWG, 9.4" (23.8 cm) long with

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2"-14 MNPT
- Weight**
4.1 lbs (1.90 kg)

PERFORMANCE

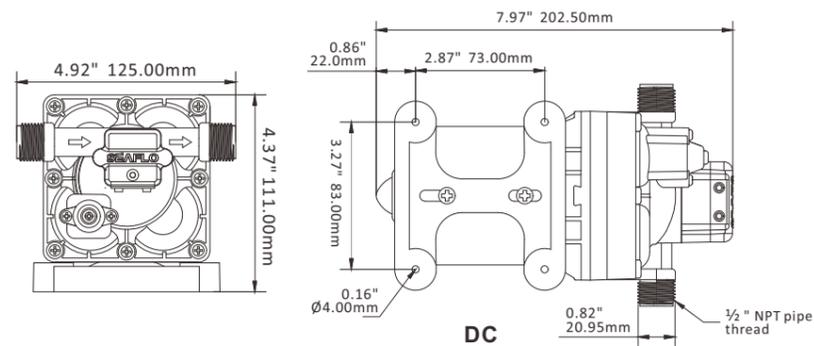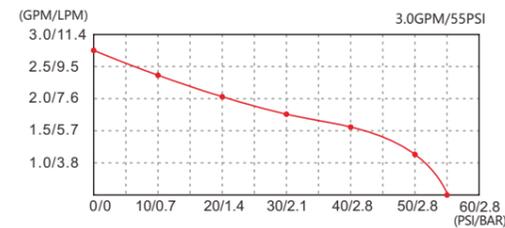

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-030-055-42	12 V	Switch & By pass	3.0/11.3	55/3.8	7.5	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-030-055-42	24 V	Switch & By pass	3.0/11.3	55/3.8	4.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDPA1-030-055-42	115 V	Switch & By pass	3.0/11.3	55/3.8	1.1	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug
SFDPA2-030-055-42	220 V	Switch & By pass	3.0/11.3	55/3.8	0.5	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug

42 Series (long) Water Pump



FEATURES & BENEFITS

- Up to 5.0 GPM
- Self priming
- Run dry safe
- Quiet operation
- On-demand use
- Industry Standard mounting pattern
- Completely rubber mounting-base
- Internal bypass technology reduces cycling
- 14 AWG, 9.4" (23.8 cm) long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2" MNPT
- Weight**
5.95 lbs (2.7 kg)

PERFORMANCE

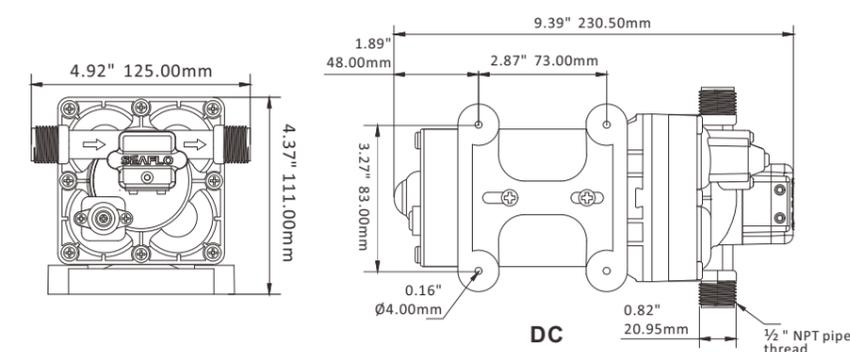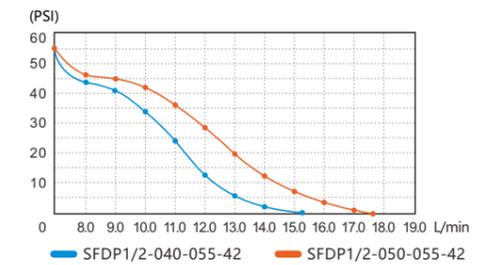

Standard Accessories




Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-040-055-42	12 V	Switch & By pass	4.0/15.1	55/3.8	14.00	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-040-055-42	24 V	Switch & By pass	4.0/15.1	55/3.8	7.00	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP1-050-055-42	12 V	Switch & By pass	5.0/18.9	55/3.8	15.00	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDP2-050-055-42	24 V	Switch & By pass	5.0/18.9	55/3.8	7.50	EPDM	Santoprene	1/2" MNPT	2-Pin/Leads
SFDPA1-040-055-42	115V	Switch & By pass	4.0/15.1	55/3.8	1.80	EPDM	Santoprene	1/2" MNPT	Leads/Plug
SFDPA2-040-055-42	220V	Switch & By pass	4.0/15.1	55/3.8	0.85	EPDM	Santoprene	1/2" MNPT	Leads/Plug



51 NEW-AC Pump



Industry Carton



Industry Carton





51 New Series Water Pump

FEATURES & BENEFITS

- Precise pressure control and stable performance
- Good sealing performance, waterproof and dustproof
- Low starting pressure, reduces cycling
- Good heat dissipation
- Longer pump life
- Can supply up to 4 fixtures
- Run dry capable for normal workloads
- Very quiet operation
- On-demand only
- Fresh water or salt water available
- 16 AWG, 9" (22.8 cm) long leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2" MNPT
- Weight**
5.9 lbs (2.68 kg)

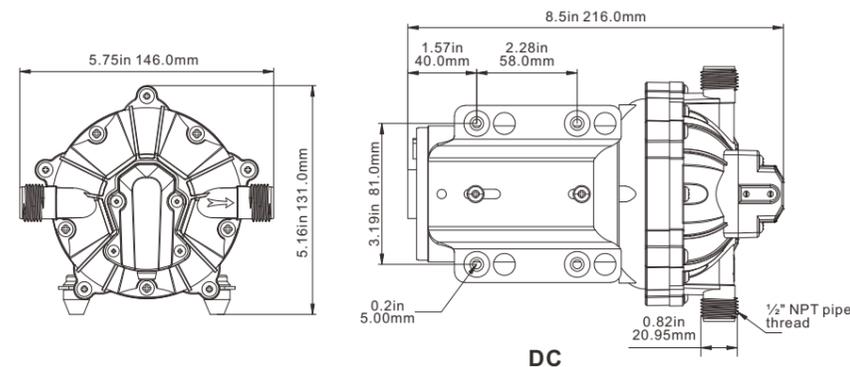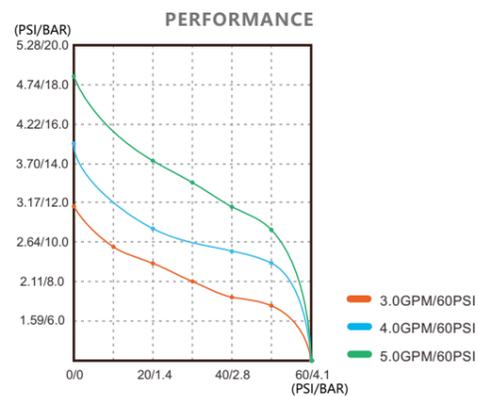

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-040-060-51 NEW	12 V	Switch	4.0/15.1	60/4.2	14.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-040-060-51 NEW	24 V	Switch	4.0/15.1	60/4.2	7.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-050-060-51 NEW	12 V	Switch	5.0/18.9	60/4.2	17.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-050-060-51 NEW	24 V	Switch	5.0/18.9	60/4.2	8.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-050-060-51 NEW	115V	Switch	5.0/18.9	60/4.2	2.56	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug
SFDP2-050-060-51 NEW	220V	Switch	5.0/18.9	60/4.2	1.28	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug



52A Series Water Pump

FEATURES & BENEFITS

- Up to 5.0 GPM
- Continuous Duty
- Can supply up to 4 fixtures
- Quick connect fittings
- Very quiet operation
- Self priming
- Run dry safe
- On-demand use
- Industry Standard mounting pattern
- Can be used for Fresh & Salt Water
- Heavy-Duty Motor
- 16 AWG, 9" (22.8 cm) long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
Quick Attach
- Weight**
5.95 lbs (2.7 kg)

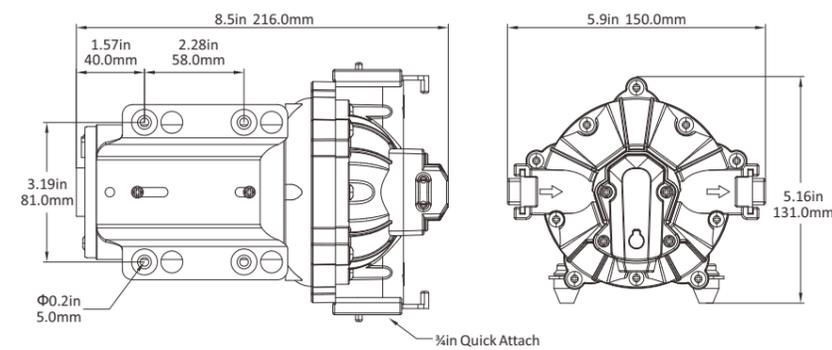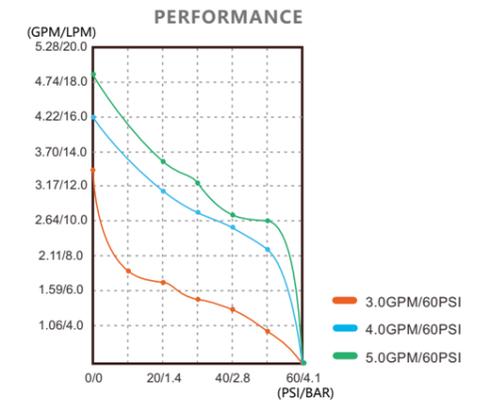

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-040-060-52A	12 V	Switch	4.0/15.1	60/4.2	13.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-040-060-52A	24 V	Switch	4.0/15.1	60/4.2	7.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-050-060-52A	12 V	Switch	5.0/18.9	60/4.2	17.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-050-060-52A	24 V	Switch	5.0/18.9	60/4.2	9.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-050-070-52A	12 V	Switch	5.0/18.9	70/4.8	18.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-050-070-52A	24 V	Switch	5.0/18.9	70/4.8	10.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads



Color Box

Industry Carton



55-AC Pump



Industry Carton



Color Box



53 Series Water Pump




FEATURES & BENEFITS

- Up to 7.0 GPM
- Continuous Duty
- Can supply up to 6 fixtures
- Heavy-Duty Motor
- Quick connect fittings
- Self priming
- Run dry safe
- On-demand use
- Can be used for Fresh & Salt Water
- Adjustable pressure switch
- 16 AWG, 9" (22.8 cm) long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
Quick Attach
- Weight**
9.5 lbs (4.31 kg)

PERFORMANCE

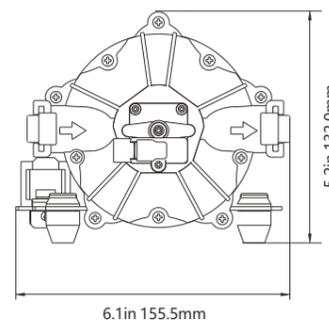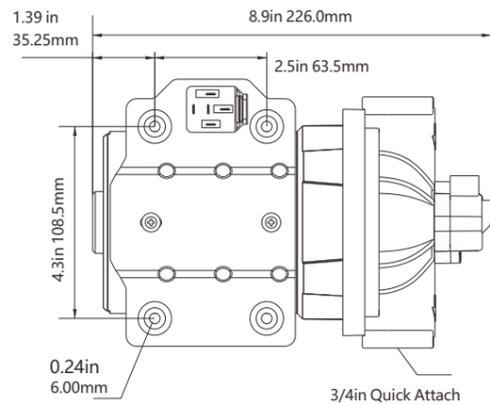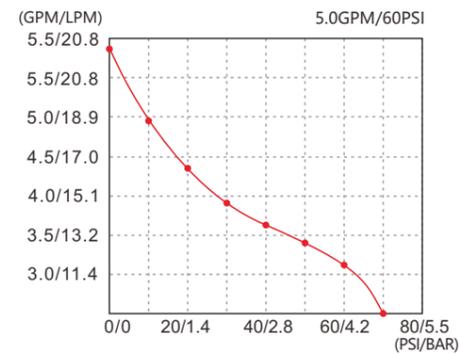

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-070-060-53	12 V	Switch	7.0/26.5	60/4.2	24.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-070-060-53	24 V	Switch	7.0/26.5	60/4.2	13.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads

55 Series Water Pump With Bypass



FEATURES & BENEFITS

- Precise pressure control and stable performance
- Good sealing performance, waterproof and dustproof
- Low starting pressure, reduces cycling
- Good heat dissipation
- Longer pump life
- Can supply up to 4 fixtures
- Run dry capable for normal workloads
- Very quiet operation
- On-demand combine with by-pass
- Fresh water or salt water available
- 16 AWG, 9" (22.8 cm) long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2" MNPT
- Weight**
5.9 lbs (2.68 kg)

PERFORMANCE

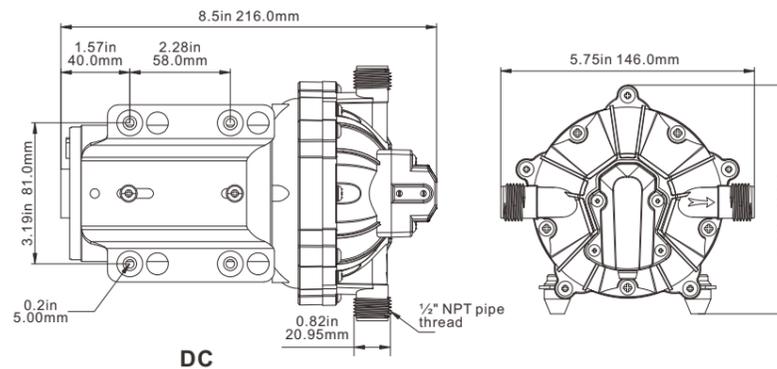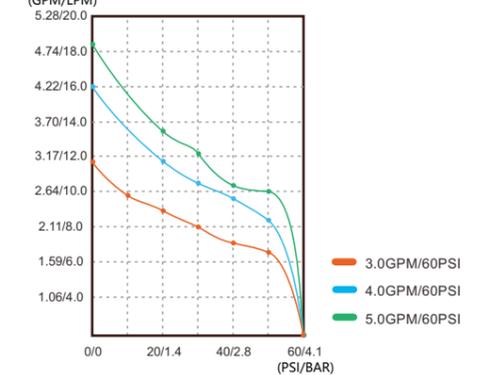

Standard Accessories



Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-040-060-55	12 V	Switch & By Pass	4.0/15.0	60/4.2	14.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-040-060-55	24 V	Switch & By Pass	4.0/15.0	60/4.2	7.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP1-050-060-55	12 V	Switch & By Pass	5.0/18.9	60/4.2	17.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDP2-050-060-55	24 V	Switch & By Pass	5.0/18.9	60/4.2	8.0	EPDM	Santoprene	1/2"-14 MNPT	2-Pin/Leads
SFDPA1-050-060-55	115V	Switch & By Pass	5.0/18.9	60/4.2	2.56	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug
SFDPA2-050-060-55	220V	Switch & By Pass	5.0/18.9	60/4.2	1.28	EPDM	Santoprene	1/2"-14 MNPT	Leads/Plug




56A Series Variable Speed Smart Pump

FEATURES & BENEFITS


- Variable speed technology
- Motor speed adjusts to water needs
- Capable of sustained low voltage operation
- Waterproof grade IPX5
- Run dry safe, long service life
- Strong suction, suction lift up to 1.8m
- CE, UKCA, RoHS, REACH, PAHS
- Quiet operation, bypass technology reduces cycling
- 5-chamber diaphragm pump operates more stably and smoothly

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
Quick Attach
- Weight**
6.57 lbs (2.98 kg)

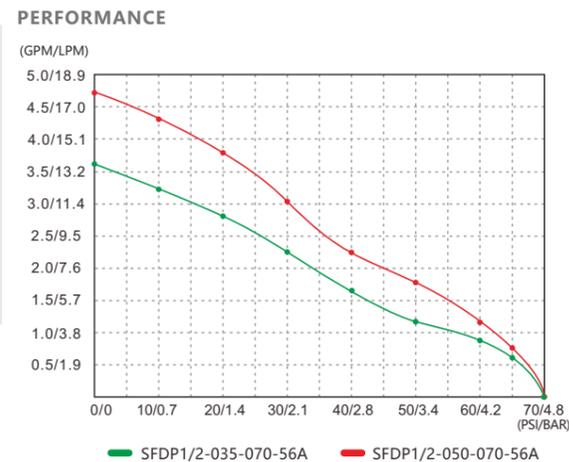

Standard Accessories

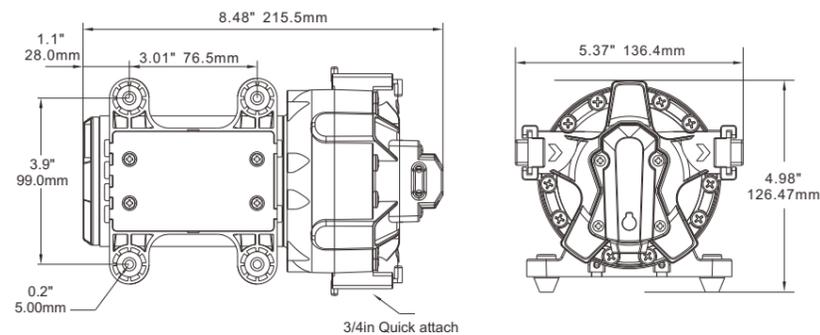

Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-035-070-56A	12 V	Variable Speed	3.5/13.2	70/4.8	7.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-035-070-56A	24 V	Variable Speed	3.5/13.2	70/4.8	4.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP1-050-070-56A	12 V	Variable Speed	5.0/18.9	70/4.8	10.0	EPDM	Santoprene	Quick Attach	2-Pin/Leads
SFDP2-050-070-56A	24 V	Variable Speed	5.0/18.9	70/4.8	5.5	EPDM	Santoprene	Quick Attach	2-Pin/Leads


56C Series Variable Speed Smart Pump

FEATURES & BENEFITS


- Variable speed technology
- Motor speed adjusts to water needs
- Capable of sustained low voltage operation
- Waterproof grade IPX5
- Run dry safe, long service life
- Strong suction, suction lift up to 1.8m
- CE, UKCA, RoHS, REACH, PAHS
- Quiet operation, bypass technology reduces cycling
- 5-chamber diaphragm pump operates more stably and smoothly

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2\"/>

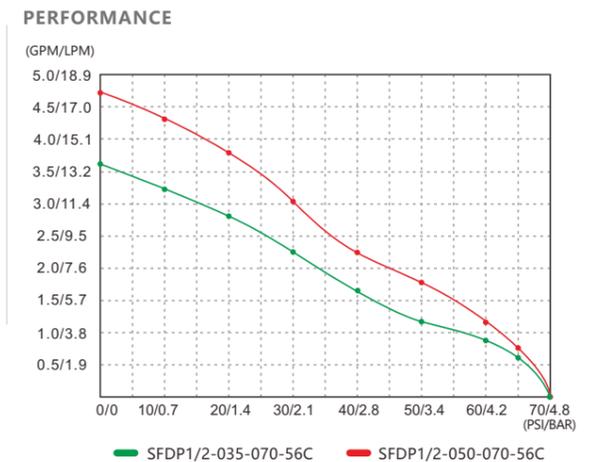

Standard Accessories

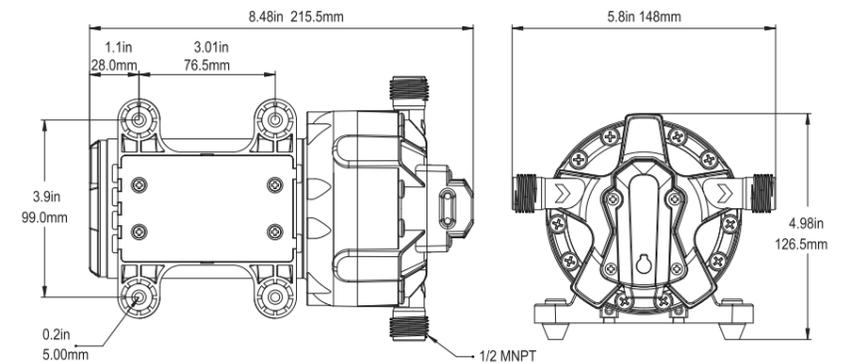

Standard Pump Configurations

Model	Voltage	Control Type	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFDP1-035-070-56C	12 V	Variable Speed	3.5/13.2	70/4.8	7.5	EPDM	Santoprene	1/2\"/>	
SFDP2-035-070-56C	24 V	Variable Speed	3.5/13.2	70/4.8	4.0	EPDM	Santoprene	1/2\"/>	
SFDP1-050-070-56C	12 V	Variable Speed	5.0/18.9	70/4.8	10.0	EPDM	Santoprene	1/2\"/>	
SFDP2-050-070-56C	24 V	Variable Speed	5.0/18.9	70/4.8	5.5	EPDM	Santoprene	1/2\"/>	

42 Series Washdown Pump Kit

FEATURES & BENEFITS


Self-priming up to 1.83 m/6 feet
Spray gun range 10 m/32.81 feet
Dry run capability
Intermittent duty
UV-protected hose-pipe, 6.5 m/20 feet
Anticorrosive stoving varnish coated motor
The best choice for cleaning boats, fish boxes, anchor wells, dinghies, and other similar applications

PUMP

Liquid temperature
140 °F (60 °C)Max.
Priming Capabilities
6 feet (1.8 m)suction lift
Max Pressure
55PSI (3.8 BAR)
Weight
7.02 lbs (3.2 kg)

INCLUDES:

- (1) 4.0 GPM Heavy-Duty Washdown Pump
- (2) Trigger Spray Nozzle w/ Quick Connect
- (3) 20' Coiled Hose (UV Protected, 1/2")**(A model only)**
- (4) Quick Hose Disconnect Fitting
- (5) 50 Mesh Inlet Strainer
- (6) 1/2" Barbed Fittings

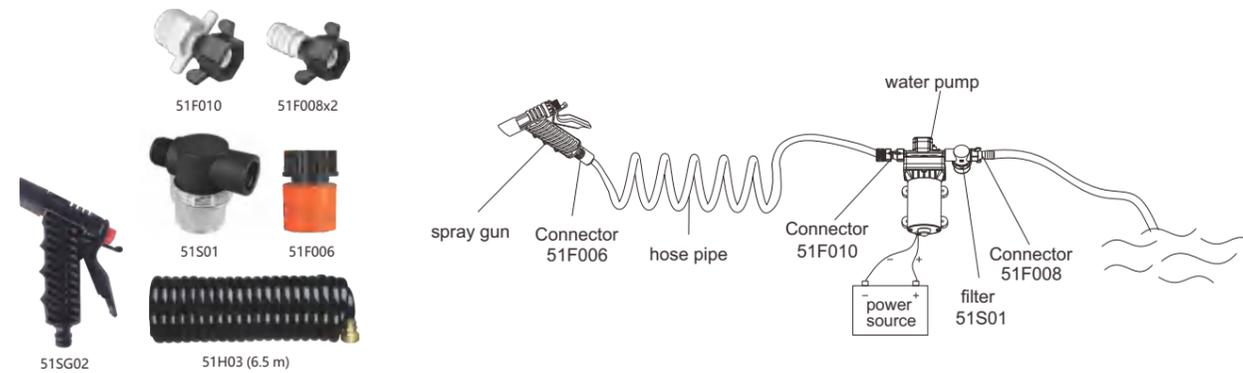

Standard Pump Configurations

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Coiled Hose	Ports	Wire Connections
SFWP1-040-055-42A	12 V	4.0 / 15.1	Demand & By pass	14.0	55 / 3.8	Yes	1/2"-14MNPT	2-Pin/Leads
SFWP2-040-055-42A	24 V	4.0 / 15.1	Demand & By pass	7.0	55 / 3.8	Yes	1/2"-14MNPT	2-Pin/Leads



Standard Pump Configurations

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Coiled Hose	Ports	Wire Connections
SFWP1-040-055-42B	12 V	4.0 / 15.1	Demand & By pass	14.0	55 / 3.8	No	1/2"-14MNPT	2-Pin/Leads
SFWP2-040-055-42B	24 V	4.0 / 15.1	Demand & By pass	7.0	55 / 3.8	No	1/2"-14MNPT	2-Pin/Leads

51 Series Washdown Pump Kit

FEATURES & BENEFITS


Self-priming up to 1.83 m/6 feet
Spray gun range 10 m/32.81 feet
Dry run capability
Intermittent duty
UV-protected hose-pipe, 6.5 m/20 feet
Anticorrosive stoving varnish coated motor
The best choice for cleaning boats, fish boxes, anchor wells, dinghies, and other similar applications

PUMP

Liquid temperature
140 °F (60 °C) Max.
Priming Capabilities
6 feet (1.8 m) suction lift
Max Pressure
70PSI (4.8 BAR)
Weight
7.67 lbs (3.5 kg)

INCLUDES:

- (1) 3/5 GPM Heavy-Duty Washdown Pump
- (2) Trigger Spray Nozzle w/ Quick Connect
- (3) 20' Coiled Hose (UV Protected, 1/2")**(A model only)**
- (4) Quick Hose Disconnect Fitting
- (5) 50 Mesh Inlet Strainer
- (6) 1/2" Barbed Fittings

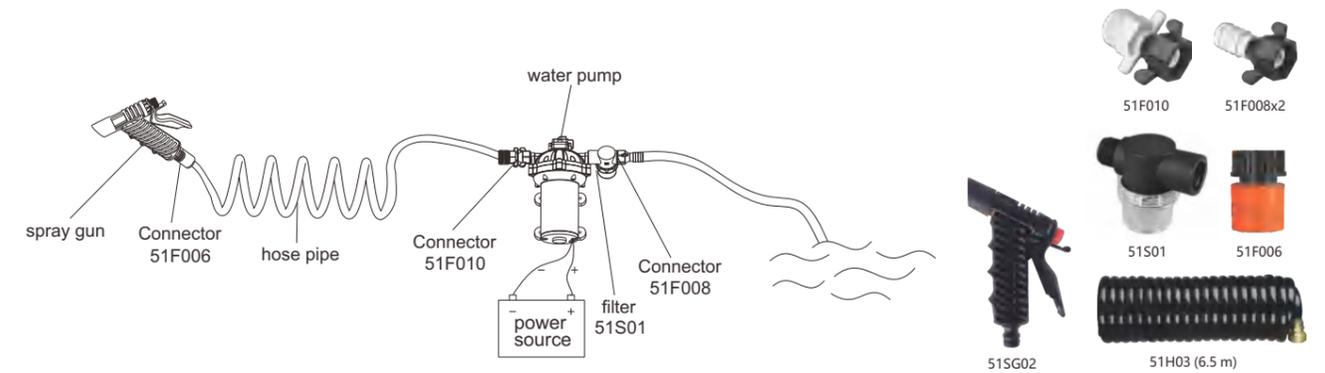

Standard Pump Configurations

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Coiled Hose	Ports	Wire Connections
SFWP1-052-070-51A NEW	12 V	5.2 / 19.7	Demand	18.0	70 / 4.8	Yes	1/2"-14MNPT	2-Pin/Leads
SFWP2-052-070-51A NEW	24 V	5.2 / 19.7	Demand	9.5	70 / 4.8	Yes	1/2"-14MNPT	2-Pin/Leads



Standard Pump Configurations

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Coiled Hose	Ports	Wire Connections
SFWP1-052-070-51B NEW	12 V	5.2 / 19.7	Demand	18.0	70 / 4.8	No	1/2"-14MNPT	2-Pin/Leads
SFWP2-052-070-51B NEW	24 V	5.2 / 19.7	Demand	9.5	70 / 4.8	No	1/2"-14MNPT	2-Pin/Leads



Color Box



Color Box



33 Series Washdown Pump Kit With 20' Coiled Hose

FEATURES & BENEFITS

- Positive displacement pump
- Can run dry
- Quiet operation
- Demand pump
- Easy connect fittings
- Ignition protected
- Industry standard mount pattern

PUMP

- Liquid temperature 140 °F (60 °C) Max.
- Priming Capabilities 6 feet (1.8 m) suction lift
- Inlet/Outlet Ports 1/2" -14MNPT
- Weight 6.74 lbs (3.06 kg) -33 series

INCLUDES:

- (1) 3.0/5.0 GPM Heavy-Duty Washdown Pump
- (2) Trigger Spray Nozzle w/ Quick Connect
- (3) 20' Coiled Hose (UV Protected, 1/2")
- (4) Quick Hose Disconnect Fitting
- (5) 50 Mesh Inlet Strainer
- (6) 1/2" Barbed Fittings

51 Series Washdown Pump Kit With 20' Coiled Hose

FEATURES & BENEFITS

- Positive displacement pump
- Can run dry
- Quiet operation
- Demand pump
- Easy connect fittings
- Ignition protected
- Industry standard mount pattern

PUMP

- Liquid temperature 140 °F (60 °C) Max.
- Priming Capabilities 6 feet (1.8 m) suction lift
- Inlet/Outlet Ports 1/2" -14MNPT
- Weight 8.2 lbs (3.72 kg) -51 series

INCLUDES:

- (1) 3.0/5.0 GPM Heavy-Duty Washdown Pump
- (2) Trigger Spray Nozzle w/ Quick Connect
- (3) 20' Coiled Hose (UV Protected, 1/2")
- (4) Quick Hose Disconnect Fitting
- (5) 50 Mesh Inlet Strainer
- (6) 1/2" Barbed Fittings



Blister



Blister

Standard Pump Configurations

Model	Voltage	Switch	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-030-070-33	12 V	Demand	3.0/11.3	70/4.8	11	EPDM	Santoprene	1/2" -14 MPNT	2-Pin/Leads
SFWP2-030-070-33	24 V	Demand	3.0/11.3	70/4.8	5	EPDM	Santoprene	1/2" -14 MPNT	2-Pin/Leads

Standard Pump Configurations

Model	Voltage	Switch	GPM/LPM	PSI/BAR	Max Draw(A)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-050-070-51 NEW	12 V	Demand	5.0/18.9	70/4.8	17	EPDM	Santoprene	1/2" -14 MPNT	2-Pin/Leads
SFWP2-050-070-51 NEW	24 V	Demand	5.0/18.9	70/4.8	10	EPDM	Santoprene	1/2" -14 MPNT	2-Pin/Leads
SFWP1-055-070-51 NEW	12 V	Demand	5.5/20.0	70/4.8	17	EPDM	Santoprene	1/2" -14 MPNT	2-Pin/Leads
SFWP2-055-070-51 NEW	24 V	Demand	5.5/20.0	70/4.8	10	EPDM	Santoprene	1/2" -14 MPNT	2-Pin/Leads


41 Series Portable Washdown Pump Kit

FEATURES & BENEFITS

- 6.5M UV-protected Coiled Hose Coil
- 2M Inlet Hose
- Easy to use, store, and carry on
- Adjustable sprayer
- Built-in by pass valve
- Smooth flowing
- Quiet Operation
- 16 AWG, 4.5"(11.4 cm) long Leads

PUMP

- Liquid temperature 140 °F (60 °C) Max.
- Priming Capabilities 6 feet(1.8 m) suction lift
- Max Pressure 70 PSI (4.8 BAR)
- Weight 11 lbs (5 kg)

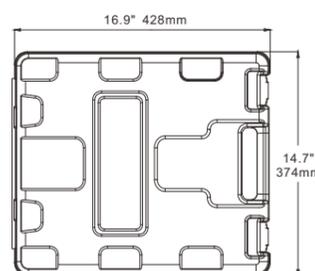

Standard Accessories



STANDARD PUMP CONFIGURATIONS

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-045-070-41	12 V	4.5 / 17.0	Demand & By pass	17.0	70 / 4.8	EPDM	Santoprene	Quick attach	2-Pin/Leads

20' Coil Hose Washdown Kit

FEATURES & BENEFITS

- Consists of UV-protected 20' (6.5 m) Coiled 1/3" I.D. Hose, spray nozzle with adjustable tip and contoured grip and bronze fittings.
- Coil hose eliminates any kinds that may arise from normal water hose.
- Designed to facilitate easy, neat, safe storage.
- Great for large cockpits, dockside installation and even home cleaning use.



Model	SFHW2-060-01		
Spray Gun	Connector:5/8"QA	Pressure:0-8 Bar	
Contoured Grip	Connector:5/8"QA *5/8"QA	Diameter: ID 1/3"	Length:20'
Adaptor	Connector:3/4"FNPT / 1/2"FNPT / 1"FNPT * 5/8" QA		

NEW



56 Series Portable Cleaning Kit



FEATURES & BENEFITS

- 1/2" NPTF connector can be directly connected to the pipe or used with a quick coupling
- Pump station integrated design, easy to use
- Advanced IPX6 rating waterproof outer box
- High-power water pump, flow up to 5.0GPM
- Automatic shut-off pressure switch
- Quiet operation, Capable of dry running
- With 17' (5.2m) UV-protected coiled hose coil and adjustable sprayer

PUMP

- Liquid temperature 140 °F (60 °C) Max.
- Priming Capabilities 5 feet (1.5 m) suction lift
- Max Pressure 70 PSI (4.8 BAR)
- Weight 11.2 lbs (5.1 kg)

Standard Accessories

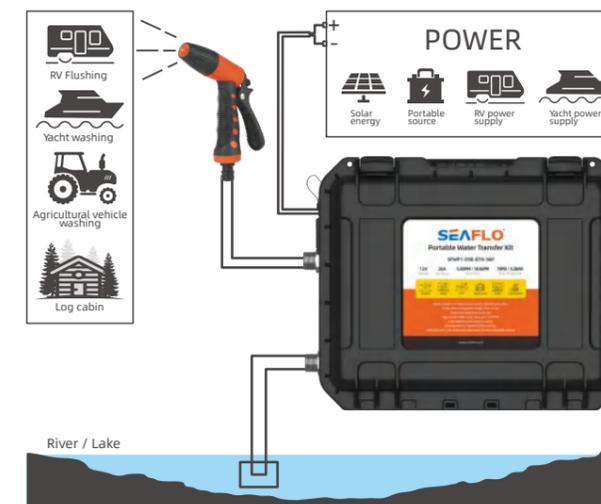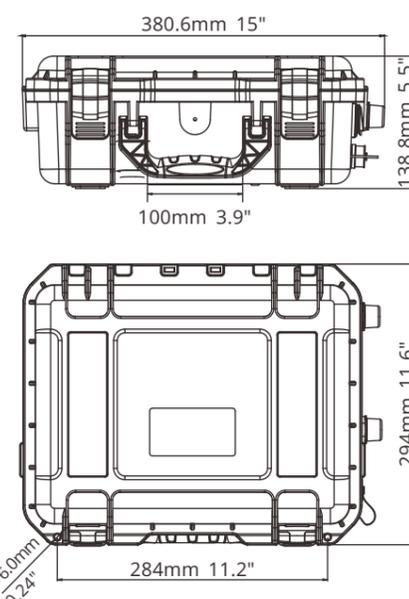

Standard Pump Configurations

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-050-070-56P	12 V	5.0 / 18.9	Demand & By pass	20.0	70 / 4.8	EPDM	Santoprene	Quick attach	Waterproof connector



56 Series Portable Water Transfer Kit



FEATURES & BENEFITS

- 1/2" NPTF can connector be directly connected to the pipe or used with a quick coupling
- Pump station integrated design, easy to use
- Advanced IPX6 rating waterproof outer box
- High-power water pump, flow up to 5.0GPM
- Automatic shut-off pressure switch
- Quiet operation, Capable of dry running

PUMP

- Liquid temperature 140 °F (60 °C) Max.
- Priming Capabilities 5 feet (1.5 m) suction lift
- Max Pressure 70 PSI (4.8 BAR)
- Weight 9.9 lbs (4.5 kg)

Standard Accessories

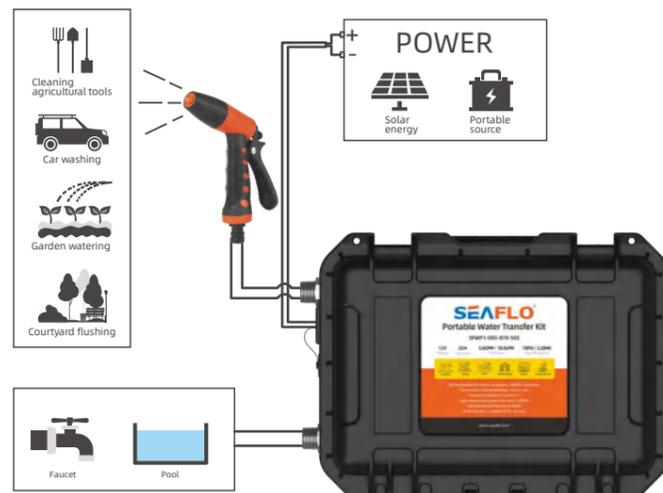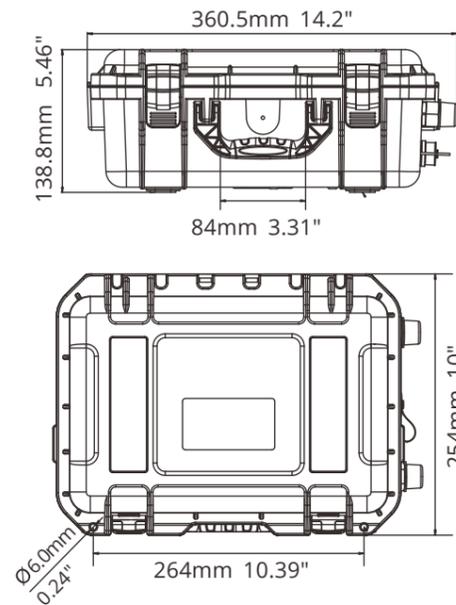

Standard Pump Configurations

Model	Voltage	Open Flow (GPM/LPM)	Control Type	Max Draw(A)	Shut-off Pressure (PSI/BAR)	Valves	Diaphragm	Ports	Wire Connections
SFWP1-050-070-565	12 V	5.0 / 18.9	Demand & By pass	20.0	70 / 4.8	EPDM	Santoprene	Quick attach	Waterproof connector

Pressurized Accumulator Tank 0.75 L / 1 L

Accumulator tanks hold a reservoir of air and water down stream from the pump. The air acts as a cushion, absorbing pump and pressure fluctuations, smoothing the flow and making the system quieter. Accumulators allow the pump to reach shut-off pressure more smoothly which reduces the on/off cycle which gives better control of hot water delivery.


FEATURES & BENEFITS

- Smoother flow, quieter water systems.
- Internal rubber membrane eliminates maintenance and allows universal mounting.
- Better control of hot water temperatures.
- Simply fitted to new or existing systems.
- Longer pump life, lower battery drain.
- Snap-in port fittings.

Standard Accessories:




Optional Accessories:

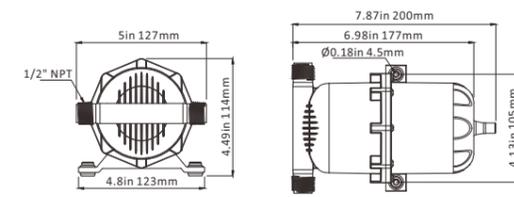

0.75 L

PRODUCT SPECIFICATIONS

Model	Internal Volume	Pre-charge Pressure	Max Operating Pressure	Air Fill Valve	Inlet/Outlet Dia	Weight	Dimensions
SFAT-100-125-01	1.0 L 33.8 OZ	10 PSI 0.7 BAR	125 PSI 8.6 BAR	standard automotive style tire valve	1/2" MNPT	660 g	12"x4.6" 300mm x 114mm

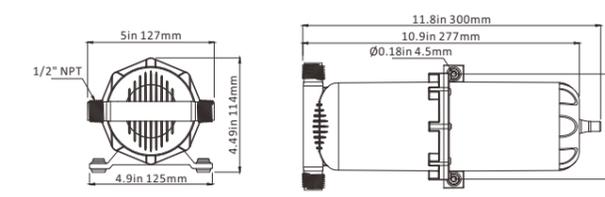

1 L


PRODUCT SPECIFICATIONS

Model	Internal Volume	Pre-charge Pressure	Max Operating Pressure	Air Fill Valve	Inlet/Outlet Dia	Weight	Dimensions
SFAT-075-125-01	0.75 L 23.5 OZ	10 PSI 0.7 BAR	125 PSI 8.6 BAR	standard automotive style tire valve	1/2" MNPT	360 g	8.1"x4.6" 205mm x 116mm

8L Water Accumulator Tank

FEATURES & BENEFITS

- Making flow more smoother
- Prolong pump's service life
- protective coating for corrosion resistance
- 3/4 "MNPT thread for convenient installation in the water system



Kraft Box

Standard Pump Configurations

Model	Tank Volume	Max. Pressure	Inlet/outlet size	Net Weight
SFAT-087-021-01	8L	87 PSI (6 Bar)	3/4" MNPT	2 KG



Color Box



Color Box



33 Series Economic Water Pressure System

3.0 GPM/11.3LPM Pump with Integrated Accumulator Tank

FEATURES & BENEFITS

- Powerful 3.0 gallons/ 11.3 litres per minute of flow
- Ultra quiet with constant and steady flow
- Superior self-priming capabilities
- Powerful enough to supply up to 3 fixtures
- Built-in adjustable pressure switch
- Easy pre-assembled installation
- Heavy-duty, corrosion resistant motor
- Capable of being run dry without damage
- Can be fitted to new or existing systems

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2" MNPT
- Weight**
7.1 lbs (3.2 kg)



42 Series Quietest Water Pressure System



3.0 GPM/11.3LPM Pump with Integrated Accumulator Tank

FEATURES & BENEFITS


- Powerful 3.0 gallons/11.3 litres per minute of flow
- Ultra quiet with constant and steady flow
- Superior self-priming capabilities
- Powerful enough to supply up to 3 fixtures
- Built-in adjustable pressure switch
- Easy pre-assembled installation
- Heavy-duty, corrosion resistant motor
- Capable of being run dry without damage
- Can be fitted to new or existing systems

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2" MNPT
- Weight**
7.28 lbs (3.3 kg)

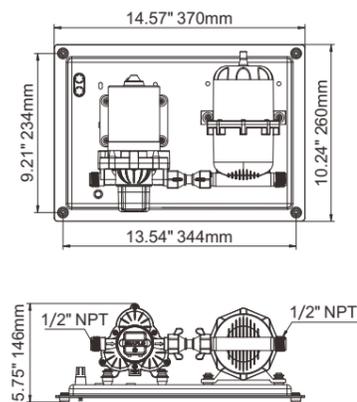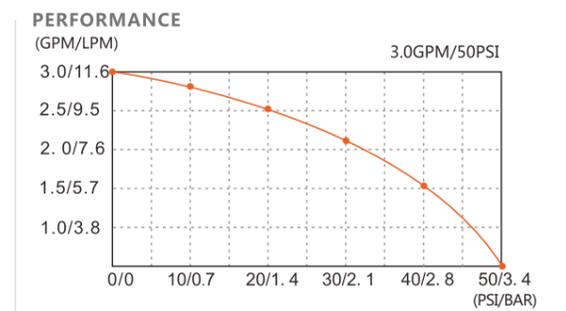


Standard Accessories:

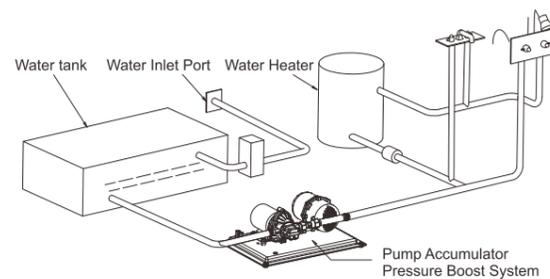


Standard Pump Configurations

Model	Tank Volume	Voltage	Control Type	GPM/LPM	Pressure On (PSI/BAR)	Pressure Off (PSI/BAR)	Max Draw(A)	Ports	Wire Connections
SFWSK1-030-045-002	0.75 L	12 V	Switch	3.0/11.3	35/2.4	45/3.1	11.0	1/2" MNPT	2-Pin/Leads
SFWSK2-030-045-002	0.75 L	24 V	Switch	3.0/11.3	35/2.4	45/3.1	5.5	1/2" MNPT	2-Pin/Leads

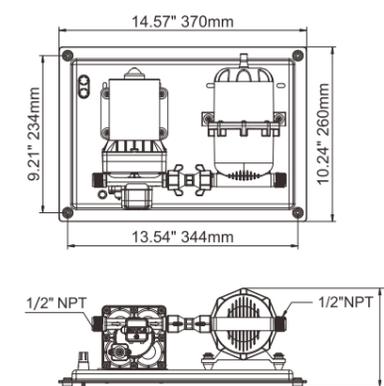

Standard Accessories:

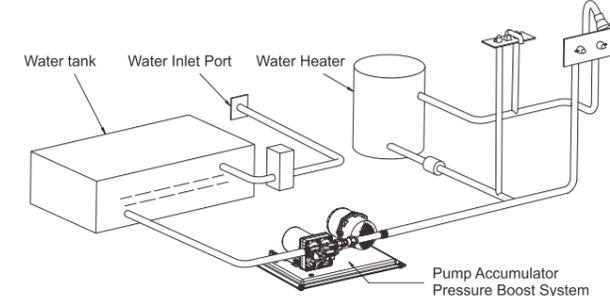

Standard Pump Configurations

Model	Tank Volume	Voltage	Control Type	GPM/LPM	Pressure On (PSI/BAR)	Pressure Off (PSI/BAR)	Max Draw(A)	Ports	Wire Connections
SFWSK1-030-055-002	0.75 L	12 V	Switch & By Pass	3.0/11.3	45/3.1	55/3.8	7.5	1/2" MNPT	2-Pin/Leads
SFWSK2-030-055-002	0.75 L	24 V	Switch & By Pass	3.0/11.3	45/3.1	55/3.8	4.0	1/2" MNPT	2-Pin/Leads



Color Box



Kraft Box



51 Series High Flow Water Pressure System

5.5 GPM/20.8LPM Pump with Integrated Accumulator Tank



FEATURES & BENEFITS

- Powerful 5.5 gallons/20.8 litres per minute of flow
- Ultra quiet with constant and steady flow
- Superior self-priming capabilities
- Powerful enough to supply up to 5 fixtures
- Built-in adjustable pressure switch
- Easy pre-assembled installation
- Heavy-duty, corrosion resistant motor
- Capable of being run dry without damage
- Can be fitted to new or existing systems


PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2" MNPT
- Weight**
9.7 lbs (4.4 kg)

PERFORMANCE

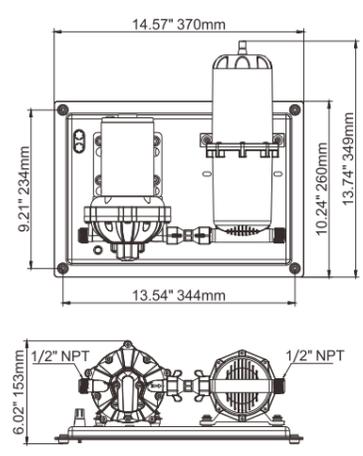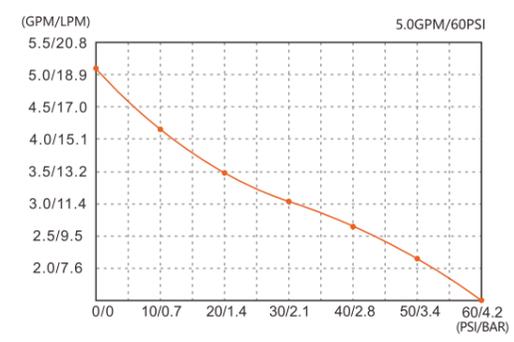

Standard Accessories:

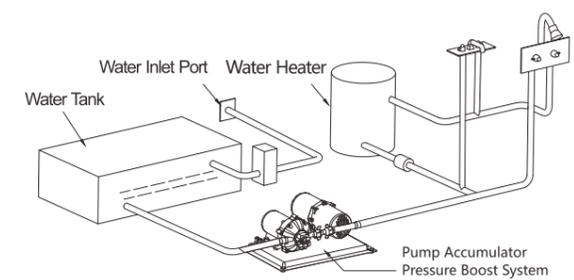

Standard Pump Configurations

Model	Tank Volume	Voltage	Control Type	GPM/LPM	Pressure On (PSI / BAR)	Pressure Off (PSI / BAR)	Max Draw(A)	Ports	Wire Connections
SFWSK1-055-060-003 NEW	1.0 L	12 V	Switch	5.5/20.8	50/3.4	60/4.2	18.0	1/2" MNPT	2-Pin/Leads
SFWSK2-055-060-003 NEW	1.0 L	24 V	Switch	5.5/20.8	50/3.4	60/4.2	9.0	1/2" MNPT	2-Pin/Leads

Luxury Pump Accumulator Pressure Boost System



FEATURES & BENEFITS

- Smoother flow, quieter water systems.
- Longer pump life, lower battery drain.
- Self-priming up to 6 feet (1.8 m).
- Five Chamber diaphragms for smooth and quiet operation.
- Can be installed vertically or horizontally.
- Maintenance free potable water quality accumulator tank.
- Complies with USCG 183.410 and ISO 8846 MARINE (Ignition Protection).
- 16 AWG, 4.5" long Leads

PUMP

- Max Recommended Temperature**
140 °F (60 °C) Max.
- Priming Capabilities**
6 feet (1.8 m) suction lift
- Inlet/Outlet Ports**
1/2"-14 MNPT
- Weight**
11.9 lbs (5.4 kg)

PERFORMANCE

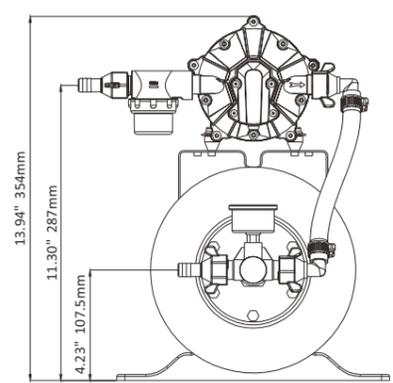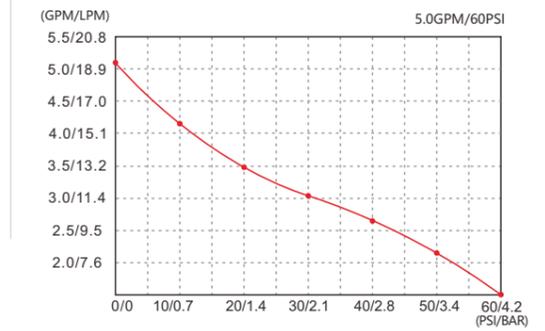

Standard Accessories:



Standard Pump Configurations

Model	Tank Volume	Voltage	Control Type	GPM/LPM	Pressure On (PSI / BAR)	Pressure Off (PSI / BAR)	Max Draw(A)	Ports	Wire Connections
SFWSK1-030-060-0021 NEW	8 L	12 V	Switch	3.0/11.3	40/2.8	60/4.2	10.0	1/2" barb	2-Pin/Leads
SFWSK2-030-060-0021 NEW	8 L	24 V	Switch	3.0/11.3	40/2.8	60/4.2	5.5	1/2" barb	2-Pin/Leads
SFWSK1-040-060-0021 NEW	8 L	12 V	Switch	4.0/15.0	40/2.8	60/4.2	13.0	1/2" barb	2-Pin/Leads
SFWSK2-040-060-0021 NEW	8 L	24 V	Switch	4.0/15.0	40/2.8	60/4.2	7.0	1/2" barb	2-Pin/Leads
SFWSK1-050-060-0021 NEW	8 L	12 V	Switch	5.0/18.9	40/2.8	60/4.2	17.0	1/2" barb	2-Pin/Leads
SFWSK2-050-060-0021 NEW	8 L	24 V	Switch	5.0/18.9	40/2.8	60/4.2	9.0	1/2" barb	2-Pin/Leads



Color Box



Color Box






Air Conditioning Pump 250 GPH

FEATURES & BENEFITS

- For use with AC system up to 12,000 BTU
- More than 10,000 hours lifetime
- 5 GPM seawater circulation pump
- Run dry safe for normal workloads
- Continuous duty
- Replaces any brand marine air conditioning pump

PUMP

- Liquid**
130 °F (54 °C) Max.
- Inlet/Outlet Ports**
Inlet:
3/8" NPT & 3/4" NPT
Outlet:
1/4" NPT

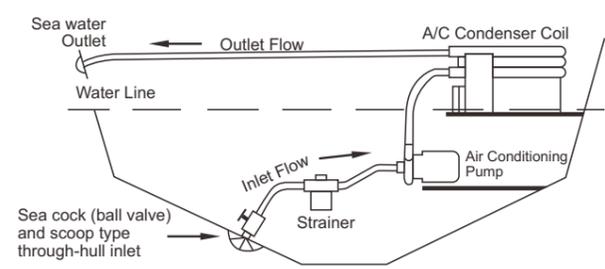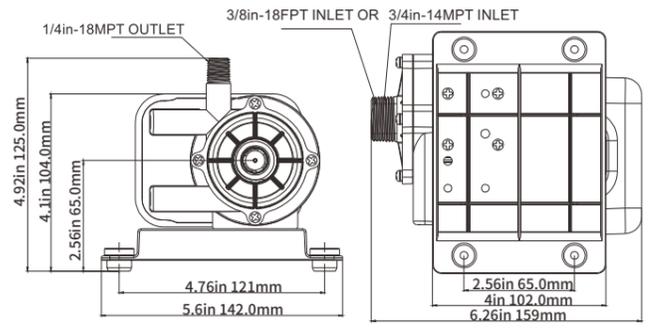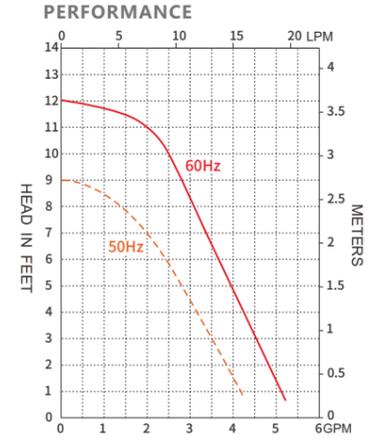

standard pump configurations

Model	SFCPA1-G250-01		SFCPA2-G250-01	
Voltage	115 V		230 V	
Frequency	60 Hz	50 Hz	60 Hz	50 Hz
Flow Rate	5 GPM	18.5 LPM	5 GPM	18.5 LPM
Head	13 ft / 5.7 psi	2.7 m	13 ft / 5.7 psi	2.7 m
Power	56 W	56 W	55 W	55 W
Amps Draw	0.99 A	1.1 A	0.50 A	0.56 A




Air Conditioning Pump 500 GPH

FEATURES & BENEFITS

- For use with AC system up to 12,000 BTU
- More than 10,000 hours lifetime
- 8.5 GPM seawater circulation pump
- Run dry safe for normal workloads
- Continuous duty
- Replaces any brand marine air conditioning pump

PUMP

- Liquid**
130 °F (54 °C) Max.
- Inlet/Outlet Ports**
Inlet:
3/4" FPT
Outlet:
1/2" MPT

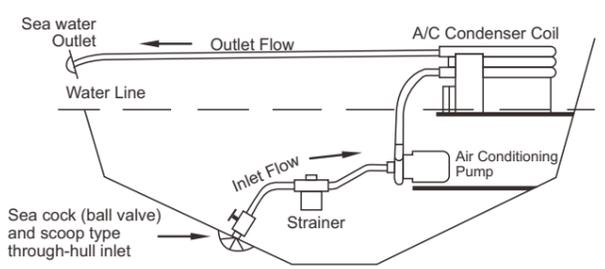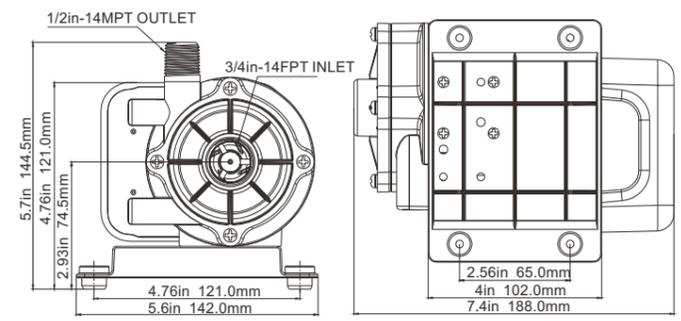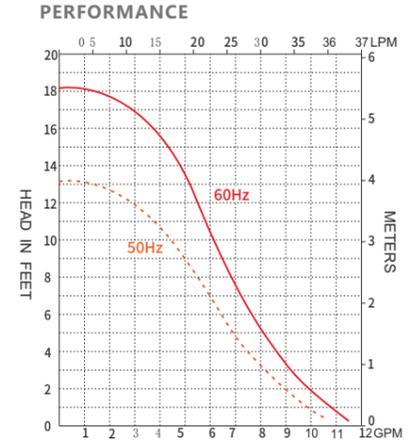


standard pump configurations

Model	SFCPA1-G500-01		SFCPA2-G500-01	
Voltage	115 V		230 V	
Frequency	60 Hz	50 Hz	60 Hz	50 Hz
Flow Rate	8.5 GPM	31 LPM	8.5 GPM	31 LPM
Head	19 ft / 8.2 psi	4.3m	19 ft / 8.2 psi	4.3 m
Power	115 W	110 W	110 W	105 W
Amps Draw	1.8 A	1.9 A	0.9A	0.9A


In-line Blowers 01 / 02 Series

FEATURES & BENEFITS

- Meets or exceeds ISO 8846 certification
- Built-in mounting feet allows easy vertical or horizontal installation
- Very low current draw, high volume air flow, long life
- Four/Six-blade fan maximizes airflow and efficiency
- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing

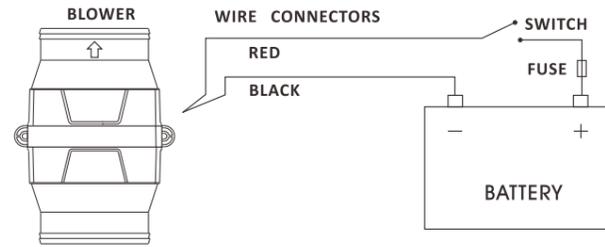

01 Series

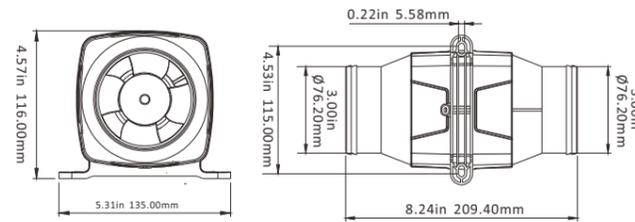

130 CFM


Technical Date

Model	Volts(V)	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Intake Pipe Dia	Packing Size(mm)	N.W./G.W. (kg)
SFIB1-130-01	12V	130/220	2.5A	5.0A	3" / 76 mm	215*137*120	0.45/0.60 kg
SFIB2-130-01	24V	130/220	1.3A	3.0A	3" / 76 mm	215*137*120	0.45/0.60 kg


In-line Blowers 03 / 04 Series

FEATURES & BENEFITS

- Meets or exceeds ISO 8846 certification
- Built-in mounting feet allows easy vertical or horizontal installation
- Very low current draw, high volume air flow, long life
- Five blade fan maximizes airflow and efficiency
- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing
- Smaller size for any limited area

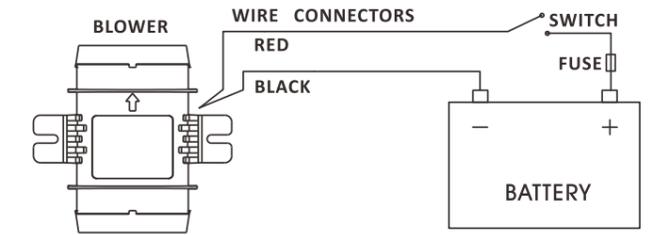

03 Series

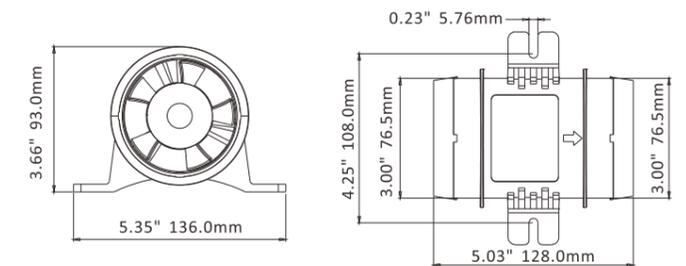


145 CFM

Technical Date

Model	Volts	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Intake Pipe Dia	Packing Size(mm)	N.W./G.W. (kg)
SFIB1-145-03	12 V	145/247	3.0	5.0	3" / 76 mm	140*133*95	0.34/0.41 kg
SFIB2-145-03	24 V	145/247	1.5	2.5	3" / 76 mm	140*133*95	0.34/0.41 kg



02 Series

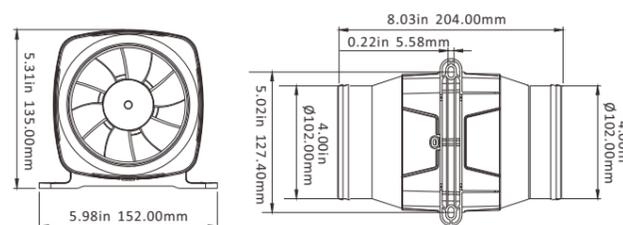


270 CFM

Technical Date

Model	Volts(V)	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Intake Pipe Dia	Packing Size(mm)	N.W./G.W. (kg)
SFIB1-270-02	12V	270/456	6.0A	10.0A	4" / 102 mm	207*154*114	0.70/0.90 kg
SFIB2-270-02	24V	270/456	3.0A	5.0A	4" / 102 mm	207*154*114	0.70/0.90 kg



04 Series

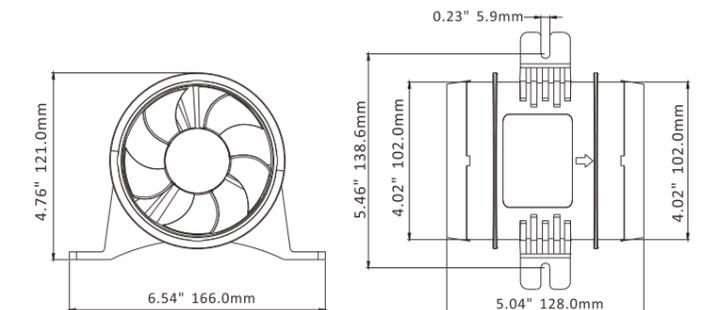

235 CFM

Technical Date

Model	Volts	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Intake Pipe Dia	Packing Size(mm)	N.W./G.W. (kg)
SFIB1-235-04	12 V	235/400	4.0	7.0	4" / 102 mm	170*133*123	0.40/0.49 kg
SFIB2-235-04	24 V	235/400	2.0	4.0	4" / 102 mm	170*133*123	0.40/0.49 kg



Color Box

Bilge Blowers 01 Series

FEATURES & BENEFITS




- Dual Mounting Options
- Efficient high volume air flow
- Very low current draw, long life
- Flex Mount or Flange Mount

- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing
- Ignition protected
- CE conforms with EN 50014-1, EN N 61000-3-3




TYPICAL APPLICATIONS

- Boats bilge ventilation
- Engine compartments
- Galleys and heads

Flange Mount

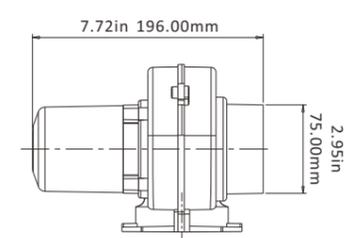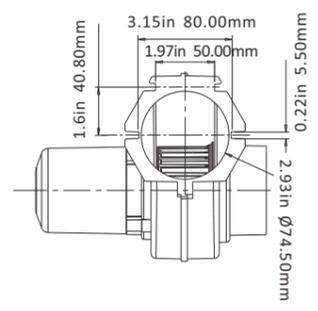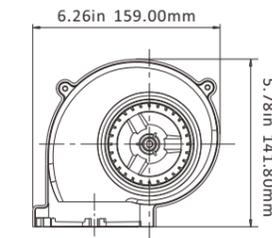

Flex Mount

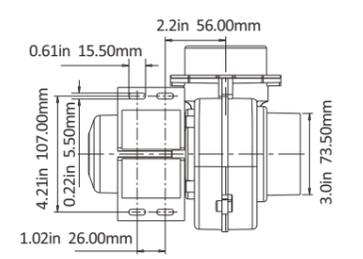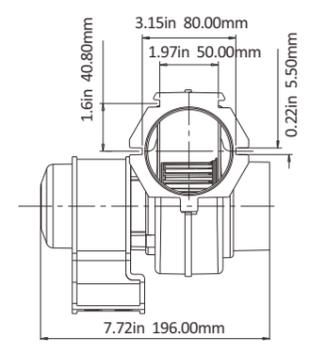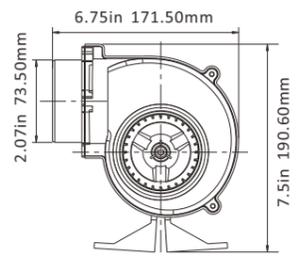

Technical Date

Model	Volts	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Packing Size(mm)	N.W./G.W. (kg)
SFBB1-130-01	12 V	130/220	2.5	5	160*160*200	0.71/0.83 kg
SFBB2-130-01	24 V	130/220	1.5	3	160*160*200	0.71/0.83 kg

Bilge Blowers 02 / 03 Series

FEATURES & BENEFITS

- Efficient high volume air flow
- Very low current draw, long life
- Available in either Flex Mount or Flange Mount
- Sealed motor shaft for moisture protection
- Corrosion resistant ABS plastic housing
- Ignition protected
- CE conforms with EN 50014-1, EN N 61000-3-3


TYPICAL APPLICATIONS

- Boats bilge ventilation
- Engine compartments
- Galleys and heads
- Bus ventilation (engine and bathroom fumes)



Color Box

02 Series

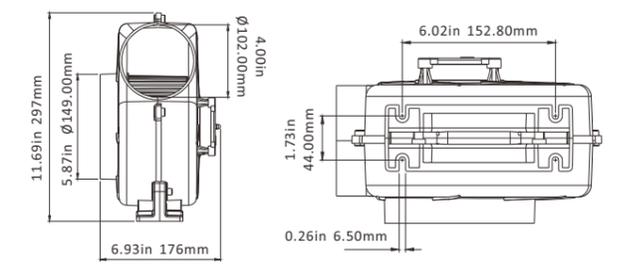

Flex Mount-02

The flex mount is when the motor mounting bracket is used to secure to blower, hose would have to be connected to both the inlet and outlet.


Technical Date

Model	Volts	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Packing Size(mm)	N.W./G.W. (kg)
SFBB1-320-02	12 V	320/550	11.0	16.0	300*270*280	2.27/2.45 kg
SFBB2-320-02	24 V	320/550	6.0	10.0	300*270*280	2.27/2.45 kg



Color Box

03 Series

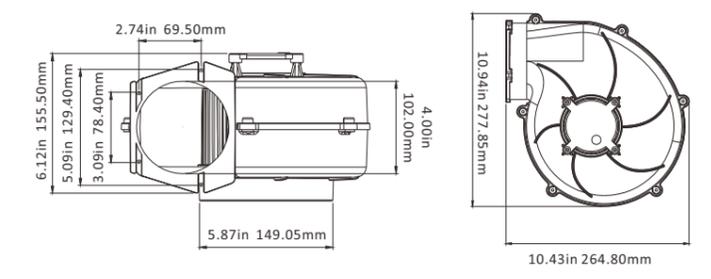

Flange Mount-03

The flange mount is when the blower is mounted using the outlet mounting flange to secure the pump.

Technical Date

Model	Volts	Air Flow (cfm/cmh)	Amp Draw(A)	Fuse (A)	Packing Size(mm)	N.W./G.W. (kg)
SFBB1-320-03	12 V	320/550	11.0	16.0	300*270*280	2.46/2.56 kg
SFBB2-320-03	24 V	320/550	6.0	10.0	300*270*280	2.46/2.56 kg



SFCBS-300-203

Color Box



SFCBS-300-301




Dual Circuit ON/OFF Battery Disconnect Switch

FEATURES

- Switches an isolated battery bank to all loads or combines battery banks to all loads
- The Combine function can be used to parallel the batteries in the event of a low engine battery. (only SFCBS-300-301)
- Tin-plated copper studs for maximum conductivity and corrosion resistance
- Studs accept 3/8" (M10) ring terminals
- One-piece terminal stud design never loosens over time
- Isolating cover with three snap-off side pieces protects rear contacts and allows wire access in any direction

Regulatory

- CE, RoHS, ISO 8846
- Meets all American Boat and Yacht Council (ABYC) requirements for battery switches
- Meets UL 1500 and SAE J1171 external ignition protection requirements
- IP66 – protected against powerful water jets

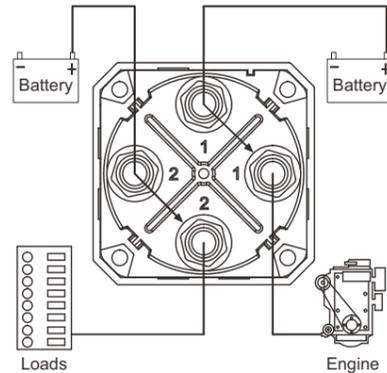






Dual Circuit Plus ON/OFF Battery Disconnect Switch

FEATURES

- Switches an isolated battery bank to all loads or combines battery banks to all loads
- The Combine function can be used to parallel the batteries in the event of a low engine battery. (only SFCBS-300-301)
- Tin-plated copper studs for maximum conductivity and corrosion resistance
- Studs accept 3/8" (M10) ring terminals
- One-piece terminal stud design never loosens over time
- Isolating cover with three snap-off side pieces protects rear contacts and allows wire access in any direction

Regulatory

- CE, RoHS, ISO 8846
- Meets all American Boat and Yacht Council (ABYC) requirements for battery switches
- Meets UL 1500 and SAE J1171 external ignition protection requirements
- IP66 – protected against powerful water jets

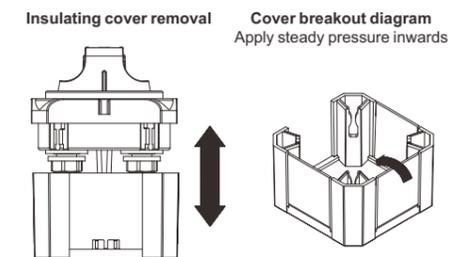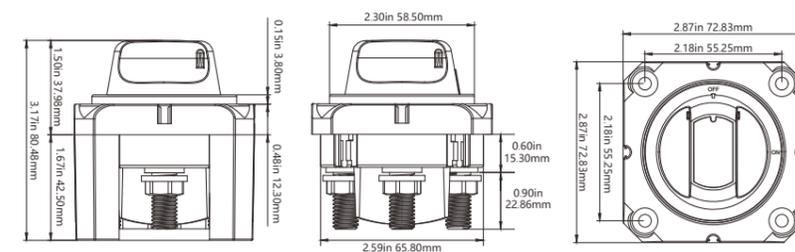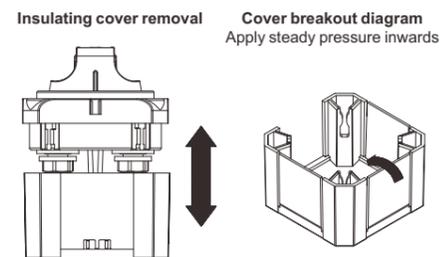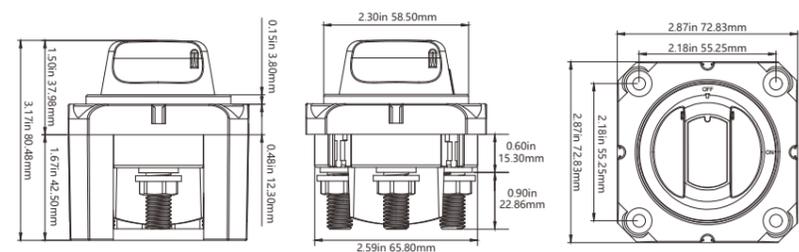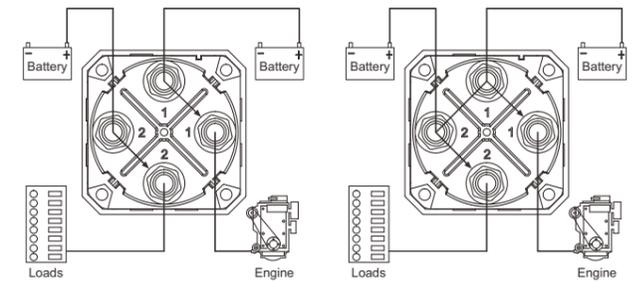

Specifications

Model	SFCBS-300-203
Cranking Rating: 30 sec.	675A DC
Intermittent Rating: 5 min.	450A DC
Continuous Rating	300A
DC Terminal Stud, Tin-Plated Copper	3/8" -16 (M10)
Torque 120 in-lb (13.56 N-m) Cable Size to Meet Ratings*	4/0 AWG (120 mm ²)
Maximum Voltage Rating	32 Volts DC

Switch Mounting Options



Specifications

Model	SFCBS-300-301
Cranking Rating: 30 sec.	675A DC
Intermittent Rating: 5 min.	450A DC
Continuous Rating	300A
DC Terminal Stud, Tin-Plated Copper	3/8" -16 (M10)
Torque 120 in-lb (13.56 N-m) Cable Size to Meet Ratings*	4/0 AWG (120 mm ²)
Maximum Voltage Rating	32 Volts DC

Switch Mounting Options





SFCBS-300-202



SFCBS-300-402



Single Circuit ON/OFF Battery Disconnect Switch


FEATURES

- Switches a single battery to a single load group
- Tin-plated copper stud studs for maximum conductivity and corrosion resistance
- Studs accept 3/8" (M10) ring terminals
- One-piece terminal stud design never loosens over time
- Isolating cover with three snap-off side pieces protects rear contacts and allows wire access in any direction

Regulatory

- CE, RoHS, ISO 8846
- Meets all American Boat and Yacht Council (ABYC) requirements for battery switches
- Meets UL 1500 and SAE J1171 external ignition protection requirements
- IP66 – protected against powerful water jets


Switch Mounting Options

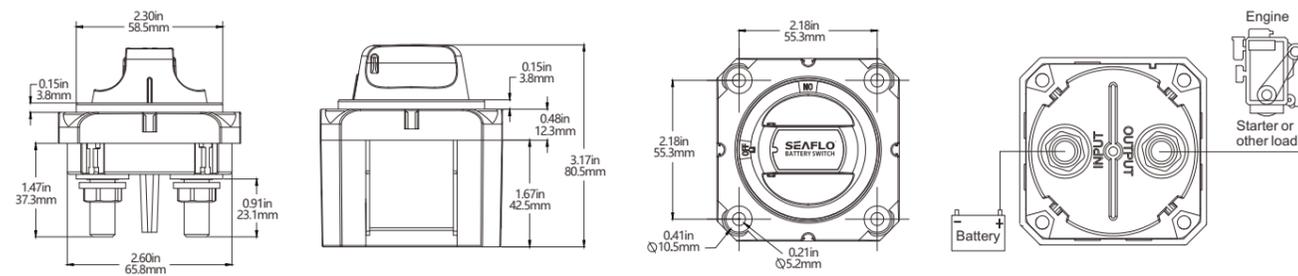

Specifications


Model	SFCBS-300-202
Cranking Rating: 30 sec.	900A DC
Intermittent Rating: 5 min.	500A DC
Continuous Rating	300A
DC Terminal Stud, Tin-Plated Copper	3/8" -16 (M10)
Torque 120 in-lb (13.56 N-m) Cable Size to Meet Ratings*	4/0 AWG (120 mm ²)
Maximum Voltage Rating	48 Volts DC

Insulating cover removal



Cover breakout diagram

Apply steady pressure inwards



Switch Mounting Options: Surface mounting, Front panel mounting and Rear panel mounting

4 Position Mini Selector Battery Switch


FEATURES

- Switches an isolated battery bank to all loads or combines battery banks to all loads
- Tin-plated copper stud studs for maximum conductivity and corrosion resistance
- Studs accept 3/8" (M10) ring terminals
- One-piece terminal stud design never loosens over time
- Isolating cover with three snap-off side pieces protects rear contacts and allows wire access in any direction

Regulatory


- CE, RoHS, ISO 8846
- Meets all American Boat and Yacht Council (ABYC) requirements for battery switches
- Meets UL 1500 and SAE J1171 external ignition protection requirements
- IP66 – protected against powerful water jets

Switch Mounting Options

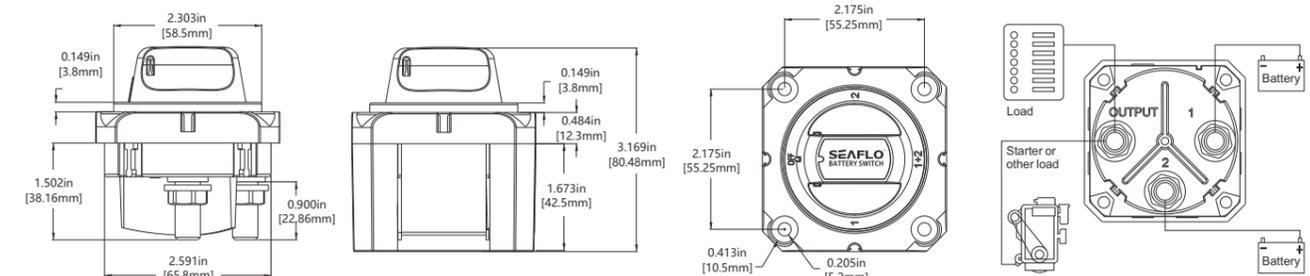

Specifications

Model	SFCBS-300-402
Cranking Rating: 30 sec.	900A DC
Intermittent Rating: 5 min.	500A DC
Continuous Rating	300A
DC Terminal Stud, Tin-Plated Copper	3/8" -16 (M10)
Torque 120 in-lb (13.56 N-m) Cable Size to Meet Ratings*	4/0 AWG (120 mm ²)
Maximum Voltage Rating	32 Volts DC

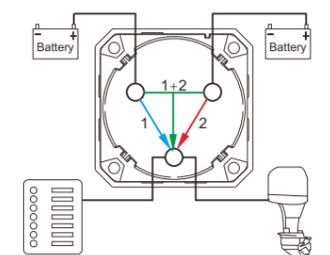


1 or 2 or 1+2

Switch Mounting Options: Surface mounting, Front panel mounting and Rear panel mounting

Battery Isolator Switch

FEATURES & BENEFITS

An interchangeable labeling system allowing a full range of applications.
Removable side plates on 4 sides for access of up to 1/0 cables plus a rear cover insulating the rear terminals against any short circuits.
ABS Anti-aging, Anti-ultraviolet.
May be connected to either the positive or the negative electric cable.

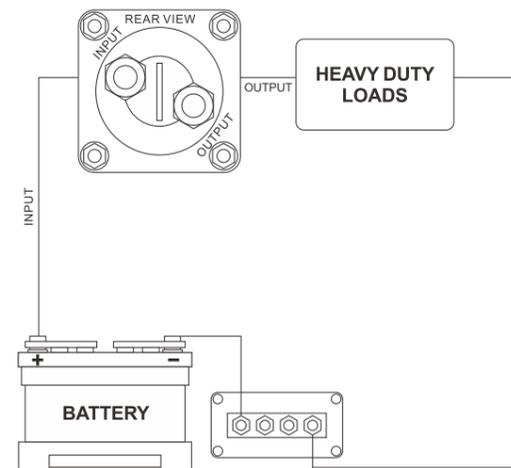

Model	Max.Volt	Amp Draw(A)	Max Amp Draw(A)	Switch Position	Packing Size	N.W./G.W.
SFCBS-275-201	50 V	275	1250	2	78*78*80 mm	0.20/0.30 kg

Battery Selector Switch

FEATURES & BENEFITS

The selector switch will allow the use of one battery for engine starting and one battery for auxiliary electrical equipment.
Batteries may be placed in parallel by switching to (BOTH) for emergency usage
Small in size, Fine appearance, Sturdy and durable
3/8"-16 tin-plated copper studs for maximum conductivity and corrosion resistance Can be installed in any position
175A continuous duty at DC-12V
300A intermittent duty at DC-12V
Suitable for 6V, 12V, 24V and 32V ship's supply system

4 POSITIONS

- OFF** - Complete disconnect of both batteries or banks of batteries
- 1** - Operation of No.1 battery only
- 2** - Operation of No.2 battery only
- BOTH** - Operation of both batteries and banks of batteries




Model	Max.Volt	Amp Draw(A)	Max Amp Draw(A)	Switch Position	Packing Size	N.W./G.W.
SFCBS-175-402	6-12-24-32	175	300	3	140*140*85 mm	0.45/0.65 kg

Battery Isolator Switch


FEATURES & BENEFITS

An interchangeable labeling system allowing a full range of applications.
ABS Anti-aging, Anti-ultraviolet.
May be connected to either the positive or the negative electric cable.
In the "OFF" position the key may be removed. (SFIBS1-01 only)
Small in size, Fine appearance, Sturdy and durable.

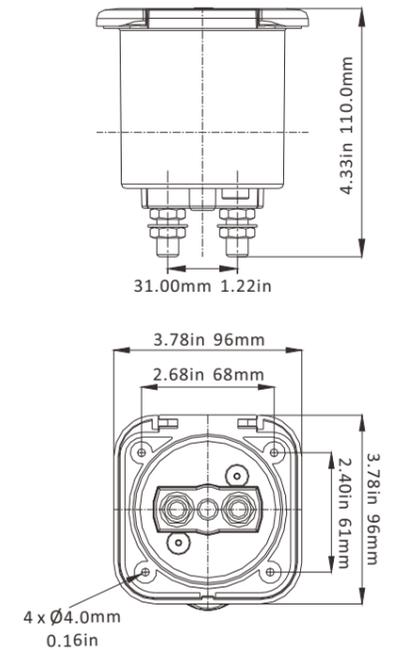

Product Specifications

Model	Voltage	Amps Draw(A)	Max Amp Draw(A)	N.W.	Working Tempure°C	Package
SFIBS1-01	50 V	275	1250	0.29 kg	40-80	Kraft Box

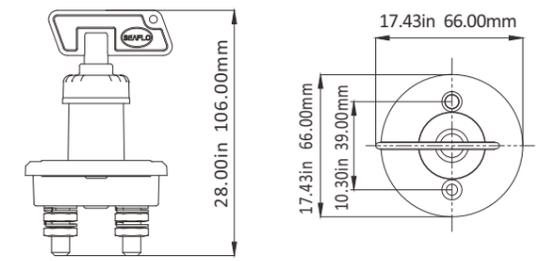

Product Specifications

Model	Voltage	Amps Draw(A)	Max Amp Draw(A)	N.W.	Working Tempure°C	Package
SFIBS2-01	50 V	275	1250	0.15 kg	40-80	PE Bag

Premium Portable Travel Toilet

Your best choice for Marine, RV, Camping, Board Room, Medical Care, Pregnant women, Children and The Elderly.

FEATURES & BENEFITS

- Powerful Tri-Directional Flush
- Fresh Water Tank with Piston-Flush
- Slick Anti-Stick Oversized Bowl
- Detachable Fully-Sealed Holding Tank
- Rotating Elbow For Clean & Distant Dumping
- Air Relief Button Eliminates Gurgles & Splash Back
- Sealed Design Prevents Leaks, Spills and Odors
- Removable Seat & Cover For Easy Cleaning
- Waste Tank Level Indicator
- Sleek, Lightweight & Durable Modern Design



Level Indicator
Display the level of content in waste tank, avoid overflow protection.



270° Rotating Emptying Spout
M60mm rotating spout, for hygiene and better experience.



Built-in Storage Bin
Can put toilet paper or detergent



Air Release Button
Press the button to prevent spilling and splashing before use. Decompression valve exhausts to prevent sewage from spraying out.




Powerful Tri-Directional Flush Nozzle
360° vortex scouring. It uses as little as 50ml water to flush the whole bowl and waste tank can be cleaned thoroughly. Ergonomic toilet seat, longer, deeper and more comfortable.



Upgraded Lock Buckle
Connect the two tanks firmly together




Color Box

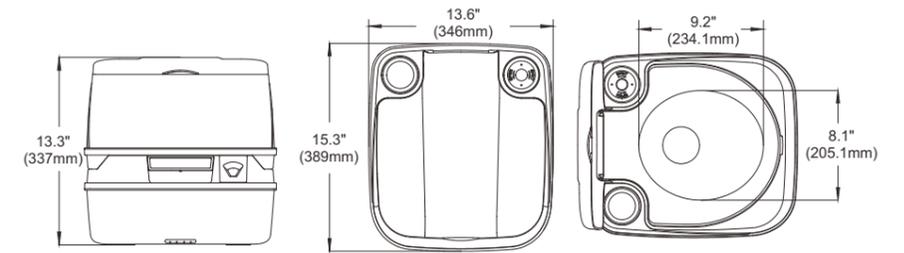

Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-12-03	10 L (2.6 Gallon)	12 L (3.2 Gallon)	389*346*337	White	PP, POM, ABS	1 x Portable Toilet, 1 x Owners' Manual



Color Box

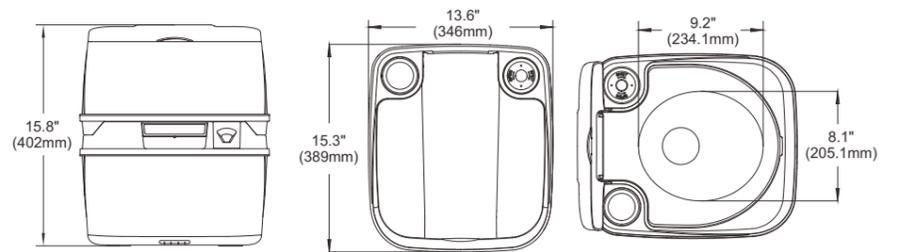

Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-18-03	10 L (2.6 Gallon)	18 L (4.8 Gallon)	389*346*402	White	PP, POM, ABS	1 x Portable Toilet, 1 x Owners' Manual



Quiet Flush Marine Toilet
SFMT-03-R

RV Toilet
SFRTPH-01-01

Economy Portable Toilet
SFPT-20-02

Premium Portable Toilet
SFPT-18-03

Portable Toilets, Rv Toilets and Marine Toilets

SEAFLO offers a complete line of portable toilets and marine toilets to fit most outdoor and marine applications. The SEAFLO portable toilet is intended for mobile use, such as camping, boating, caravans, cabins, medical, children, home, emergencies, etc. It has high quality construction and makes it strong and durable. Its lightweight design makes it easy to transport and be placed anywhere.

SEAFLO Residential Height RV Toilet is a classic style RV toilet suited for all recreational vehicles. Comfortable seat and height give you a home-like experience. Gravity flush system - Efficient foot pedal operation with adjustable water volume. Slick Anti-Stick Oversized Bowl Allows for Easy Flushing.

SEAFLO Marine toilets with both pump & bowl are interchangeable with JABSCO, in 12v and 24v models. Their rugged design provides performance that you can rely on for years.



Caravan

Yacht

Camping

Medical care

Children

Portable Toilet

FEATURES & BENEFITS

- Impact & drop resistant, well-sealed
- Double-layer seal to isolate peculiar smell
- Compact design for easy storage and transportation
- Large, comfortable seat, simple to use, easy to maintain
- Split portable design, easy to carry
- Anti-slip and anti-drop design
- No external water or power connections required
- The surface of the material is smooth, easy to wash, safe and environmentally friendly

Marine Toilet

FEATURES & BENEFITS

- Both pump & bowl are interchangeable with JABSCO.
- All spare parts can be ordered individually.
- Easy-to-clean china bowl.
- Includes heavy-duty push button and 1" or 1-1/2" discharge hose adapter.
- Built-in Back Flow Preventer.
- All Corrosion Resistant Material for Marine Use.
- Electric toilets or manually operated toilets with regular bowl or compact size available.



Multifunctional Portable Toilet 20L

Your best choice for Marine, RV, Camping, Board Room, Medical Care, Pregnant women, Children and The Elderly.

FEATURES & BENEFITS

- Impact & drop resistant, well-sealed
- Double-layer seal to isolate peculiar smell
- Compact design for easy storage and transportation
- Large, comfortable seat, simple to use, easy to maintain
- Split portable design, easy to carry
- Anti-slip and anti-drop design
- Blow molding process is integrated, durable and leak-proof
- Load-bearing connection lock
- The surface of the material is smooth, easy to wash, safe and environmentally friendly



Level Indicator
Display the level of content in waste tank, avoid overflow protection.






180° Rotating emptying spout
M60mm rotating spout, for hygiene and better experience.



Air Release Button
Press the button to prevent spilling and splashing before use. Decompression valve exhausts to prevent sewage from spraying out.



T-type flush nozzle and bowl
360° vortex scouring. It uses as little as 50ml water to flush the whole bowl and waste tank can be cleaned thoroughly. Ergonomic toilet seat, longer, deeper and more comfortable.

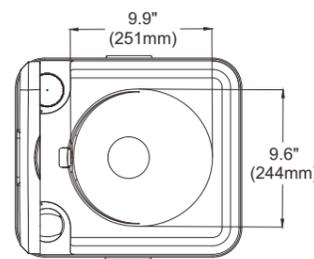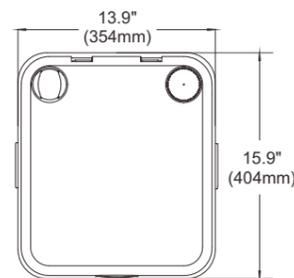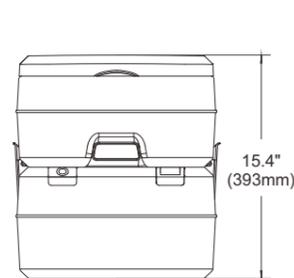

Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-20-02	13 L (3.43 Gallon)	20 L (5.28 Gallon)	404*354*393	Grey	PP, PA, HDPE, ABS	1 x Portable Toilet, 1 x Owners' Manual

Portable Toilet

Your Best Choice For Marine, Rv, camping Board Room, Medical Care, Children

FEATURES & BENEFITS

- Light weight and durable
- Brand new and high quality
- Compact design for easy storage and transportation
- Large, comfortable seat, simple to use, easy to maintain
- No external water or power connections required
- Easy to carry, easy to clean



Cover Of Waste Holding Tank



Split Portable Design



Hand Pump






Handle Of Waste Water Valve






Waste Water Valve



Sewage Drain Outlet

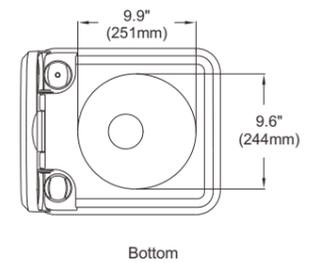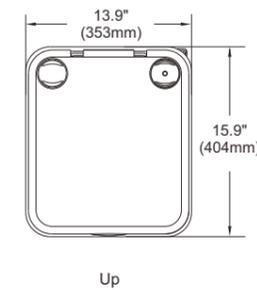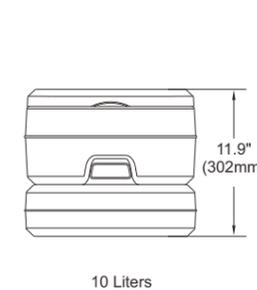

Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-10-01	13 L (3.43 Gallon)	10 L (2.64 Gallon)	404*353*302	Grey	PP, PA, HDPE, ABS	1 x Portable Toilet, 1 x Owners' Manual

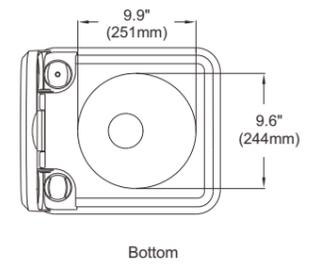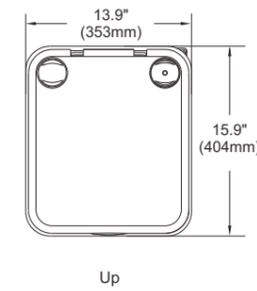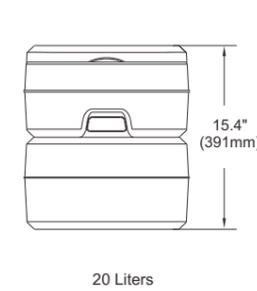



Model	Fresh water tank	Waste holding tank	Dimension(L*W*H)mm	Color	Material	Package includes
SFPT-20-01	13 L (3.43 Gallon)	20 L (5.28 Gallon)	404*353*391	Grey	PP, PA, HDPE, ABS	1 x Portable Toilet, 1 x Owners' Manual

Residential Height Rv Toilet-Plastic



FEATURES & BENEFITS

- Sleek, Lightweight and Durable Modern Design
- Residential Height with Elongated Inner Seat and Bowl - Brings at Home Comfort to your RV
- High-Powered Tri-Directional Flush Nozzles Remove Waste Completely with Each Flush
- Ergonomic Foot Pedal allows for Easiest In-Class Activation -with Adjustable Water Flow
- Soft Close Seat and Cover - Prevents Slamming when in Motion
- Slick Anti-Stick Oversized Bowl Allows for Easy Flushing
- Bowl Design Prevents Splash-Back
- Design Optimization Allows for Easiest In-Class Cleaning
- Easy to Install - Mounting Brackets Engineered for Easier Accessibility for Faster Installation

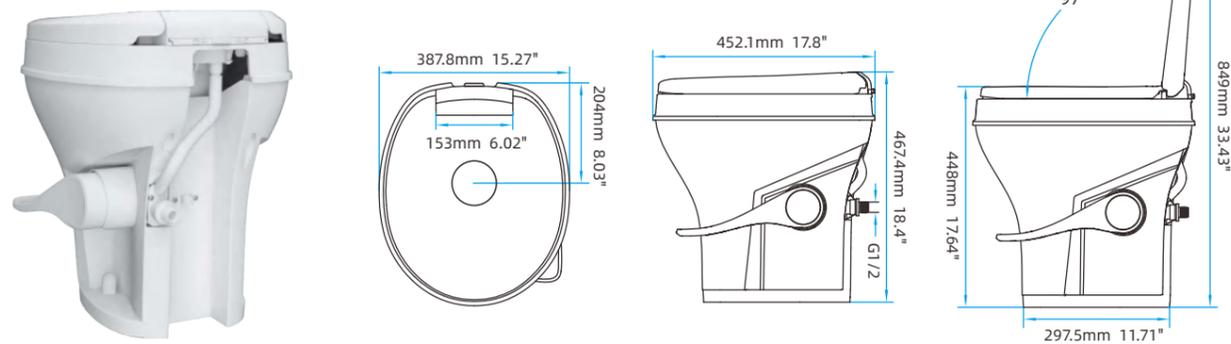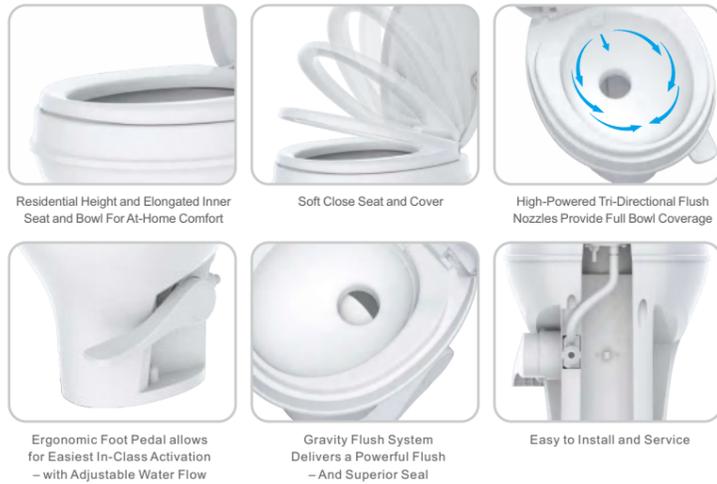

Model	Size	Accessories	Dimension	Color
SFRTPH-01-01	Standard Height - 18.5"	No	452*388*468mm	White
SFRTPH-02-01	Standard Height - 18.5"	No	452*388*468mm	Bone



Model	Size	Accessories	Dimension	Color
SFRTPH-01-02	Standard Height - 18.5"	Hand Spray Kit	452*388*468mm	White
SFRTPH-02-02	Standard Height - 18.5"	Hand Spray Kit	452*388*468mm	Bone

Residential Height Rv Toilet-Ceramic



FEATURES & BENEFITS

- Deep, 100 % vitreous ceramic bowl
- Residential Height with Elongated Inner Seat and Bowl - Brings at Home Comfort to your RV
- High-Powered Tri-Directional Flush Nozzles Remove Waste Completely with Each Flush
- Ergonomic Foot Pedal allows for Easiest In-Class Activation -with Adjustable Water Flow
- Soft Close Seat and Cover - Prevents Slamming when in Motion
- Slick Anti-Stick Oversized Bowl Allows for Easy Flushing
- Bowl Design Prevents Splash-Back
- Design Optimization Allows for Easiest In-Class Cleaning
- Easy to Install - Mounting Brackets Engineered for Easier Accessibility for Faster Installation

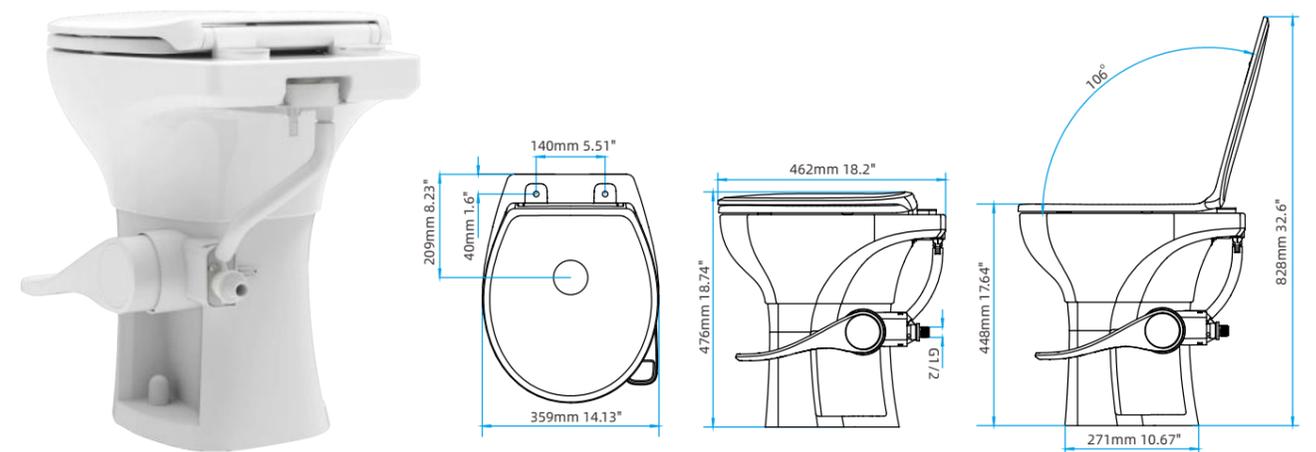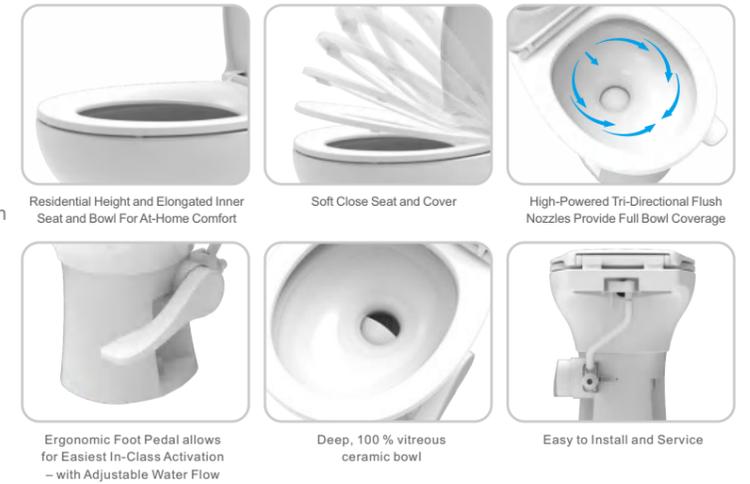

Model	Size	Accessories	Dimension
SFRTCH-01-01	Standard Height - 18.5"	No	462*359*476mm

Model	Size	Accessories	Dimension
SFRTCH-01-02	Standard Height - 18.5"	Hand Spray Kit	462*359*476mm

Hand Spray Kit

FEATURES & BENEFITS

- White, hand spray hose for rv toilet
- Makes rinsing the bowl a breeze
- Convenient way to save water
- includes hose and wall mount



Model	Color
SFRTK-002	White

Socket Floor Flange

FEATURES & BENEFITS

- Replacement socket floor flange for RV Toilet
- Easy to install
- Fits 3" to 4" drain pipes
- Perfect close seal with the floor
- Prevent the toilet from shaking



Model	Color
SFRTK1-001	White
SFRTK2-001	Black

Water Valve Kit

FEATURES & BENEFITS

- Toilet Water Valve Kit Replacement Kit Compatible with SEAFLO Gravity Flush RV Toilet
- Use high-quality materials to extend the service life of the valve
- Easy to use

Model	Color
SFRTK-003	White
SFRTK-004	White

RV Toilet Seat & Cover

FEATURES & BENEFITS

- Designed for use with SEAFLO Gravity Flush RV Toilet
- Soft close seat
- Easy to replace
- Soft Close Seat



Model	Color
SFRTK-006	White

RV Toilet Seal

FEATURES & BENEFITS

- RV Toilet Seal Replacement for Gravity Flush RV Toilet
- Easy to Install
- High Quality, long service life
- Size: Outer Diameter: 4 Inch; Inner Diameter: 2.75 Inch.



Model	Color
SFRTK-005	Black

Bio-pak For Spetic Toilet Treatment

Simply add one Bio-Pak into the toilet holding tank by flushing or directly add. The entire packet dissolves. Use adequate water to disperse packet contents and cover the bottom of the holding tank. Wait for 24 hours until the dirt in the pool is completely decomposed, and then it can be discharged directly. Typically one pack of product can be used for a 20 gallon pool.

FEATURES & BENEFITS

- Remove odors / No fungicide / Formaldehyde free
- 100% biodegradable
- Safe and reliable / No residues
- Rapidly degrades paper and feces

MAIN INGREDIENTS

Biological enzymes, adsorbents, deodorants, flocculants



SFTB-01

Suitable for RV, marine, portable toilet and family

Manually Operated Marine Toilet

SEAFLO Manually Operated Marine Toilet can be installed in both power and sailing craft, either above or below the waterline, for use on sea, river, lake or canal. Your installation may discharge the waste either overboard (provided that your national and local regulations allow this), or into a treatment system or into an on-board holding tank (U.S.C.G. Marine Sanitation Devices Type I, II and III).

FEATURES & BENEFITS



- Baked enamel seat & cover in compact or regular size.
- Twist "n" Lock handle eliminates leaks.
- Can be reassembled with the pump on the right or left side.
- Powerful self-priming pump for above or below waterline installation.
- Crevice free contours and smooth mouldings for added hygiene.
- Automatic vacuum breaker for easier pumping.
- Angled pump housing and long stroke for ease of installation.
- Wood seat with baked enamel finish for compact type only.
- Soft close seat for regular type only.



Hand Flush Pump SFMTP-03





Color Box

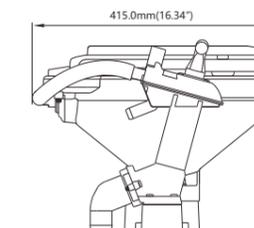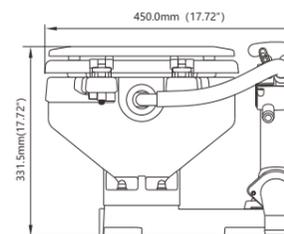

Model	Color	Diameter	Size	Type	Material
SFMTM-01	White	3/4" Inlet 1 1/2" Discharge	Compact	Manual Piston	Ceramic bowl, wood seat with baked enamel finish



Color Box

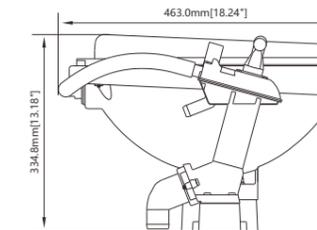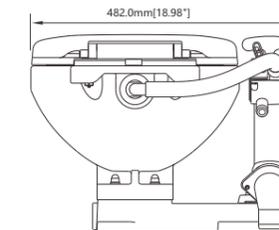

Model	Color	Diameter	Size	Type	Material
SFMTM-01-R	White	3/4" Inlet 1 1/2" Discharge	Regular	Manual Piston	Ceramic bowl, Soft close seat

Electric Marine Toilet

A dual-function pump eliminates the need for hand pumps and dry-bowl valves. With the push of a button, the self-priming flush pump rinses the bowl as the Macerator and high-capacity scavenger pump grind up waste and pump it out. Includes a heavy-duty push button and 1" discharge hose adapter. Easy-to-clean ceramic bowl.

FEATURES & BENEFITS

- Convenient push-button flush.
- Easy-to-clean ceramic bowl.
- Flexible impeller flush pump.
- Permanent magnet type motor, fully enclosed, with stainless steel shaft.
- Built-in back flow preventer.
- All corrosion resistant material for marine use.
- Wood seat with baked enamel finish for compact type only.
- Soft close seat for regular type only.




Electric Flush Pump
SFMTPI-01 (12 V) / SFMTP2-01 (24 V)

Color Box



Switch Panel **Compact**

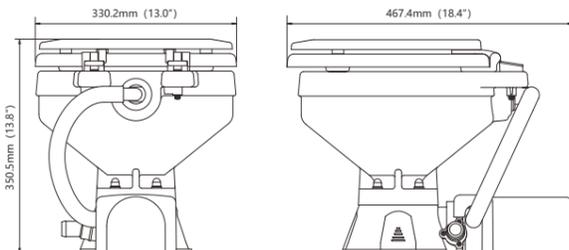

Model	Color	Features	Voltage	Max Draw	Diameter	Size	Type	Material
SFMT1-01	White	Built In Macerator	12 V	20 A	3/4" Inlet 1" Discharge	Household	Electric Impeller	Ceramic bowl, wood seat with baked enamel finish
SFMT2-01	White	Built In Macerator	24 V	10 A	3/4" Inlet 1" Discharge	Household	Electric Impeller	Ceramic bowl, wood seat with baked enamel finish

Electric Conversion Marine Toilet

The Electric flush pump provides the convenience of an electric head without having to modify the platform or replace the head. The self-priming pump rinses the bowl while the waste pump macerates and evacuates the waste. Add the luxury of an electric head without the costly replacement and hassle by converting your existing toilet with an electric flush kit.

FEATURES & BENEFITS

- Converts manual head to electric operation.
- Simple to operate.
- Suitable for use in above or below waterline installations.
- Built-in macerator with stainless steel chopper plate.
- Left and right-handed installations.
- Wood seat with baked enamel finish for compact type only.
- Soft close seat for regular type only.




Electric Flush Pump
SFMTPI-02 (12 V) / SFMTP2-02 (24 V)

Color Box




Compact

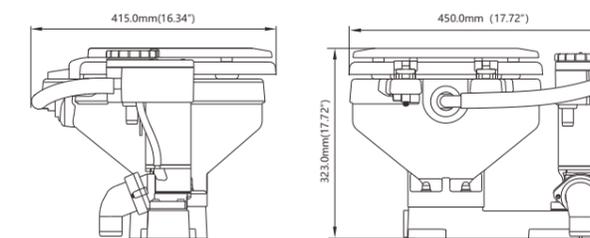

Model	Color	Features	Max Draw	Diameter	Size	Type	Material
SFMT1-02	White	Built In Macerator	24 A	3/4" Inlet 1 1/2" Discharge	Compact	12 Volt Electric Impeller	Ceramic bowl, wood seat with baked enamel finish
SFMT2-02	White	Built In Macerator	13 A	3/4" Inlet 1 1/2" Discharge	Compact	24 Volt Electric Impeller	Ceramic bowl, wood seat with baked enamel finish




Switch Panel **Regular**

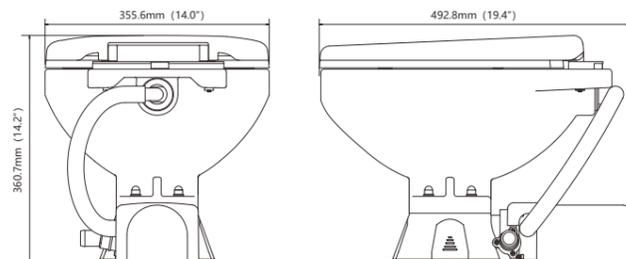

Model	Color	Features	Voltage	Max Draw	Diameter	Size	Type	Material
SFMT1-01-R	White	Built In Macerator	12 V	20 A	3/4" Inlet 1" Discharge	Household	Electric Impeller	Ceramic bowl, soft close seat
SFMT2-01-R	White	Built In Macerator	24 V	10 A	3/4" Inlet 1" Discharge	Household	Electric Impeller	Ceramic bowl, soft close seat



Regular

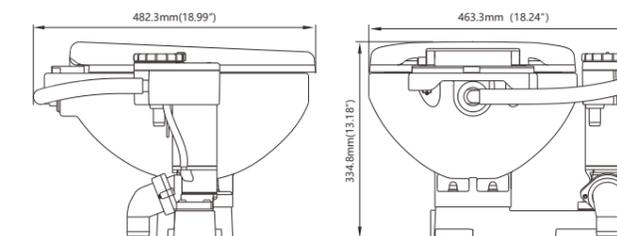

Model	Color	Features	Max Draw	Diameter	Size	Type	Material
SFMT1-02-R	White	Built In Macerator	24 A	3/4" Inlet 1 1/2" Discharge	Regular	12 Volt Electric Impeller	Ceramic bowl, Soft close seat
SFMT2-02-R	White	Built In Macerator	13 A	3/4" Inlet 1 1/2" Discharge	Regular	24 Volt Electric Impeller	Ceramic bowl, Soft close seat

Quiet Flush Electric Toilet - Fresh Water

Designed to radically reduce noise levels, Quiet Flush Toilets make life onboard more comfortable for all crew members, even those sleeping! Can be connected to the vessel's existing pressurized water system for flushing with fresh water. Very quiet flush cycle, one-touch button to solve your sewage troubles.

FEATURES & BENEFITS

- Very quiet flush cycle - like a household toilet
- Single button flush actuator - with dual function water level control switch
- Can be plumbed to any pressurized water system that can provide a 3-1/2 GPM (13.5 LPM) flow rate
- Water control solenoid valve with anti-siphon breaker to prevent contamination of potable water supply
- White vitreous china bowl available in compact or comfortable household size
- Built in upgraded macerator pump makes flushing quieter
- All spare parts can be ordered individually
- All corrosion resistant material for marine use

NEW




Electric Flush Pump
SFMTP1-04 (12 V)
SFMTP2-04 (24 V)





Bowl Can Be Rotated 90°
For Mounting In Confined Spaces



Soft Close Seat Regular Only

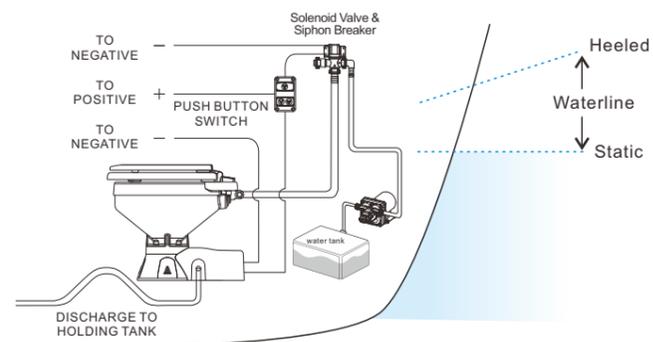



Compact

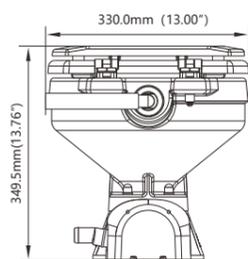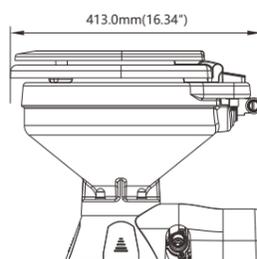

Model	Voltage	Max Draw	Port	Size	Material	Features	Dimension(L*W*H)
SFMTE1-03	12V	16V	Inlet 3/4" Hose Barb Outlet 1" Hose Barb	Compact	Ceramic bowl, wood seat with baked enamel finish	Built in macerator	414X330X350mm 16.29"x12.99"x13.78"
SFMTE2-03	24A	8A					



Regular

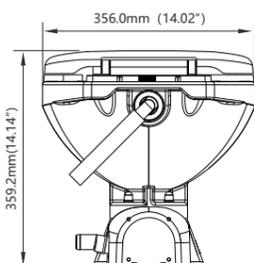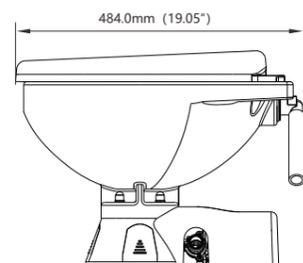

Model	Voltage	Max Draw	Port	Size	Material	Features	Dimension(L*W*H)
SFMTE1-03-R	12V	16V	Inlet 3/4" Hose Barb Outlet 1" Hose Barb	Regular	Ceramic bowl, soft close seat	Built in macerator	470X356X355mm 18.50"x14.01"x13.97"
SFMTE2-03-R	24A	8A					

Quiet Flush Electric Toilet - Sea Water

Designed to radically reduce noise levels, Quiet Flush Toilets make life onboard more comfortable for all crew members, even those sleeping! Can be connected to the vessel's existing pressurized water system for flushing with fresh water. Very quiet flush cycle, available in regular and compact versions, water control solenoid valve with anti-siphon breaker to prevent contamination of the potable water supply. Equipped with a powerful sewage pump to break down waste and empty the toilet. With the one-button button on the switch panel, you can solve your sewage troubles.

FEATURES & BENEFITS

- Very quiet flush cycle - like a household toilet
- Single button flush actuator - with dual function water level control switch
- Supplied with SEAFLO seawater rinse pump to provide sea water or lake water to rinse the toilet bowl
- White vitreous china bowl available in compact or comfortable household size
- Built in upgraded macerator pump makes flushing quieter
- All spare parts can be ordered individually
- All corrosion resistant material for marine use

NEW




Electric Flush Pump
SFMTP1-04 (12 V)
SFMTP2-04 (24 V)





Bowl Can Be Rotated 90°
For Mounting In Confined Spaces



Soft Close Seat Regular Only

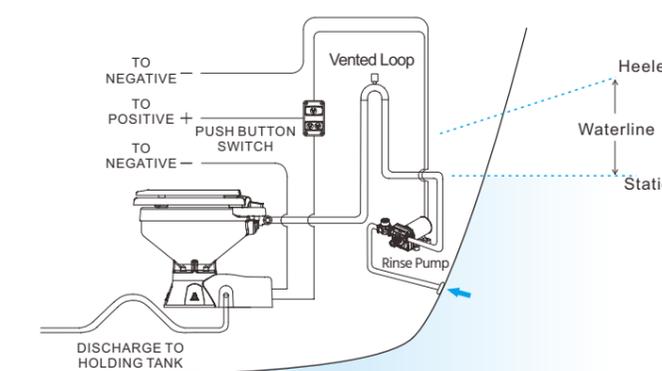



Compact

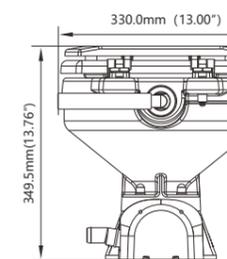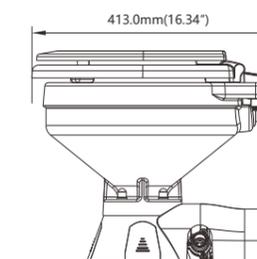

Model	Voltage	Max Draw	Port	Size	Material	Features	Dimension(L*W*H)
SFMTE1-04	12V	16V	Inlet 3/4" Hose Barb Outlet 1" Hose Barb	Compact	Ceramic bowl, wood seat with baked enamel finish	Built in macerator	414X330X350mm 16.29"x12.99"x13.78"
SFMTE2-04	24A	8A					



Regular

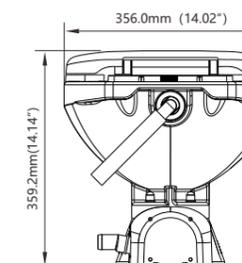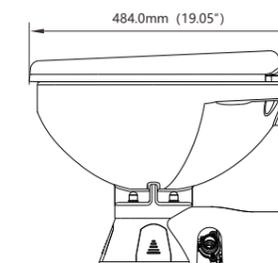

Model	Voltage	Max Draw	Port	Size	Material	Features	Dimension(L*W*H)
SFMTE1-04-R	12V	16V	Inlet 3/4" Hose Barb Outlet 1" Hose Barb	Regular	Ceramic bowl, soft close seat	Built in macerator	470X356X355mm 18.50"x14.01"x13.97"
SFMTE2-04-R	24A	8A					

Deluxe Flush Electric Toilets


SEAFLO Deluxe Flush Electric Toilets feature low noise levels, so sleeping guests will not be disturbed when the toilet is used. There are options of either flushing with fresh water from the boat's own supply or with salt, river or lake water from outside the boat. All plumbing and wiring easily concealed.

FEATURES & BENEFITS

- Modern design, clean, sleek look and compliment with different styles
- Very quiet flush cycle - like a household toilet
- Low water consumption Unmatched rinsing capabilities
- Single button flush actuator - with dual function water level control switch
- Designed to be used with fresh and seawater.
- All plumbing and wiring easily concealed
- High capacity waste macerator and bowl discharge pump
- All spare parts can be ordered individually
- Ignition Protection



All plumbing and wiring easily concealed High capacity bowl discharge pump makes toilet flushing quieter Easy to clean ceramic bowl Inlet 3/4" Hose Barb Outlet 1 1/2" Hose Barb

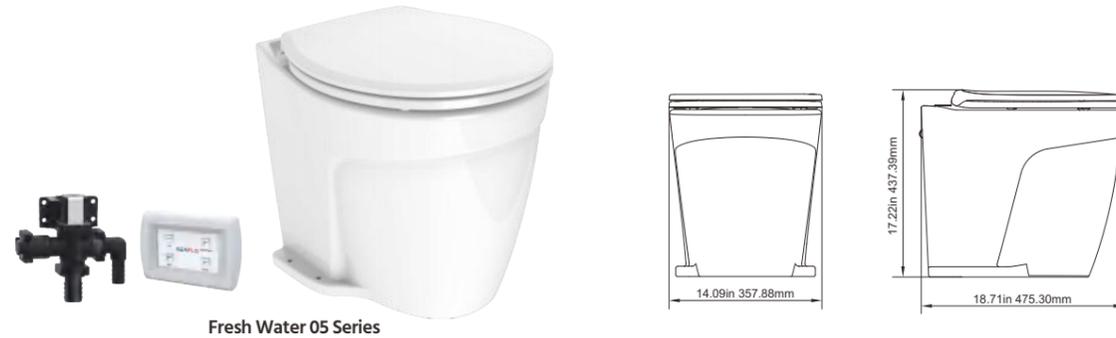

Model	Voltage	Max Draw	Port	Material	Features	Box Dimension (L*W*H)
SFMTE1-05	12V	20A	Inlet 3/4" Hose Barb Outlet 1 1/2" Hose Barb	Ceramic bowl, soft close seat	Built in macerator	475X358X437 mm 18.7"x14.09"x17.2"
SFMTE2-05	24V	10A				



Model	Voltage	Max Draw	Port	Material	Features	Box Dimension (L*W*H)
SFMTE1-06	12V	20A	Inlet 3/4" Hose Barb Outlet 1 1/2" Hose Barb	Ceramic bowl, soft close seat	Built in macerator	475X358X437 mm 18.7"x14.09"x17.2"
SFMTE2-06	24V	10A				

Deluxe Flush Electric Toilets-Smart Flushing

SEAFLO Deluxe Flush Electric Toilets feature low noise levels, so sleeping guests will not be disturbed when the toilet is used. There are options of either flushing with fresh water from the boat's own supply or with salt, river or lake water from outside the boat. Equipped with a smart toilet seat, rotate the knob to start rear cleaning or feminine cleaning mode. Smart toilet seats provide effective, hygienic bum care while saving you money and protecting the environment.

FEATURES & BENEFITS

- Equipped with a smart toilet seat, rotate the knob to start rear cleaning or feminine cleaning mode.
- Very quiet flush cycle - like a household toilet
- Low water consumption, Unmatched rinsing capabilities
- Single button flush actuator - with dual function water level control switch
- Designed to be used with fresh and seawater.
- All plumbing and wiring easily concealed
- High capacity waste macerator and bowl discharge pump
- All spare parts can be ordered individually
- Ignition Protection



Rotary knob for easy control Rotate the knob to start Rear cleaning or Feminine cleaning mode Extendable antibacterial rinse nozzle Adjustable cleaning intensity for a more comfortable cleaning experience Smart Flushing Cover and Kit Electric Flush Pump SFMTP1-05 (12V) / SFMTP2-05 (24V)



Model	Voltage	Max Draw	Port	Material	Features	Box Dimension (L*W*H)
SFMTE1-07	12V	20A	Inlet 3/4" Hose Barb Outlet 1 1/2" Hose Barb	Ceramic bowl, soft close seat	Built in macerator, smart flushing kit	475X358X437 mm 18.7"x14.09"x17.2"
SFMTE2-07	24V	10A				



Model	Voltage	Max Draw	Port	Material	Features	Box Dimension (L*W*H)
SFMTE1-08	12V	20A	Inlet 3/4" Hose Barb Outlet 1 1/2" Hose Barb	Ceramic bowl, soft close seat	Built in macerator, smart flushing kit	475X358X437 mm 18.7"x14.09"x17.2"
SFMTE2-08	24V	10A				

Manually Operated Marine Toilet Pump

FEATURES & BENEFITS

- Directly replaces electric pump assembly
- Easy to install
- Simple to operate
- Fits both SEAFLO manual and electric toilet
- Suitable for use in above or below waterline installations



Model	Control Type	Diameter	Dimension
SFMTMP-03	Twist 'n' Lock	3/4" Inlet 1-1/2" Discharge	11.8"*7.5"*4.7"

Electric Conversion for Manual Toilets

FEATURES & BENEFITS

- Directly replaces manual pump assembly
- Easy to install
- Simple to operate
- Dual action control allows water level to be varied
- Fits both SEAFLO manual and electric toilet
- Suitable for use in above or below waterline installations
- Built-in macerator with stainless steel chopper plate
- Self priming up to 0.6m(2ft)



Model	SFMTMP1-02	SFMTMP2-02
Voltage	12 V	24 V
Draw	20 A	10 A
Open Flow	5.0 GPM/18.9 LPM	
Dimension	11.8"*7.5"*4.7"	
Diameter	3/4" Inlet 1-1/2" Discharge	

Deluxe Electric Toilet Flush Pump

FEATURES & BENEFITS

- Standard accessory for Deluxe Electric Marine Toilet
- Makes the toilet flushing more quiet
- High Capacity Macerator and Bowl Scavenger Pump
- Fully Enclosed, with Stainless Steel Shaft
- Simply Operate by Pushing Button Switch
- Flexible Impeller Flush Pump
- All Corrosion Resistant Materials for Marine Use



Model	SFMTMP1-05	SFMTMP2-05
Voltage	12 V	24 V
Open Flow	53 GPM	200 LPM
AMPS	20 A	10 A
Fuse	25 A	15 A
Impeller	PA6+GF30%	

Flush Pump for Marine Toilet

FEATURES & BENEFITS

- High capacity macerator and bowl scavenger pump
- Flexible impeller flush pump
- Fully enclosed, with stainless steel shaft
- Simply operate by pushing button switch
- All corrosion resistant materials for marine use



Model	SFMTMP1-01	SFMTMP2-01
Voltage	12 V	24 V
Draw	20 A	10 A
Open Flow	5.0 GPM/18.9 LPM	
Dimension	9.1"*5.5"*4.7"	
Impeller	stainless steel	
Ports	0.78"	

Quiet Electric Toilet Flush Pump

FEATURES & BENEFITS

- Makes the toilet flushing more quiet
- High Capacity Macerator and Bowl Scavenger Pump
- Fully Enclosed, with Stainless Steel Shaft
- Simply Operate by Pushing Button Switch
- Flexible Impeller Flush Pump
- All Corrosion Resistant Materials for Marine Use




Model	SFMTMP1-04	SFMTMP2-04
Voltage	12 V	24 V
Draw	16 A	8 A
Open Flow	25 GPM/95 LPM	
Impeller	PPS+40%GF	
Ports	1"	

Vented Loops

An essential safety component on all inlet and discharge plumbing of toilets installed below the static or heeled waterline.

FEATURES & BENEFITS

- ensures water cannot siphon over plumbing loops.
- Internal valve avoids need for external venting
- Molded in tough, corrosion-proof plastic.
- Available in three sizes for 1-1/2" (38mm), 1" (25mm) and 3/4" (19mm) hose.

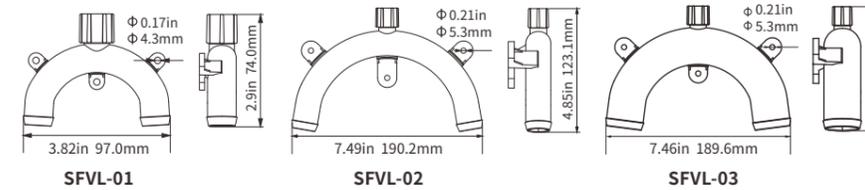


Model	Fitting
SFVL-01	3/4" (19mm)
SFVL-02	1" (25mm)
SFVL-03	1-1/2" (38mm)

Y-valve

Robust Y-Valve for use in toilet applications. Allows waste to be pumped overboard or into a holding tank.

FEATURES & BENEFITS

- Allows waste to be pumped directly into holding tank or diverted to another discharge.
- Ergonomically designed rotating port and handle
- Connections for two 1-1/2" (38mm) ports and 1" (25mm) inlet port
- Features a waste and corrosion resistant construction.

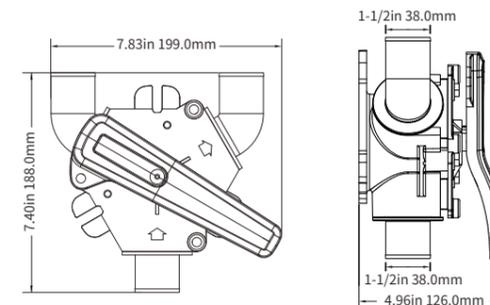


Model	Inlet	Outlet
SFYV-01	1" (25mm) or 1-1/2" (38mm)	1-1/2" (38mm)

Solenoid Valve & Siphon Breaker

FEATURES & BENEFITS

SEAFLO solenoid valve and syphon breaker assembly for connection to any existing pressurised water system capable of delivering 2.9gpm (11lpm) or more. The syphon breaker ensures that there is no backflow from the toilet into the water system.

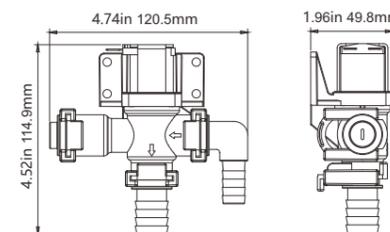


Model	Voltage	Power	Pressure
SFSV1-01	12V	9W	1-150 PSI
SFSV2-01	24V	9W	3-150 PSI

Rinse Pump For Marine Toilets

FEATURES & BENEFITS

- It is the standard spare part of SEAFLO quiet flush electric toilet - flushing pump
- Self priming, strong suction, suction lift up to 1.8m
- Run dry safe, max flow can reach 4.0gpm/15.0lpm
- Multiple sizes of quick-connect fittings and filters are available for easy connection to any outlet
- Quiet operation, bypass technology reduces cycling and reduces noise
- Semi-rigid rubber feet for noise reduction from vibration

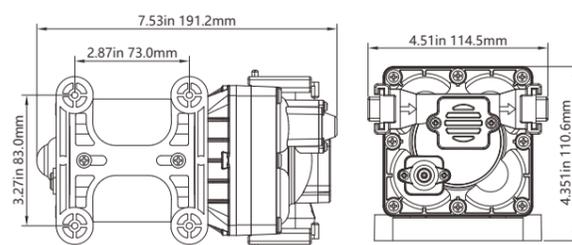

Standard Pump Configurations

Model	Voltage	GPM/LPM	PSI/BAR	Max Draw
SFDP1-040-050-43T	12 V	4.0/15.0	50/3.45	13 A
SFDP2-040-050-43T	24 V	4.0/15.0	50/3.45	7 A

Switch Panel

FEATURES & BENEFITS

- Genuine SEAFLO spare parts for quiet flush electric toilet.
- Switch control panel 12/24V for electric toilet.
- Three-way control panel allows the operator to select a normal flush and drain cycle, or to lower or raise the water level.




Model	Voltage	Fuse	Dimension
SFSP-015-03	12 V & 24 V	15 A	95 x 57 mm

Smart Switch Panel For Quiet Flush Toilets

A new multifunctional "one touch" control pad for marine toilet, One-button control of toilet flush cycle.

FEATURES & BENEFITS

- Specifically for the Deluxe Flush Marine Toilets
- It can be used with the Deluxe Flush and Quiet Flush marine Toilets
- 4 smart touch controls, 4-way flush control pannel
- Features 4 smart touch controls: "Fill", "Quick Flush", "Flush" and "Empty"
- DC 12v or 24v available

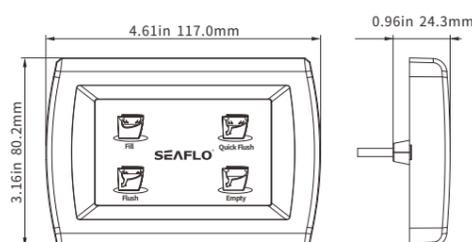

Model	Voltage	Amp Draw	Fuse/Breaker	Wire Gauge Size
SFSP-015-04	12V/24V DC	20A at 12V or 10A at 24V	25 amp at 12V or 15amp at 24V	14 AWG



Macerator Pump 01 Series

FEATURES & BENEFITS



- Completely new design
- Sealed motor
- Easy reach knob in case of clogs
- Run Dry for short periods of time
- New 4-blade design
- Thermally Protected
- Ignition Protected

PUMP

- **Liquid Temperature**
140 °F (60 °C) Max.
- **Power**
12 amps max current draw
- **Weight**
4.9 lbs (2.24 kg)

Inlet/Outlet Ports

- **Inlet:**
1.5" (39 mm) Hose Barb
1.5" (39 mm) Threaded Fitting
- **Outlet:**
1" Hose Barb

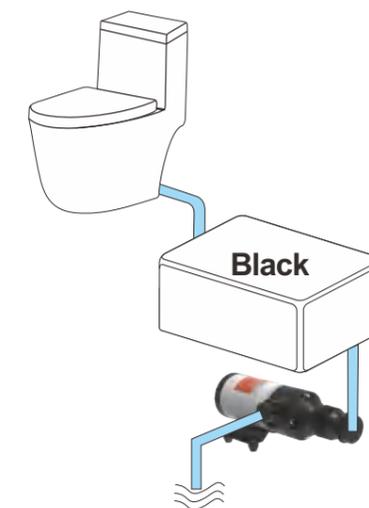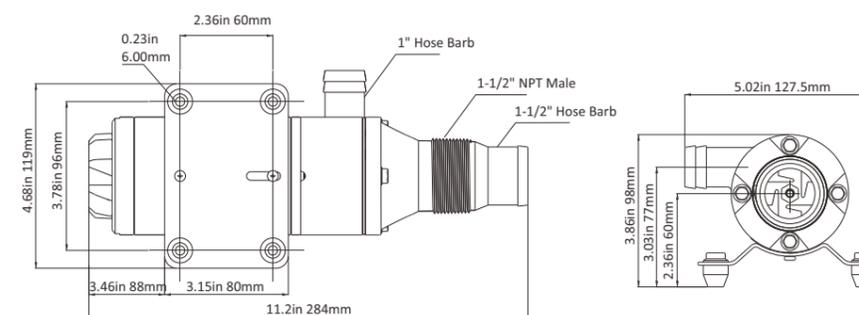

Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Ports	Lead	Molded	Max Draw(A)
SFMP1-120-01	12 V	12/45.0	Rubber & Aluminum	Inlet 1-1/2" Barb/1-1/2" NPT Outlet 1" Barb	Yes	N/A	12.0
SFMP2-120-01	24 V	12/45.0	Rubber & Aluminum	Inlet 1-1/2" Barb/1-1/2" NPT Outlet 1" Barb	Yes	N/A	6.0



Color Box

02 Series



Color Box

03 Series



Macerator Pump 02 Series

FEATURES & BENEFITS



- Fresh water rinse capabilities
- Connects directly to the RV waste outlet
- Impeller can be loosened with an end back knob
- Ability to dump longer distances
- Easy clean up and storage
- New four blades for reducing clogging
- With manual blending function for emergency

PUMP

- Liquid Temperature**
140 °F (60 °C) Max.
- Power**
12 amps max current draw
- Weight**
5.1 lbs (2.3 kg)

Inlet/Outlet Ports

- Inlet:
3" (75 mm) RV Connector
- Outlet:
1" Hose Barb

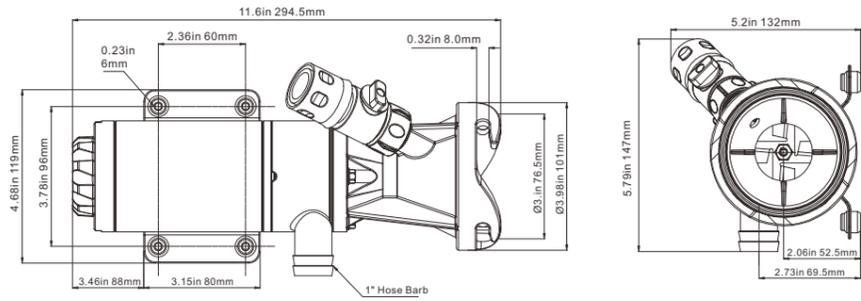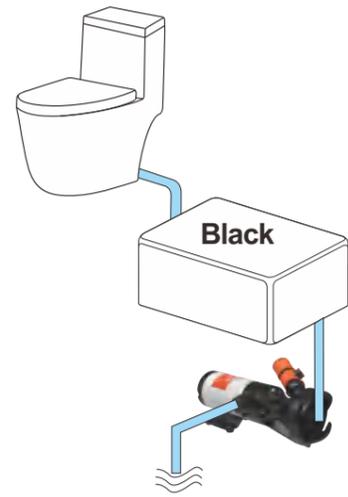

Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Ports	Max Draw(A)
SFMP1-120-02	12 V	12/45.0	Rubber & Copper	3" (75 mm) RV Connector 1" Hose Barb	12.0
SFMP2-120-02	24 V	12/45.0	Rubber & Copper	3" (75 mm) RV Connector 1" Hose Barb	7.0

Macerator Pump 03 Series

FEATURES & BENEFITS

- Connects directly to the RV waste outlet
- Garden hose discharge port
- Fresh water rinse capabilities
- Remote hand held on/off switch
- Ability to dump longer distances
- Ability to drain holding tanks at home
- Water inlet isolation cover to isolate odor
- Ignition protection



PUMP

- Liquid Temperature**
140 °F (60 °C) Max.
- Power**
15 amps max current draw
- Weight**
5.1 lbs (2.3 kg)

Inlet/Outlet Ports

- Inlet:
3/4" MNPT
- Outlet:
3/4" MNPT

Accessories

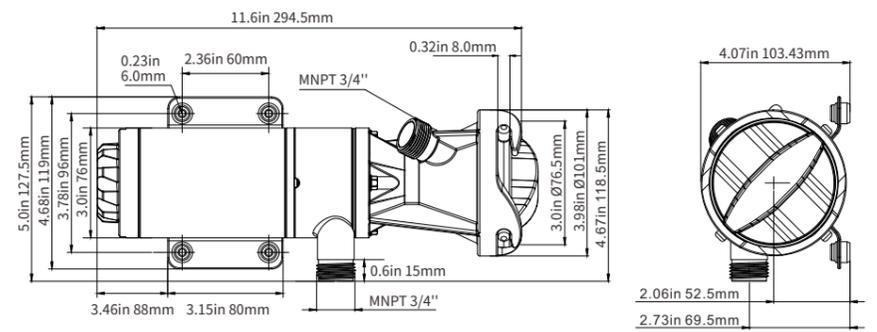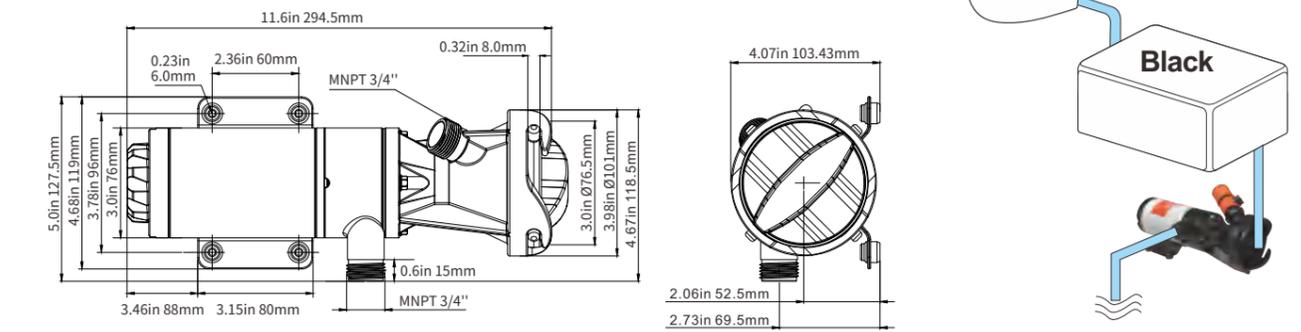

Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Ports	Max Draw(A)
SFMP1-120-03	12 V	12/45.0	Rubber & Copper	3/4" MNPT	15.0
SFMP2-120-03	24 V	12/45.0	Rubber & Copper	3/4" MNPT	7.0




Portable Macerator Pump Kit

FEATURES & BENEFITS



- Connects directly to the RV waste outlet
- Garden hose discharge port
- Fresh water rinse capabilities
- Remote hand held on/off switch
- Ability to dump longer distances
- Ability to drain holding tanks at home
- Easy clean up and storage
- Rugged portable storage case
- Water inlet isolation cover to isolate odor
- Ignition protection

PUMP

- Liquid Temperature**
140 °F (60 °C) Max.
- Power**
12 amps max current draw

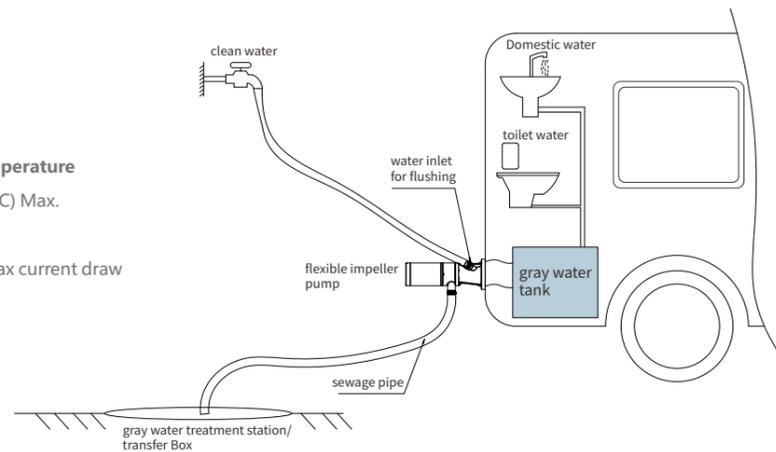

Accessories

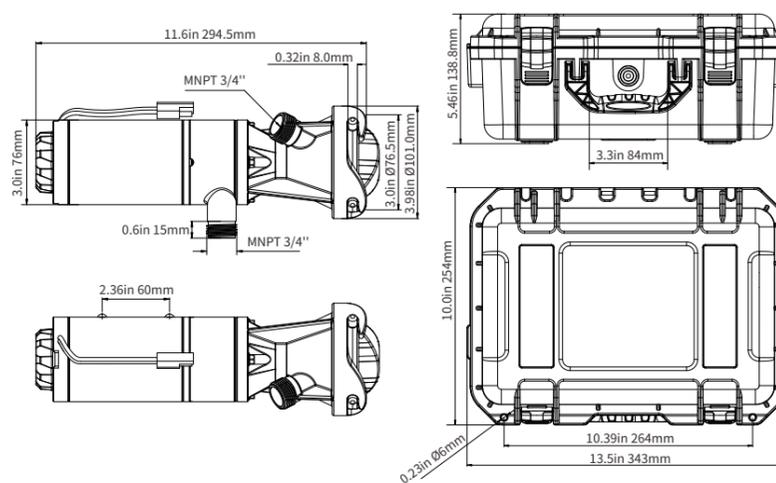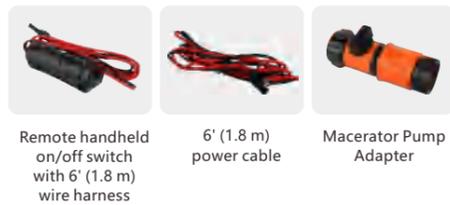


Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Ports	Max Draw(A)
SFMP1-120-04	12 V	12/45.0	Rubber & Copper	3" (75 mm) RV Connector 3/4" MNPT	15.0
SFMP2-120-04	24 V	12/45.0	Rubber & Copper	3" (75 mm) RV Connector 3/4" MNPT	7.0




Diaphragm Waste Pump

FEATURES & BENEFITS

- Single diaphragm pump designed
- Uses multi-positional ports for easy mounting of the pump
- Flow up to 19 lpm (5 US gpm)
- Self-priming to 3m (9.5ft), dry run capability
- Connections for 38mm (1-1/2") ports
- No filter required
- Double outlet valves to ensure continuous flow
- The waste pump head assembly to be rotated 360° to accommodate plumbing

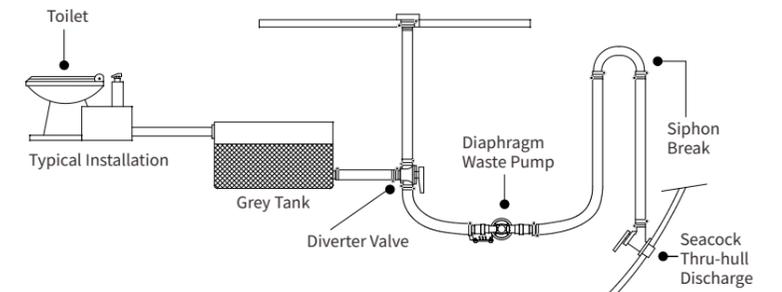

Optional Accessory

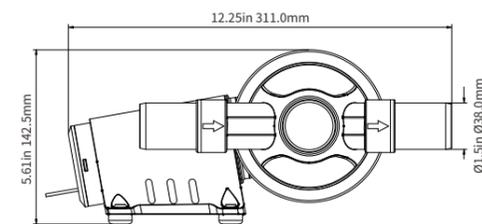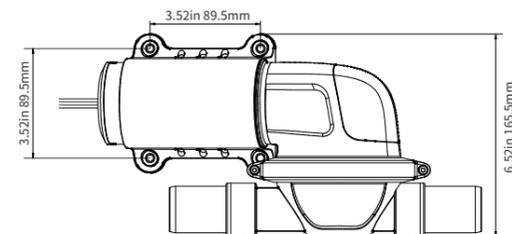

360° rotating head for flexible installation



Standard Pump Configurations

Model	Voltage	GPM/LPM	Max Draw(A)	Suction lift	Port
SFDWP1-050-01	12 V	5.0/19.0	8A	3m (9.5ft)	38mm (1-1/2")
SFDWP2-050-01	24 V	5.0/19.0	2.5A	3m (9.5ft)	38mm (1-1/2")


External Shower

SEAFLO External Shower Box is made of UV stabilized PP, which is with lock and keys. The box is durable, impact & fade resistant.

FEATURES & BENEFITS


- Made of UV stabilized PP, With lock and keys
- Durable, impact & fade resistant
- Choose from black or white

01 Series

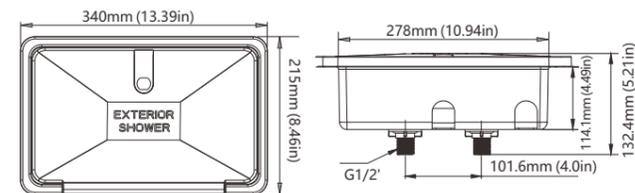

Model	Color
SFES1-01	White
SFES2-01	Black

02 Series

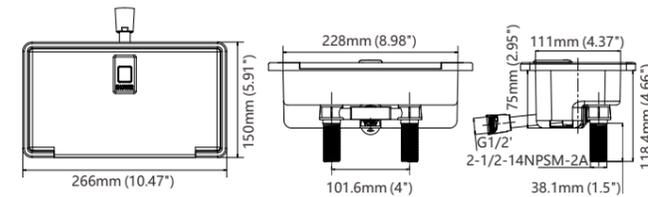

Model	Color
SFES1-02	White
SFES2-02	Black

Shower Head And Hose Kit

FEATURES & BENEFITS

- ABS plastic shower head
- 1.5 m/5 feet PVC Hose
- Two function spray setting
- UV protected, fade resistant
- With flat gasket
- Compatible to SEAFLO handheld shower kit



Model	Color	Model	Color	Model	Color
SF-SHHK001	White	SFHK1-01	White	SFHK1-02	White

Pvc Waste Valve

SEAFLO PVC Waste Valve is used on sewer line in kitchen, bath room, washing sink to prevent bad smell come into internal of RV.

FEATURES & BENEFITS

- PVC size is 2"
- Vertical mounting position
- EPDM seal for resistance to water and oils
- PVC construction for strength and resistance to corrosion and mild chemicals

Model	Color
SFWV1-01	White
SFWV2-01	Black



Fold-up Adjustable Drink Holder


SEAFLO Fold-Up Adjustable Drink Holder for RVs, cars, trucks, boats, cans etc, help prevent spills and mounts quickly and easily. This holder features arms that easily adjust to hold almost any size bottle, can or mug. Folds up for compact storage. It easily mounts with tapes or screws.

FEATURES & BENEFITS

- Easily adjust to hold almost any size bottle, can or mug
- Mounts with tapes or screws
- Folds up for compact storage



Model	Size	Color
SFTS1-01	98.3 * 95 * 97.7 mm	White
SFTS2-01	98.3 * 95 * 97.7 mm	Black

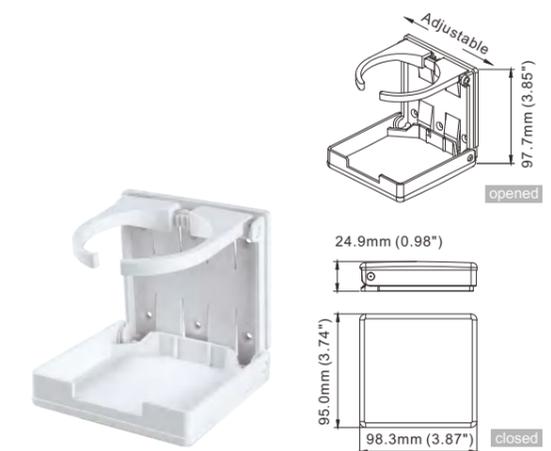

Round Louver Air Vent

SEAFLO Round Louver air vent is made of high quality ABS, Diameter 77.8 mm, ducting height 69.5 mm, Wall mounted or ceiling mounted, perfect for RV, boat or room exhaust and ventilation use.

FEATURES & BENEFITS

- 69.5 mm Ducting Fitting Size
- High-Quality ABS Plastic
- Simple To Fit
- Designed To Cover Wall Or Ceiling Openings And Ducting Vents




Model	Size	Color
SFAV1-01	93.5 * 93.5 * 69.5 mm	White
SFAV2-01	93.5 * 93.5 * 69.5 mm	Black



Plumbing Vent

SEAFLO Plumbing Vent is made of PP and it fits up to a 2 inch diameter with 2-1/2 Inch projection vent pipes. A top cap is included, which can be locked on or removed with a twist of the wrist without the need of tools.

Model	Size	Color
SFPV1-01	5.3"*2.8"(134.5 * 71.5 mm)	White
SFPV2-01	5.3"*2.8"(134.5 * 71.5 mm)	Black

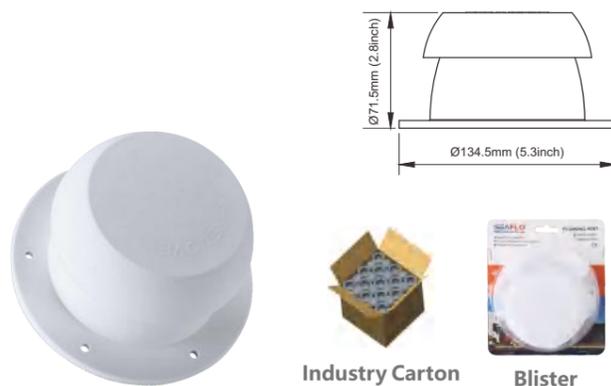


Vent Cover

SEAFLO Vent Cover is made of UV stabilized PP, which is very easy to be installed. There are up to two blades that can be adjusted to change the air flow. Also two of blades can be detached to get a largest air flow.

FEATURES & BENEFITS

Made of UV resistant PP
Air flow can be adjusted by blades
Blades are removable
Easy to install

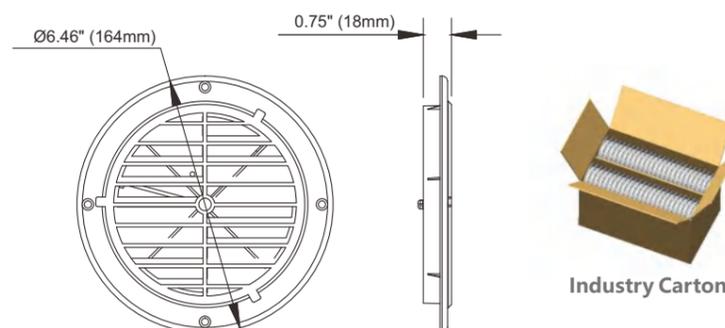

Model	Blade	Color
SFVC1-01	0	White
SFVC2-01	0	Black

Model	Blade	Color
SFVC1-02	2	White
SFVC2-02	2	Black

Water Inlet


SEAFLO Water Inlet is used for fresh water system and it is constructed with UV stabilized plastic. There are a check valve inside and different model have different features.

Water Inlet Pressure Reducing Valve

NEW

FEATURES & BENEFITS

Continuous protection from high pressure surges
Constructed With Uv Stabilized Plastic
Quick, permanent wall mount installation
Fits standard hose fittings
Built In Check Valve
Outlet Pressure: 50psi
Inlet Pressure: 125psi Max

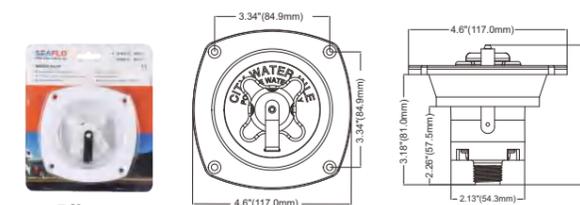


Model	Description	Color
SFWI1-04	Water Inlet	White
SFWI2-04	Water Inlet	Black
SFWI3-04	Water Inlet	Chrome

Water Inlet-01

FEATURES & BENEFITS

Constructed with UV stabilized plastic
Fits standard hose fittings
Built in check valve
Brass pipe threads
Quick, permanent wall mount installation

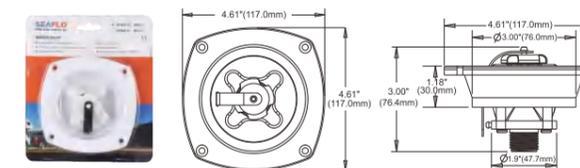


Model	Description	Color
SFWI1-01	Water Inlet	White
SFWI2-01	Water Inlet	Black

Water Inlet With Lock-02

FEATURES & BENEFITS

With 2 Keys & Lock
1/2" air vent for a fast fill
Design for filling the water holding tank with gravity
Constructed with UV stabilized Plastic

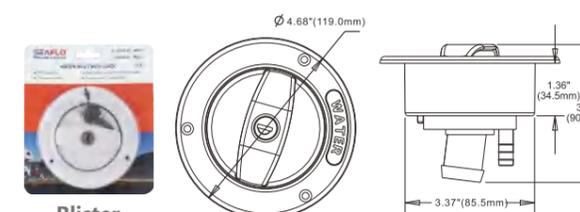


Model	Description	Color
SFWI1-02	Water Inlet With Lock	White
SFWI2-02	Water Inlet With Lock	Black

Plastic Water Inlet-03

FEATURES & BENEFITS



Constructed with plastic
Can fit into SEAFLO water inlet hatch
1/2" BSP and G1/2 thread
Built in check valve

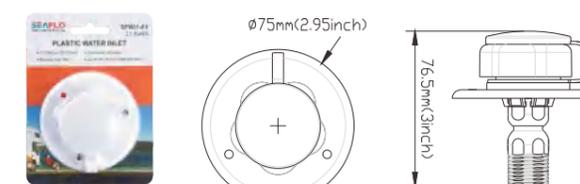

Model	Description	Color
SFWI1-03	Plastic Water Inlet	White
SFWI2-03	Plastic Water Inlet	Black

Water Inlet Hatch


SEAFLO Water Inlet Hatch is made of UV stabilized ABS with robust reinforcement. They have a 1/2 inch air vent for a fast fill and lockable hatch with 2 keys. Also installation screw and putty type are included.

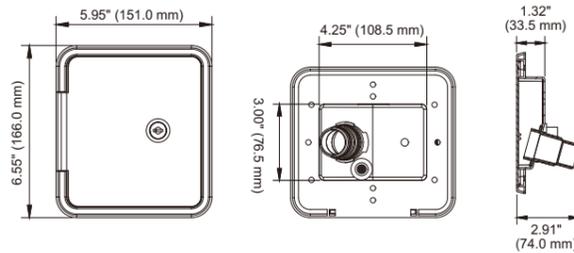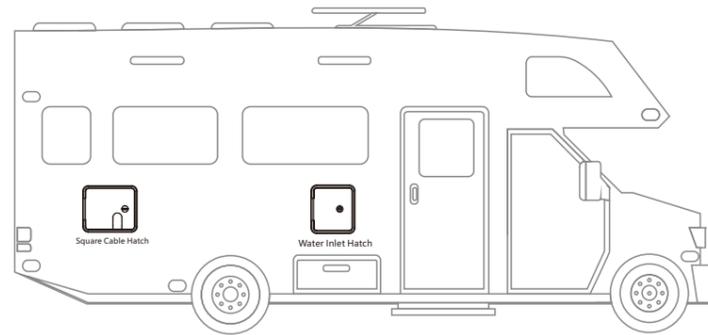

Blister

Technical Data

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-151-166-01	5.94*(151mm)	6.54*(166mm)	4.27*(108.5mm)	3.01*(76.5mm)	White
SFWH2-151-166-01	5.94*(151mm)	6.54*(166mm)	4.27*(108.5mm)	3.01*(76.5mm)	Black

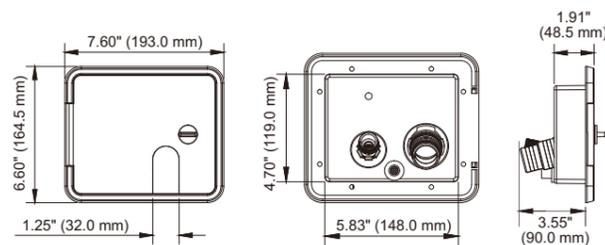

Blister

Technical Data

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFWH1-193-164-02	7.60*(193mm)	6.48*(164.5mm)	5.83*(148mm)	4.69*(119mm)	White
SFWH2-193-164-02	7.60*(193mm)	6.48*(164.5mm)	5.83*(148mm)	4.69*(119mm)	Black

Dent Vent

SEAFLO Dent Vent is use for a quick and easy way to repair the minor damage of boat body and keep the original look; which are made of UV stabilized plastic and combine multiple vents to cover larger damage areas.


FEATURES & BENEFITS

- Keep the original look
- Made of UV resistant ABS
- There are 3 sizes available
- A quick and easy way to repair the minor damage of boat body
- Save expensive maintenance costs
- Combine multiple vents to cover larger damage areas

Damage of boat body



Repair damage and keep original look

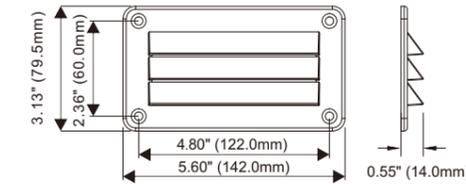


Blister



Industry Carton

Model	L	H	Color
SFDV1-140-79-01	5.60*(142.0mm)	3.13*(79.5mm)	White
SFDV2-140-79-01	5.60*(142.0mm)	3.13*(79.5mm)	Black

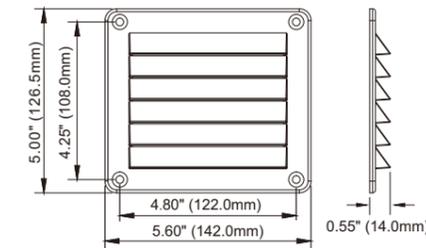


Blister



Industry Carton

Model	L	H	Color
SFDV1-140-125-02	5.60*(142.0mm)	5.00*(126.5mm)	White
SFDV2-140-125-02	5.60*(142.0mm)	5.00*(126.5mm)	Black

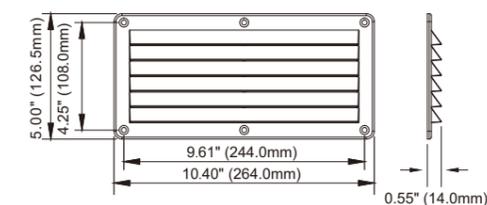

Blister




Industry Carton


Model	L	H	Color
SFDV1-260-125-03	10.40*(264.0mm)	5.00*(126.5mm)	White
SFDV2-260-125-03	10.40*(264.0mm)	5.00*(126.5mm)	Black

Square Cable Hatch

SEAFLO Square Cable Hatch is for use with RV electrical cables, and it is constructed with UV stabilized ABS. Hatch comes with 2 keys and the hatch door has slide window for door closure while hooked up.

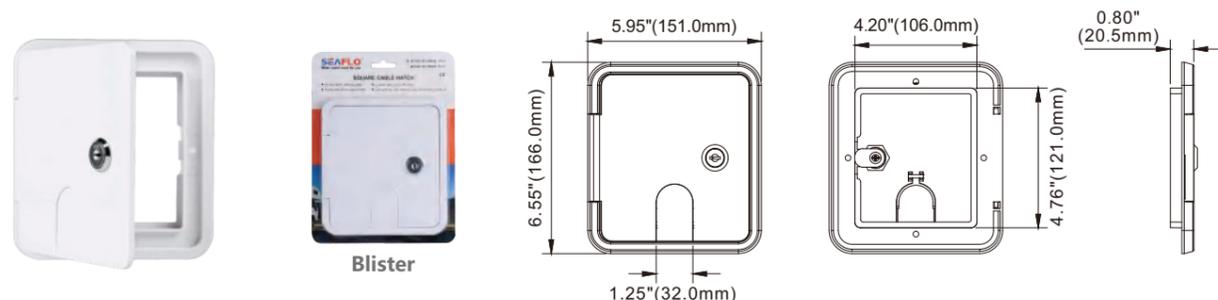

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFCH1-151-166-01	5.94*(151mm)	6.54*(166mm)	4.17*(106mm)	4.76*(121mm)	White
SFCH2-151-166-01	5.94*(151mm)	6.54*(166mm)	4.17*(106mm)	4.76*(121mm)	Black

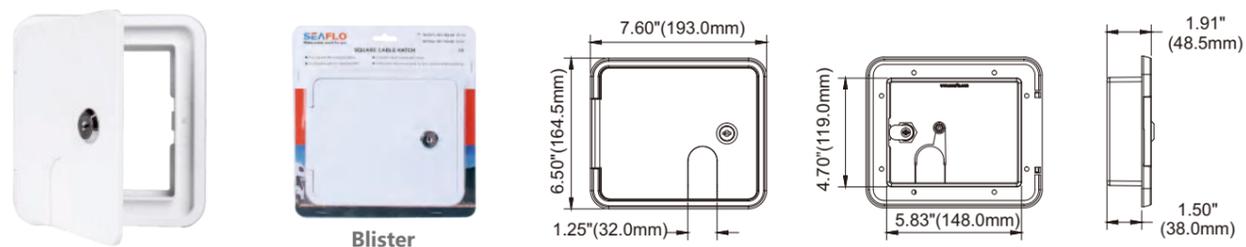

Model	L1(mm)	W1(mm)	L2(mm)	W2(mm)	Color
SFCH1-193-164-02	7.60*(193mm)	6.48*(164.5mm)	5.83*(148mm)	4.69*(119mm)	White
SFCH2-193-164-02	7.60*(193mm)	6.48*(164.5mm)	5.83*(148mm)	4.69*(119mm)	Black

Round Cable Hatch

SEAFLO Round Cable Hatch is for use with RV electrical cables, and it is constructed with UV stabilized PP. Its hinge is extra heavy duty. It has a 5.2" round O.D. flange and a 2.6" deep cavity to hold the cable end.



Model	Out-Size	In-Size	Color
SFCH1-052-03	5.2" x 2.6" (130 x 66mm)	3.5" (88mm)	White
SFCH2-052-03	5.2" x 2.6" (130 x 66mm)	3.5" (88mm)	Black

Genuine Parts And Accessories



Thru Hull Fittings

Model	Size inch	H (mm)	D (mm)	D1 (mm)	d (mm)	d1 (mm)	di (mm)	Color
SFDS1-0625-01	5/8"	73.5	42.0	17.0	23.5	16.0	10.0	White
SFDS2-0625-01	5/8"	73.5	42.0	17.0	23.5	16.0	10.0	Black
SFDS1-0750-01	3/4"	80.0	50.5	19.0	27.0	19.0	11.5	White
SFDS2-0750-01	3/4"	80.0	50.5	19.0	27.0	19.0	11.5	Black
SFDS1-1000-01	1"	93.0	61.0	26.0	33.0	25.5	18.0	White
SFDS2-1000-01	1"	93.0	61.0	26.0	33.0	25.5	18.0	Black
SFDS1-1250-01	1-1/4"	97.0	67.5	33.0	41.0	32.0	24.0	White
SFDS2-1250-01	1-1/4"	97.0	67.5	33.0	41.0	32.0	24.0	Black
SFDS1-1500-01	1-1/2"	102.0	75.0	47.0	46.5	38.5	28.0	White
SFDS2-1500-01	1-1/2"	102.0	75.0	47.0	46.5	38.5	28.0	Black
SFDS1-1125-01	1-1/8"	94.0	64.0	23.7	31.8	28.5	25.6	White
SFDS2-1125-01	1-1/8"	94.0	64.0	23.7	31.8	28.5	25.6	Black
SFDS1-2000-01	2"	130.0	90.0	49.0	57.0	50.8	47.3	White
SFDS2-2000-01	2"	130.0	90.0	49.0	57.0	50.8	47.3	Black


Water Deck Filler Caps

Model	SFCW1-01	SFCW2-01
H (mm)	70	70
D (mm)	85	85
d (mm)	50	50
d1 (mm)	40	40
d2 (mm)	38	38
di (mm)	34	34
Color	white	black

Fuel Deck Filler Caps

Model	SFCF1-01	SFCF2-01
H (mm)	70	70
D (mm)	85	85
d (mm)	50	50
d1 (mm)	40	40
d2 (mm)	38	38
di (mm)	34	34
Color	white	black


Kraft Box

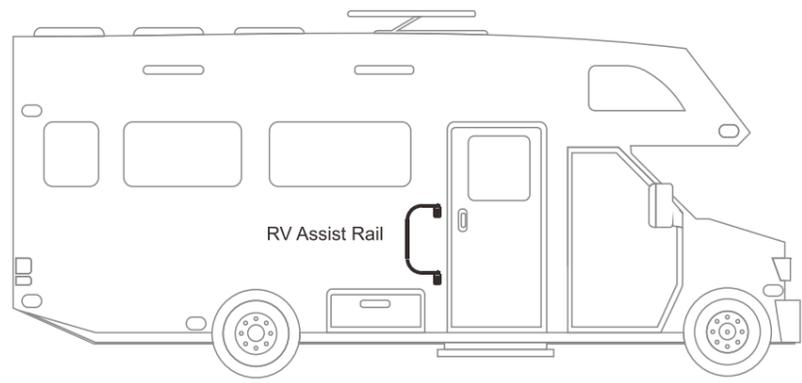

Rv Assist Rail Mini

FEATURES & BENEFITS

Provides a secure hold for entering and exiting your RV
Designed to help you keep and maintain your balance
Folds & locks to the side of your RV without tools
Locks open to make entering and exiting your RV easier
Available in white or black finishes with a black foam grip
Available in 22.05" and 26.73" length

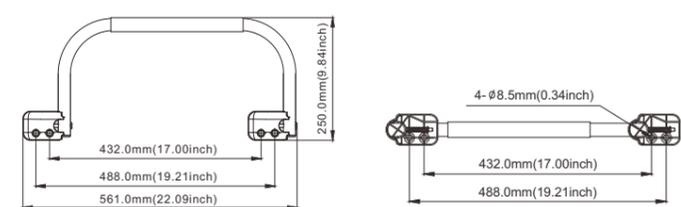


Model	Size	Color	Material
SFAR1-01	560mm*250mm*59.5mm	White	aluminum
SFAR2-01	560mm*250mm*59.5mm	Black	aluminum

Rv Assist Rail Standard

FEATURES & BENEFITS

Provides a secure hold for entering and exiting your RV
Designed to help you keep and maintain your balance
Folds & locks to the side of your RV without tools
Locks open to make entering and exiting your RV easier
Available in white or black finishes with a black foam grip
Available in 22.05" and 26.73" length

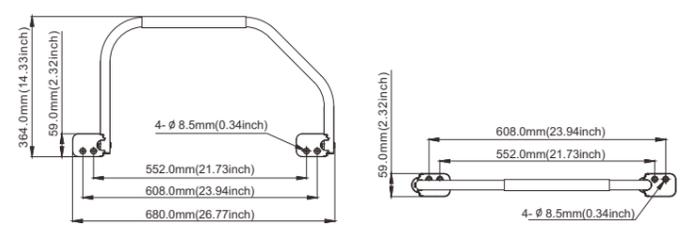


Model	Size	Color	Material
SFAR1-02	680mm*365mm*59.5mm	White	aluminum
SFAR2-02	680mm*365mm*59.5mm	Black	aluminum

Grab Handle

FEATURES & BENEFITS

SEAFLO Grab Handle designed for safety and convenience
Easy to install - Fits most RV's, Travel Trailer's, Fifth Wheel Trailers, Campers, Motor Home's, Cargo Trailers and Boats
Can be mounted vertically or horizontally

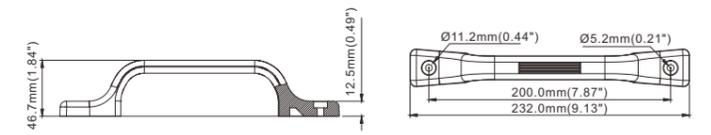


Model	Size	Color	Material
SFDK1-01	232mm*46.7mm*12.5mm	White	PA66
SFDK2-01	232mm*46.7mm*12.5mm	Black	PA66

Arch Assist Handle

FEATURES & BENEFITS

SEAFLO Arch Handle designed in clean styling, shaped to fit your hand for a secure grip
Easy to install - Fits most RV's, Travel Trailer's, Fifth Wheel Trailers, Campers, Motor Home's, Cargo Trailers and Boats
Made with All Weather Impact Resistant Polypropylene

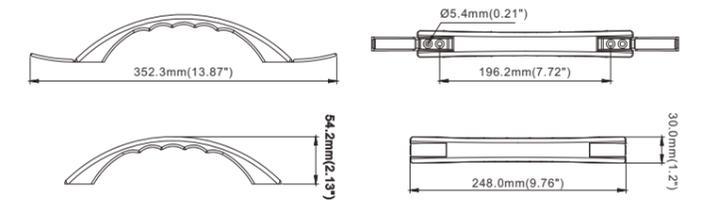


Model	Size	Color	Material
SFDK1-02	248mm*30mm*54.2mm	White	PP
SFDK2-02	248mm*30mm*54.2mm	Black	PP

Soft Touch Rv Hand Rail

FEATURES & BENEFITS

Provides traction and grip for your hand
Comfort grip for added stability and comfort
More user friendly than most manufacture hand rails

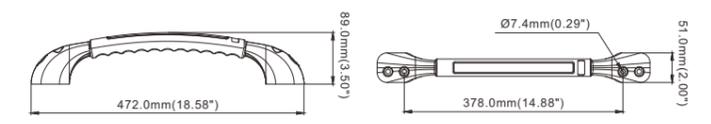

Model	Size	Material
SFDK1-03	472mm*51mm*89mm	ABS & TPE





Shower Head



SFSSH1-01
 Function: G1/2
 Color: White / Chrome



SFSSH1-02
 Function: G1/2
 Color: White / Black

Spray Gun



SFSG1-01
 Function: G1/2
 Color: White



SFSG1-02
 Function: G1/2
 Color: White



SFFT3-01
 Function: Cold and Hot
 Color: Chrome



SFFT4-01
 Function: Cold and Hot
 Color: Chrome



SFFT1-03
 Function: Single cold
 Color: Chrome



SFFT2-03
 Function: Cold and Hot
 Color: Chrome

● Raw Water
 ○ Purified Water

Faucet Series

FEATURES & BENEFITS

- Chrome finish
- Excellent material is not easy to rust
- High-quality spool is not easy to drip
- Adjustable hot and cold switch freely
- Easy to clean, anti-corrosion and wear-resistant
- Various sizes for you to choose



SFFT1-04
 Function: Single cold
 Color: Chrome



Pull-out faucet

SFFT1-05
 Function: Cold and Hot
 Color: Chrome



SFFT1-01
 Function: Single cold
 Color: Chrome



SFFT1-02
 Function: Single cold
 Color: Chrome



SFFT2-01
 Function: Cold and Hot
 Color: Chrome




SFFT2-02
 Function: Cold and Hot
 Color: Chrome

Leveling Blocks

FEATURES & BENEFITS


- 10 interlocking blocks stack to the desired height for customizable leveling
- Compatible with Tongue Jack Stand
- Safe and easy to use
- Strong and durable

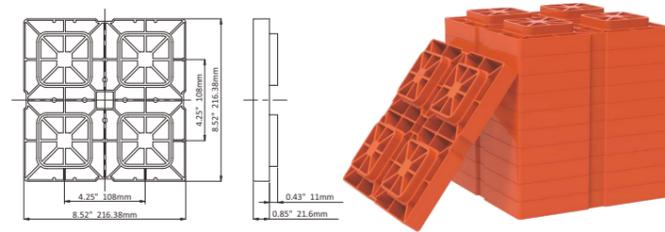

Model	Size (mm)	Color	Material
SFLB-05-01	216.38 * 216.38 * 32.6	Orange	PP
SFLB-10-01	216.38 * 216.38 * 32.6	Orange	PP

Rv Tongue Jack Stand

- Distributes weight evenly: evenly distributes the weight of your trailer tongue while providing stability and support
- Compatibility: fits between a 2-inch and 6-inch diameter tongue jack
- Versatile fit: interlocks with 5 leveling blocks
- Small and easy to store

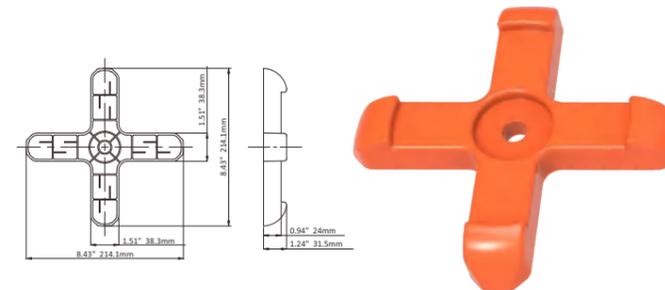

Model	Size (mm)	Color	Material
SFJS-01-01	214.1 * 214.1 * 31.5	Orange	PP
SFJS-05-01	214.1 * 214.1 * 31.5	Orange	PP

Plumbing System Cap

Elbow adapter fits 3" sewer hose



Model	Material	Diameter (cm)
SFPS-01	PP	10.85/11.5

Sewer Hose Swivel Adaptor

Connect sewer hose to your RV's waste valve fitting fits 3", 3-1/2" and 4" threaded dump-station pipes




Model	Material	Size (cm)
SFSHA-01	HDPE	15.24 * 21.08

Rv Sewer Hose Kit


FEATURES & BENEFITS

- Durable construction
- Easy to store: hose can be compressed for easier storage
- Features new pre-attached fittings that rotate 360 degrees
- Kit includes: sewer hose, swivel bayonet adapter and two storage caps
- Fittings swivel: for ease of use and detachable, designed to stay sealed

Model	Length	Pipe Material
SFSHK1-15-01	15ft/4.5m	PP
SFSHK1-20-01	20ft/6m	PP

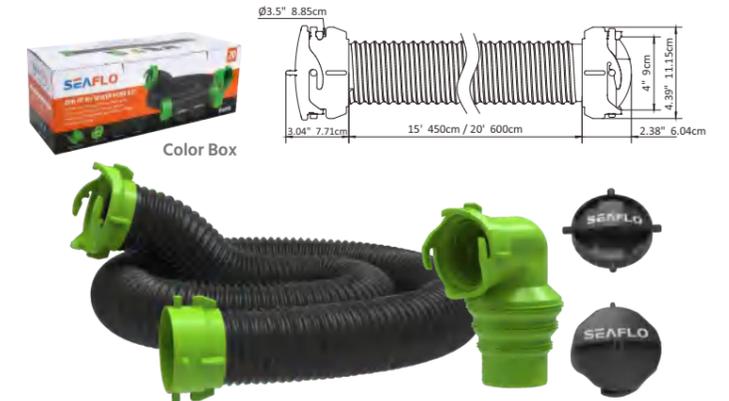


Model	Length	Pipe Material
SFSHK2-15-01	15ft/4.5m	TPE
SFSHK2-20-01	20ft/6m	TPE

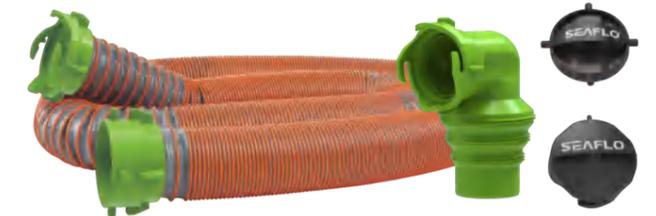


Rv Hose Support

FEATURES & BENEFITS

- Three tie down straps included
- Ready to use-no assembly required
- Curves around obstacles for better drainage
- Available with 20ft (6m) hose or 10ft (3m) hose
- Sturdy, lightweight plastic that won't creep closed-stays in place
- Self-fastening convenient straps keeps hose support closed for easy storage

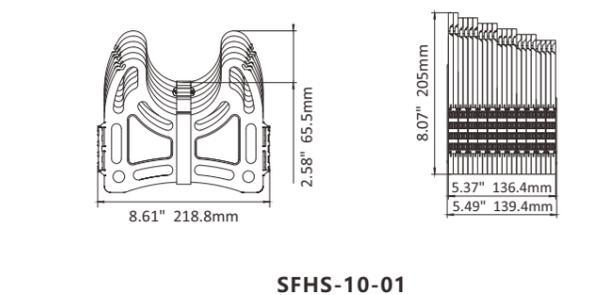

Model	Length	Size (cm)	Color
SFHS-10-01	10ft/3m	13.9*21.9*20.5	Black

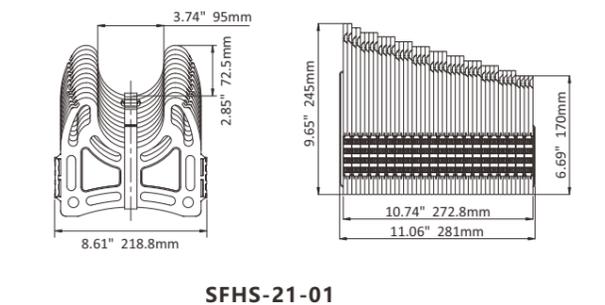

Model	Length	Size (cm)	Color
SFHS-21-01	21ft/6.5m	28.1 * 21.9 * 24.5	Black

Hatches

FEATURES & BENEFITS


- Inspection hatches with removable bag
- ABS/PP Anti-Aging, Ultraviolet Resistant
- Heavy Duty Lid with Non-Slip Surface
- Durable water resistant EVA seal
- Designed for vertical and horizontal applications
- Never turn yellow White hatch is made of PP
- Black hatch is made of ABS
- Engineered for the toughest marine elements
- Easy access, no tools required



Model	Size	Outside Dia	Inside Dia	Cut Out Dia	Material	Bag for storage
SFRH12-004-02A	4"	138 mm	96 mm	108 mm	PP	No
SFRH12-004-02B	4"	138 mm	96 mm	108 mm	PP	Yes




Model	Size	Outside Dia	Inside Dia	Cut Out Dia	Material	Bag for storage
SFRH12-006-02A	6"	197 mm	153 mm	166 mm	PP	No
SFRH12-006-02B	6"	197 mm	153 mm	166 mm	PP	Yes



Model	Size	Outside Dia	Inside Dia	Cut Out Dia	Material	Bag for storage
SFRH12-008-02A	8"	250 mm	204 mm	218 mm	PP	No
SFRH12-008-02B	8"	250 mm	204 mm	218 mm	PP	Yes

FEATURES & BENEFITS

- Inspection hatches with removable bag
- Heavy Duty Lid with Non-Slip Surface
- White/black deck plate with pull handle
- Durable water resistant EVA seal
- Designed for vertical and horizontal applications
- Hidden fastener design
- UV and weather resistant ABS/PP material
- Never turn yellow White hatch is made of PP
- Black hatch is made of ABS
- Engineered for the toughest marine elements
- Easy access, no tools required



Model	Size	Outside Dia	Inside Dia	Cut Out Dia	Material	Bag for storage
SFRH12-008-03A	8.4"	285 mm	214 mm	246 mm	PP	No
SFRH12-008-03B	8.4"	285 mm	214 mm	246 mm	PP	Yes

Hatches

- ABS Anti-aging, Anti-ultraviolet.
- 180° opening hatches.
- Easy 'click-in' construction.
- Corrosion free synthetic fittings and durable rubber seals.





Color Box



Kraft Box



Model	Size inch	d (mm)	D (mm)	Color
SFRH1-004-01	4	101	143	white
SFRH1-006-01	6	151	198	white
SFRH1-008-01	8	180	250	white

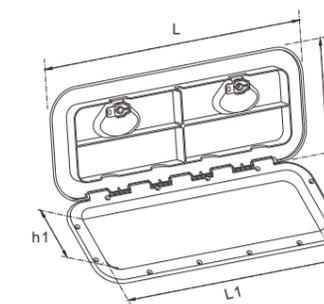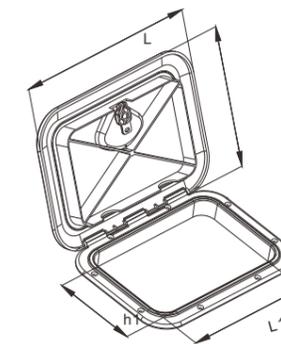

Model	H (mm)	L (mm)	h (mm)	L1 (mm)
SFRE1-270-375-01	270	375	192	291

Model	H (mm)	L (mm)	h (mm)	L1 (mm)
SFRE1-243-607-01	243	607	168	525
SFRE1-315-440-01	315	440	240	358
SFRE1-353-606-01	353	606	278	524
SFRE1-370-375-01	370	375	295	295
SFRE1-460-510-01	460	510	383	436



Portholes

4 mm thickness tempered glass.
ABS Anti-aging, Anti-ultraviolet.
Casted and polished 316 stainless steel accessories.
Easy 'click-in' construction.
Corrosion free synthetic fittings and durable rubber seals.



Color Box



Kraft Box



Model	Size (cm)	Color
SFPP1-01	21	white
SFPP2-01	21	black

Model	Size (cm)	Color
SFPP1-02	26	white
SFPP2-02	26	black



Model	Shape	Color
SFPP1-03	Oval shape porthole	white
SFPP2-03	Oval shape porthole	black

Model	Shape	Color
SFPP1-04	Rectangular shape porthole	white
SFPP2-04	Rectangular shape porthole	black

Gear pumps

FEATURES & BENEFITS

Perfect for pumping oil
Metal pump head
Metal gears
Sealed Motor Design
Thermally Protected Motor
Self-priming
Stainless Steel Shaft

PUMP

Liquid Temperature
140 °F (60 °C) Max.
Priming Capabilities
Not needed flooded suction
Power
10 amps max current draw
Max Pressure
Not needed
Inlet/Outlet Ports
3/8" FNPT (9.52 mm)
thread fitting
Weight
5.46 lbs (2.48 kg)

MOTOR

Type
High quality seamless design
that is thermally protected
Leads
Wire leads
Temperature Limits
140 °F (60 °C) Max.
Duty Cycle
Intermittent
Voltage
12 V/24 V



Gear




Standard Accessories



GPF001 GPF002
3/8" MNPT x 1/2" Barb

TYPICAL APPLICATIONS

Extreme duty
Transmission fluid transfer
Lubricant and viscous liquid transfer
Industrial use
Oil change pump

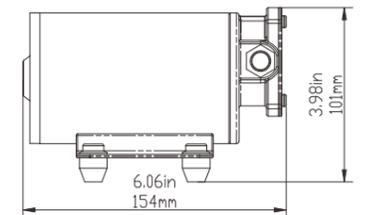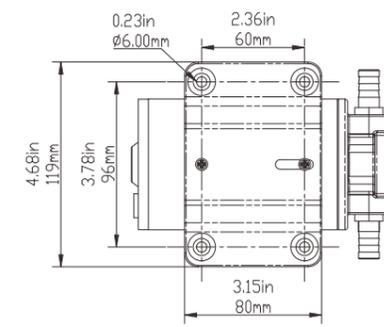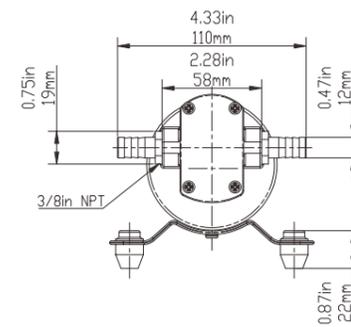

Standard Pump Configurations

Model	Voltage	GPM/LPM	Impeller	Ports	Lead	Molded	MaxDraw(A)
SFGP1-032-003-01	12 V	3.2/12.0	copper	3/8" FNPT	Yes	N/A	10
SFGP2-032-003-01	24 V	3.2/12.0	copper	3/8" FNPT	Yes	N/A	6

NEW



NEW



Oil Change System 01


SEAFLO oil change system includes premium pump with 6 feet (1.8m) cables, battery clips, hose kit and 3.7 gallon (14 L) storage bucket. Incorporating SEAFLO advanced motor technology that includes thermal overload protection, this Oil Change System is self-priming, easy to install and extremely versatile. System simplifies the engine oil changing process, perfect for changing engine oil in Boats, RV's, Lawn and Garden Equipment.

FEATURES & BENEFITS


- Self-contained oil change system
- Self-priming up to 5 feet (1.5m), run dry capable pump, thermal overload protection
- Battery clamp leads and on-off switch to make pumping process quick and simple
- Secured fully assembled 3.7 gallon (14 L) pail prevents wobble and spillage
- Vent hole can prevent the barrel from expanding and unable to pump oil
- Drain Spout for easy pouring
- No spilling and very portable, easy to empty and easy to carry
- Easy to operate - four easy steps to fast, clean oil




1 For quicker oil changes, start engine and run for 5 minutes to heat the oil.

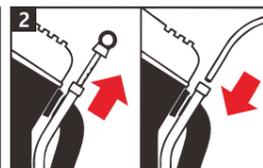

2 Remove the dipstick and insert the suction probe.

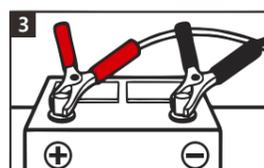


3 Attach the power cord clips to the engine's battery.

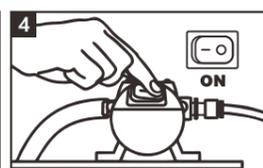

4 Activate pump with switch on motor to drain crankcase.

INSTALLATION DIMENSION DRAWING

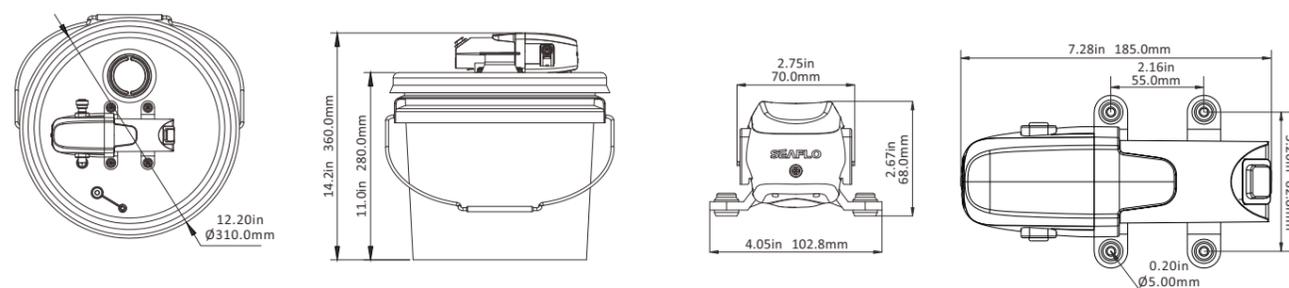

Standard Pump Configurations

Model Number	Voltage	Amp Draw	Fuse Size	Open Flow	Battery Leads	Suction Tube	Weight
SFOCS1-015-01	12V DC	2A	5A	1.5GPM/5.6LPM	6.6ft / 2m	8ft / 2.4m	3.7lbs / 1.69kg

Oil Change System 02



FEATURES & BENEFITS

- Self-contained oil change system
- Self-priming up to 5 feet (1.5m), run dry capable pump, thermal overload protection
- Battery clamp leads and on-off switch to make pumping process quick and simple
- 8 feet (2.4m), oil & heat resistant 1/4 inch suction tube
- 6.6 feet (2m) battery leads with alligator clips
- With 3 m of 10/14 mm (inner/outer diameter) transparent PU tube
- Very portable and easy to carry
- Perfect for changing engine oil in Boats, RV's, Lawn and Garden Equipment
- Easy to operate - four easy steps to fast, clean oil
- Perfect for changing engine oil in Boats, RV's, Lawn and Garden Equipment.



Optional Accessories

INSTALLATION DIMENSION DRAWING

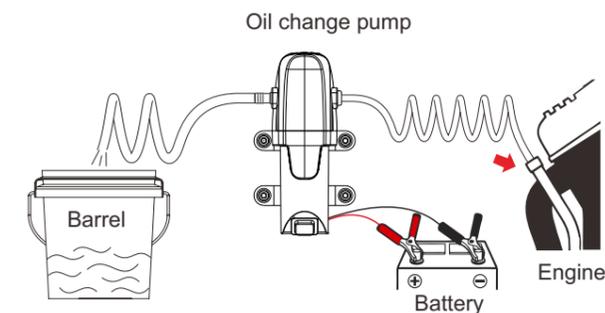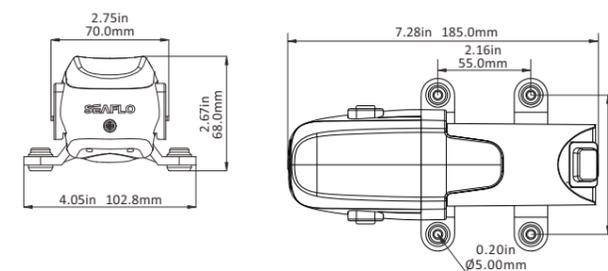

Standard Pump Configurations

Model Number	Voltage	Amp Draw	Fuse Size	Open Flow	Dimension(L*W*H)
SFOCS1-015-02	12V DC	2A	5A	1.5GPM/5.6LPM	185x103x68 mm

Fuel Transfer Pump

FEATURES & BENEFITS

- Free you from lifting heavy fuel cans
- Fast transfer rate up to 3.5GPM
- The flow rate can be controlled by manual control nozzle
- 3-stage design allow to easily replace when damage
- Overload protection to prevent from safety hazard
- Portable and light weight for easy store and convenient use
- Work perfectly with SEAFLO fuel cans
- Transfers Gasoline, Diesel, Antifreeze, Light Oil, Chemical insecticides, Detergent, etc



Simple Switch
Switch on to start pump



Simple Hook
Hook nozzle when not use



Color Box

Standard Tank Configurations

Model	Battery	Voltage	Max Flow Rate	Max Head	Duration	Tubing length	N.W / G.W
SFFTP5-025-01	2pcs of D battery (N/A)	3V	2.5GPM	1.5m	1 H	in: 506 mm out: 1050 mm	387 / 610 g
SFFTP5-032-01	Rechargeable lithium battery	3.7V	3.2GPM	3.0m	2 H	in: 506 mm out: 1050 mm	513 / 760 g
SFFTP1-032-01	No, with power cable	12V	3.2GPM	3.0m	Continuous	in: 506 mm out: 1050 mm	393 / 710 g

Battery Powered Fuel Transfer Pump

FEATURES & BENEFITS

- LED is on when pump turns on, and off when pump turns off
- Explosion-proof motor and overload protection
- Weather-resistant and corrosion-resistant hose
- Auto-stop sensor to stop when full
- Simply press to start and stop



With level sensing
function, automatic stop
when filling up



Reminder of the operating
status of the oil pump with
indicator light



Color Box

FTP21
48.4 mm

FTP22
59.5 mm

FTP23
65.2 mm

Standard Pump Configurations

Model	Battery	Max Flow Rate	Max Head	Tubing length
SFFTP5-024-02	AAAA (N/A)	2.4GPM	1.2m	in: 465 mm out: 1000 mm
SFFTP5-032-02	Lithium	3.2GPM	1.5m	in: 465 mm out: 1000 mm



Portable Marine Boat Fuel Tank With Gauge

DESCRIPTION

SEAFLO 3 Gallon/12 Liter, 6 Gallon/24 Liter Portable Marine Boat Fuel Tank with Gauge is constructed of 2 layers HDPE, which is strong & durable. Designed with ergonomic handle structure and built-in mechanical pointer make it easier use. It complies with 2010 EPA regulations and meets EPA CFR 40, California CCR 2468 and AS/NZS 2906:2001 standards.

TYPICAL APPLICATIONS

SEAFLO Portable Fuel Tank is designed for use in all marine and non-marine small engine applications

FEATURES & BENEFITS

- Automatic vacuum valve ensures proper fuel flow and eliminates the need for manual vent
- Low permeation tank virtually eliminates fuel evaporation and fuel loss.
- 1/4" NPT thread to fit standard tank fittings
- Ethanol and Alcohol compatible



Multifunctional fuel cap with lock protection and built in check valve to ensure the pressure balance for inside and outside of tank during use.



Universal nozzle structure to match most of connectors.



Built-in mechanical pointer to know the level of the liquid in the tank through the transparent observation structure.



Design for easily fixing the tank with strap. Allow stacked pack with multiple layers and prevents tank from moving.

3 Gallon



Model: SFGT-12-01
Capacity: 3 Gallon/12 Liter
Size: 430x290x185.5mm
Weight (DRY): 1.40KG
Fuel: Gasoline
Color: Red

6 Gallon



Model: SFGT-24-01
Capacity: 6 Gallon/24 Liter
Size: 500x340x241mm
Weight (DRY): 2.35KG
Fuel: Gasoline
Color: Red

All Star Series - Auto Shut Off Fuel Cans / 5L, 10L, 20L

DESCRIPTION

It is the latest version (the third generation) of SEAFLO all-star jerry can. With more user-friendly designs, SEAFLO all-star jerry can is more convenient and safer to use. It can hold gasoline, diesel, engine oil, alcohol, clean fuels, etc. The products are widely used in outdoor fuel equipment, such as automobiles, RVs, yachts, garden tools, agricultural equipment, ATVs; it also can be used in pharmaceutical factories, gas stations, energy factories, etc.

FEATURES & BENEFITS

- ① Auto shut off nozzle is easy to operate and will be closed automatically to prevent from leakage
- ② Child proof lock for safer use
- ③ Unique liquid level line for checking the volume at a glance
- ④ Innovative U-shaped groove design, Body of can has better ability of shock resistance, which make it solid and durable
- ⑤ Venting hole ensures faster and safer filling
- ⑥ Humanized side handle for easier use
- ⑦ The fixation problems during transportation is solved easily when U-shaped groove and band fit together.
- ⑧ Widened bottom to prevent from falling; for easy and safe storage, transportation
- ⑨ Slot design for easy stacking
- ⑩ Meet Australian standard of AS/NZS 2906:2001
- ⑪ Meet requirements of EPA & CARB certification



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color
SFGT-05-02	5 L	265*138*242 mm	0.8 kg	Gasoline	Red
SFGT-10-02	10 L	290*184*325 mm	1.3 kg		
SFGT-20-02	20 L	345*224*395 mm	1.8kg		



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color
SFDT-05-02	5 L	265*138*242 mm	0.8 kg	Diesel	Yellow
SFDT-10-02	10 L	290*184*325 mm	1.3 kg		
SFDT-20-02	20 L	345*224*395 mm	1.8kg		



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color
SF2T-05-02	5 L	265*138*242 mm	0.8 kg	Two-stroke	Green
SF2T-10-02	10 L	290*184*325 mm	1.3 kg		
SF2T-20-02	20 L	345*224*395 mm	1.8kg		

Consult factory for other available models

Plastic 5L, 10L, 20L Auto Shut Off Fuel Cans

Fuel Container Gasoline, Diesel, Two-stroke engine oil EAP & AS/NZS 2906:2001 Standards

DESCRIPTION

Seaflor 5, 10 & 20 Litre automatic shut off fuel cans which are designed with specially proportioned rear handle for balanced pouring that is self venting for safer & easier pouring. Features reduced emissions to protect the environment and meets EAP & AS/NZS 2906:2001 Standards.

TYPICAL APPLICATIONS

Car, lawnmower, atv or snowblower and other essential equipment topped off with fuel

FEATURES & BENEFITS

Complies to EPA & CARB Standards
Spill Proof, Durable Vented Pouring Spout
UV Stabilized High Grade Polyethylene
Certified to Australian Standard AS/NZS 2906:2001



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color	Handle Type
SFGT-05-01	5 L	260*130*275 mm	0.8 kg	Gasoline	Red	Built-in
SFGT-10-01	10 L	290*160*346 mm	1.3 kg			
SFGT-20-01	20 L	330*190*476 mm	1.8kg			



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color	Handle Type
SFDT-05-01	5 L	260*130*275 mm	0.8 kg	Diesel	Yellow	Built-in
SFDT-10-01	10 L	290*160*346 mm	1.3 kg			
SFDT-20-01	20 L	330*190*476 mm	1.8kg			



Model	Capacity	Size(L*W*H)mm	Weight (DRY)	Fuel	Color	Handle Type
SF2T-05-01	5 L	260*130*275 mm	0.8 kg	Two-stroke Gasoline Engine Oil	Green	Built-in
SF2T-10-01	10 L	290*160*346 mm	1.3 kg			
SF2T-20-01	20 L	330*190*476 mm	1.8kg			

Consult factory for other available models

Waterproof Storage Can

NEW



FEATURES & BENEFITS

- Meets the needs of family members of all ages
- Waterproof sealing level up to IPX6 can withstand strong water jets (100Ltr/min)
- Versatile used as a portable single seat stool
- Rectangular barrel design large area of side wall increased buoyancy
- Optional carrying bag available for an additional fee



Multiple specifications
Meet family needs



Good sealing
Clean and safe





Rectangular chairs
Easy to carry, seat



Both side with big handle
Can be the handle when
Float on water





5L

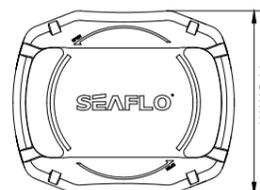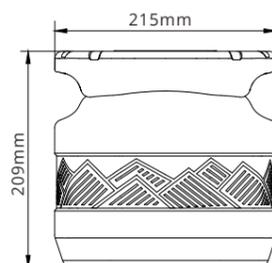

Model	Specification	Size(L*W*H)	Lid material	Barrel body material
WT01-05	5L	215*178*209mm	PP	PE





10L

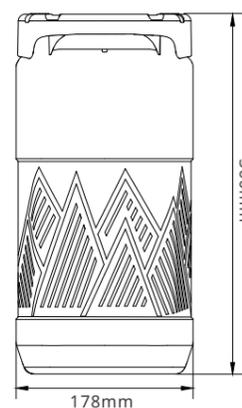

Model	Specification	Size(L*W*H)	Lid material	Barrel body material
WT01-10	10L	215*178*360mm	PP	PE





20L

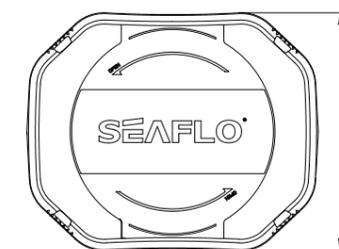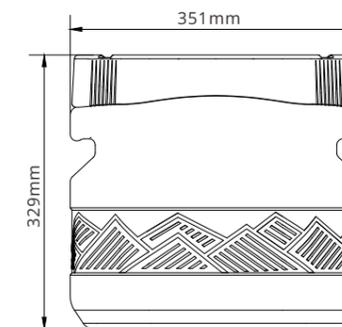

Model	Specification	Size(L*W*H)	Lid material	Barrel body material
WT01-20	20L	285*351*329mm	PP	PE



30L

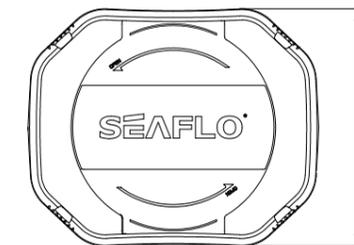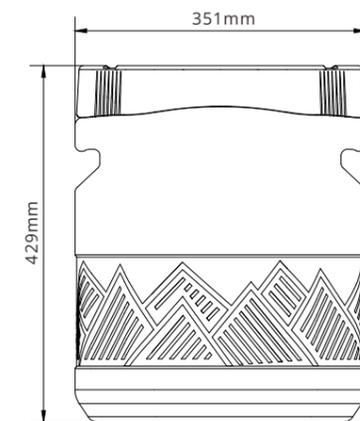

Model	Specification	Size(L*W*H)	Lid material	Barrel body material
WT01-30	30L	285*351*429mm	PP	PE

Optional matching bag (additional fee applies)

FEATURES & BENEFITS

- Made of high-quality fabrics, with a certain waterproof performance
- The interlayer is made of high-quality cold insulation fabric, taking into account the cold effect
- Soft to the touch, good breathability
- High wear resistance, good durability
- High-quality zipper products, smooth and not stuck
- 5L and 20L are equipped with a portable cooler bag that can be carried on one shoulder or cross-body; 10L and 30L are equipped with a cold backpack



Cooler Backpack



portable messenger bag



NEW



Powered Stabilizing Jack

FEATURES & BENEFITS

- Optional electric or manual series
- Electric series includes waterproof switch and reset breaker
- A flip of switch is all it takes to take the sway out of your RV or trailer
- Each leg operates independently, navigating the surface until safely secured in place
- Automatically adjust to uneven, rugged terrain
- Durable Construction allows for stabilizing increased loads and fine leveling
- Strong corrosion resistance, light weight and high strength

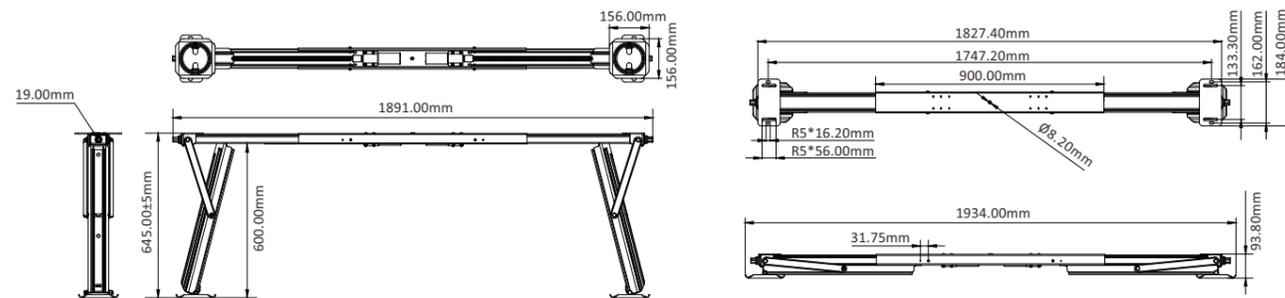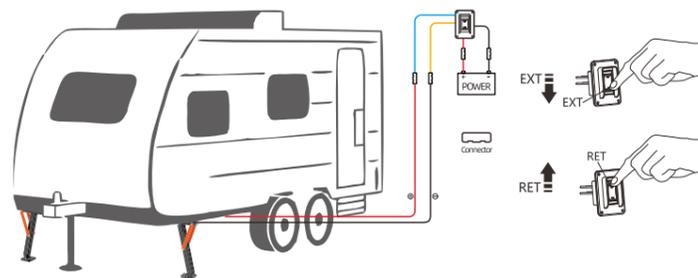

Electrical Powered Stabilizing Jack




Model	Voltage	Current	Frame To Ground Dimension	Static Load Capacity	Packaging includes
SFSJ1-4000-600-01	12 V	15 A	4" to 25"	4000 LBS	2 x Powered Stabilizing Jack 2 x Stab Jack Switch 2 x Reset Breaker
SFSJ2-4000-600-01	24 V	7.5 A	4" to 25"	4000 LBS	2 x Powered Stabilizing Jack 2 x Stab Jack Switch 2 x Reset Breaker

Manual Powered Stabilizing Jack



Model	Frame To Ground Dimension	Static Load Capacity	Packaging includes
SFSJM-4000-600-01	4" to 25"	4000 LBS	2 x Powered Stabilizing Jack 1 x Hex Crank Handles

C-type Stabilizing Jack

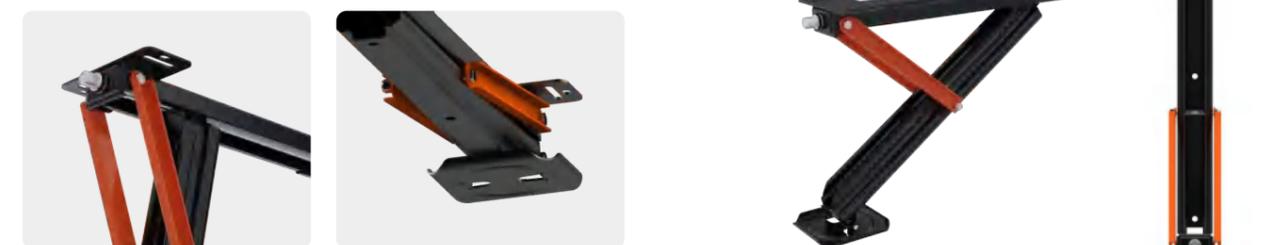

Model	Frame To Ground Dimension	Static Load Capacity	Packaging includes
SFSJS-4000-600-01	4" to 25"	4000 LBS	Single jack



Hex Crank Handles

FEATURES & BENEFITS

- Rust inhibitive zinc coating speed wrench design.
- Forged socket end for long life.
- Spin handle grips for easy operation.



SFSJM-H19-01

Powered Stabilizing Jack Replacement Motor

FEATURES & BENEFITS

- Replacement Stabilizer Jack Components Motor
- The motor waterproof grade reaches Ip66

Product Specifications

Model	Voltage	Current
SFSJ1-Motor-01	12V	15A
SFSJ2-Motor-01	24V	7.5A



Stab Jack Switch

With the flip of a switch, this ultra-fast, ultra-convenient electric stabilizer takes care of all the hassle, sweat, and frustration that comes along with adjusting jacks, giving you optimal stabilization, no matter where you set up camp.

FEATURES & BENEFITS

- Exact replacement for power stabilizer extend/retract switch
- Allows you to lower and raise your RV's electric stabilizer jack
- Includes switch and wiring harness
- Waterproof, IP66-rated assembly
- Simple, rocker style operation

Product Specifications


Model	Voltage	Current
SFSP-030-07	12V/24V DC	30A at 12V or 15A at 24V




Color Box

Raw Water Strainers

Raw water strainers is a filter directly filter water suspended solids, particles and other impurities with a filter net, to reduce dirt, bacteria algae, rust, etc. in a pipe system, in this way to protect the pipe system and equipment and make them work properly.

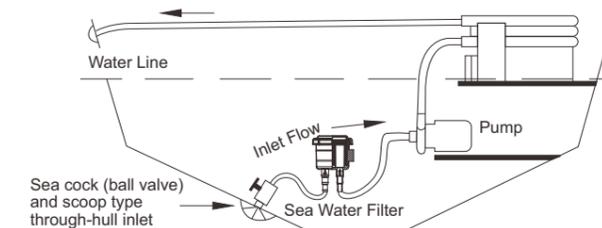

Color Box

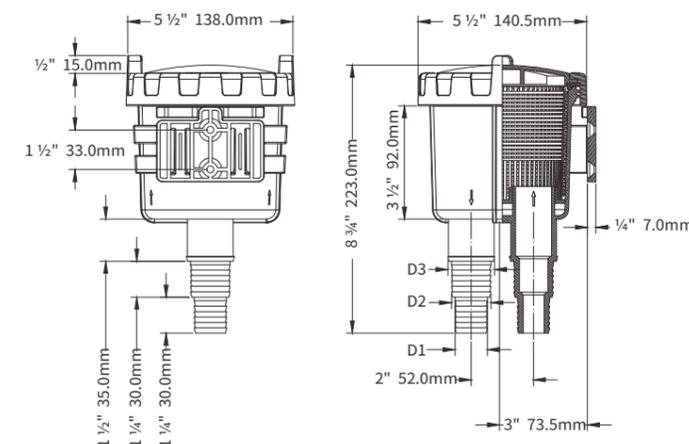


Technical Date

Model	Output Size	Recommended Hose Size	Recommended Input
SF-SWF003	D1: 25.4 mm(1")	25 mm	91 L/min. 24 GPM US
	D2: 31.8 mm(1-1/4")	32 mm	143 L/min. 37.8 GPM US
	D3: 38.1 mm(1-1/2")	38 mm	200 L/min.52.9 GPM US



Color Box

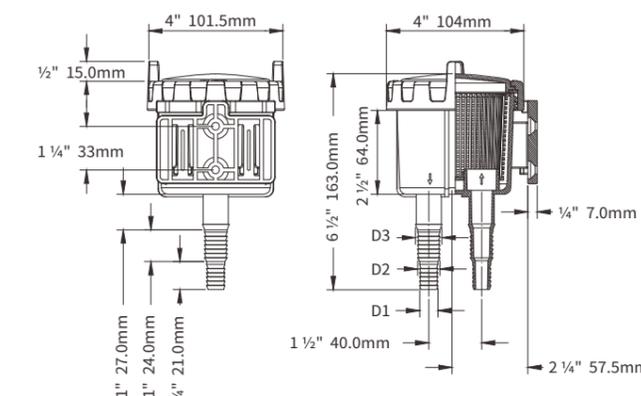


Technical Date

Model	Output Size	Recommended Hose Size	Recommended Input
SF-SWF004	D1: 12.7 mm(1/2")	13 mm	23 L/min. 6 GPM US
	D2: 15.9 mm(5/8")	16 mm	35 L/min. 9 GPM US
	D3: 19.0 mm(3/4")	19 mm	51 L/min. 13 GPM US

Bilge Pump Installation Kit

Used together with SEAFLO bilge pump

APPLICATION

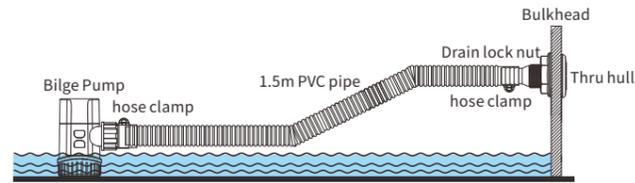

STANDARD PUMP CONFIGURATIONS

Model	Outlet Dia.	Current
SFBPK-0750-01	3/4" (19mm) Outlet	4.5' (1.5m) x 3/4" (19mm) Flexible PVC Hose 3/4" (19mm) Thru-Hull 2 Stainless Steel Hose Clamps
SFBPK-1000-01	1" (25mm) Outlet	4.5' (1.5m) x 1" (25mm) Flexible PVC Hose 1" (25mm) Thru-Hull 2 Stainless Steel Hose Clamps
SFBPK-1125-01	1-1/8" (29mm) Outlet	4.5' (1.5m) x 1-1/8" (29mm) Flexible PVC Hose 1-1/8" (29mm) Thru-Hull 2 Stainless Steel Hose Clamps
SFBPK-1500-01	1-1/2" (40mm) Outlet	4.5' (1.5m) x 1-1/2" (40mm) Flexible PVC Hose 1-1/2" (40mm) Thru-Hull 2 Stainless Steel Hose Clamps
SFBPK-2000-01	2" (52mm) Outlet	4.5' (1.5m) x 2" (52mm) Flexible PVC Hose 2" (52mm) Thru-Hull 2 Stainless Steel Hose Clamps

Hose Clamps

Seaflor hose repair clamp kit is ideal for corrosive applications or applications exposed to moisture or water. Stainless steel surface can prevent hose corrosion. It is very suitable for pipeline maintenance. This clamp provides a durable and low-maintenance solution.

FEATURES & BENEFITS

- Engraved with dimension data for easy reference
- 304 stainless steel for lasting durability
- excellent rust resistance
- Features versatile use with hoses made from a variety of different materials



Model	Size	Material
SFHC-01	5/8 ~ 1" (16~25mm)	304 stainless steel
SFHC-02	3/4 ~ 1-1/8" (19~29mm)	304 stainless steel
SFHC-03	4/5 ~ 1-1/2" (21~38mm)	304 stainless steel
SFHC-04	1 ~ 2" (27~51mm)	304 stainless steel
SFHC-05	1-1/2 ~ 2-1/2" (40~63mm)	304 stainless steel

Pontoon Storage Blocks


SEAFLO Pontoon Storage Blocks are a must have for long-term, winter or fall storage of your pontoon. Their rugged design keeps your pontoon high off the ground and dry to preserve the lifetime of your hull. Each block is capable of holding 4,000 lbs, for a total holding capacity of 16,000 lbs among the 4 blocks.

FEATURES & BENEFITS

- Keeps Your Pontoon Hull High and Dry off of the Ground
- Designed for Ultimate Strength and Contoured to your Pontoon Hull
- Specially Formulated Anti-Ultraviolet, Chemical Resistant and Impact Resistant Composite Material
- Great for Fall and Winter Pontoon Storage
- Stacking Fitment Design for Easy Storage
- 4 Blocks are Included in Each Box



INSTALLATION DIMENSION DRAWING

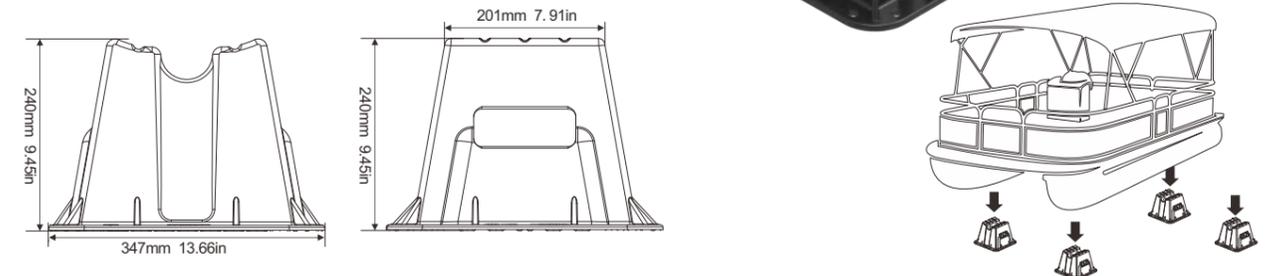

Model	Description	Dimensions
SFPSB-04-01	Pontoon Storage Blocks, set of four	13-1/2" x 13-1/2" x 9-1/2"

Pex Pipe Fittings

- Compatible with PEX or PE-RT pipe
- Lead Free, Corrosion Resistant, Light Weight, High Durability
- Applicable to RV, drinking water, activity room, HVAC system and other fields



SFFE1-1212-01
 Size: 1/2" Barb x 1/2" Barb
 Fitting Type: 1/2" Elbow Tower Fitting
 Material: PA66



SFFT1-1212-01
 Size: 1/2" Barb x 1/2" Barb x 1/2" Barb
 Fitting Type: 1/2" Tee Tower Fitting
 Material: PA66



SFFE1-1220-01
 Size: 1/2"-14MNPT x 1/2" Barb
 Fitting Type: 1/2" X 1/2" MNPT Adapter Elbows
 Material: PA66



SFFT1-1220-01
 Size: 1/2"-14MNPT x 1/2" Barb x 1/2" Barb
 Fitting Type: 1/2" X 1/2" X 1/2" MNPT Tee Fitting
 Material: PA66



SFFS1-1220-01
 Size: 1/2"-14FNPT x 1/2" Barb
 Fitting Type: 1/2" X 1/2" FNPT Swivel Adapter
 Material: PA66



SFFN1-1220-01
 Size: 1/2"-14FNPT x 1/2" Barb
 Fitting Type: 1/2" X 1/2" FNPT Swivel Elbow
 Material: PA66

Boat Drain Plugs

FEATURES & BENEFITS

- High-quality brass material, durable, anti-rust, non-fading, corrosion-resistant, sturdy and durable for long-term use
- The neoprene seal creates a high-quality waterproof seal, which is not easily deformed and has a good sealing effect

- A variety of size and style options, widely used
- Simple twist and lock operation, easy to use
- 2 drain plugs per set
- Use in the bottom hatch, lifeboat and so on

01 T-Handle Drain Plug




SFDP-0750-01



SFDP-1000-01



SFDP-1250-01

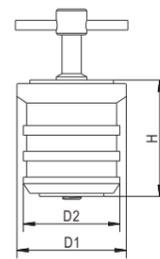

Model	Size	D1mm	D2mm	Hmm	Material	Seal
SFDP-0750-01	3/4"(19mm)	22	17	34	Brass	Neoprene
SFDP-1000-01	1"(25mm)	28	23	34		
SFDP-1250-01	1-1/4"(32mm)	34	30	34		

02 Snap Handle Drain Plug




SFDP-0750-02



SFDP-1000-02



SFDP-1250-02

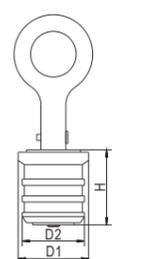

Model	Size	D1mm	D2mm	Hmm	Material	Seal
SFDP-0750-02	3/4"(19mm)	22	17	34	Brass	Neoprene
SFDP-1000-02	1"(25mm)	28	23	34		
SFDP-1250-02	1-1/4"(32mm)	34	30	34		

03 Drain Plugs




SFDP-0750-03



SFDP-1000-03



SFDP-1250-03

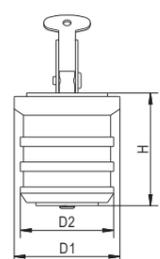

Model	Size	D1mm	D2mm	Hmm	Material	Seal
SFDP-0750-03	3/4"(19mm)	22	17	34	Brass	Neoprene
SFDP-1000-03	1"(25mm)	28	23	34		
SFDP-1250-03	1-1/4"(32mm)	34	30	34		

Fresh Water Pump Strainers



	51S01	52S01	52S02
Size:	1/2"-14 MNPT	3/4" Male Quick Attach	3/4" Male Quick Attach
Fitting Type:	1/2"-14 FNPT Inline Filter / Strainer	1/2" Hose Barb	1/2"-14 FNPT Inline Filter / Strainer
Mesh Size:	50	50	50

Pressure Switches



	01 Series	02 Series	51 New/55/56A Series
Pressure Range	17-100 PSI	17-60 PSI/25 A	60 PSI
Max Amp.	15 A	50	20 A
Suitable For	21/22/33/41 short/42 short/43 short	41 long/42 long/43 long	51 New/55/56A

Wiring Harness



16 AWG wiring harness with on-off switch car adaptor
Length: 95.27"
Molded 2-pin connector: Yes



18 AWG wiring car adaptor
Length: 11.81"
Molded 2-pin connector: Yes



18 AWG wiring 30-amp battery clips
Length: 12.80"
Molded 2-pin connector: Yes



18 AWG wiring harness with on-off switch, two 30-amp battery clips
Length: 98.43"
Molded 2-pin connector: Yes



18 AWG wiring harness with on-off switch
Length: 92.52"
Molded 2-pin connector: Yes

Fresh Water Pump Fittings

 <p>21F001 Size: 15/32" X 3/8" Barb Fitting Type: HB Elbow Fitting w/ O-Ring Material: PA</p>	 <p>23F003 Size: 5/8" QA x 1/4" Barb Fitting Type: HB Straight Fitting w/ O-Ring Material: PA</p>
 <p>21F002 Size: 15/32" X 1/2" Barb Fitting Type: HB Elbow Fitting w/ O-Ring Material: PA</p>	 <p>23F004 Size: 5/8" QA x 3/8" Barb Fitting Type: HB Straight Fitting w/ O-Ring Material: PA</p>
 <p>21F003 Size: 1/4" x 1/4" QA Fitting Type: TUBE Elbow Fitting w/ O-Ring Material: POM</p>	 <p>23F005 Size: 5/8" QA x 1/2" MNPT Fitting Type: MNPT Elbow w/ O-Ring Material: Black Nylon</p>
 <p>21F004 Size: 15/32" X 3/8" Barb Fitting Type: HB Elbow Fitting w/ O-Ring Material: PA</p>	 <p>23F006 Size: 5/8" QA x 1/2" MNPT Fitting Type: MNPT Elbow w/ O-Ring Material: Black Nylon</p>
 <p>21F005 Size: 15/32" X 1/4" Barb Fitting Type: HB Elbow Fitting w/ O-Ring Material: PA</p>	 <p>41F001 Size: 3/4" QA x 1/2" Barb Fitting Type: HS Elbow Fitting w/ O-Ring Material: Black Nylon</p>
 <p>23F001 Size: 5/8" QA x 3/8" Barb Fitting Type: HB Straight Fitting w/ O-Ring Material: PA</p>	 <p>41F002 Size: 3/4" QA x 1/2" MNPT Fitting Type: MNPT Elbow w/ O-Ring Material: Black Nylon</p>
 <p>23F002 Size: 5/8" QA x 3/8" Barb Fitting Type: HB Elbow Fitting w/ O-Ring Material: PA</p>	 <p>41F003 Size: 3/4" QA x 1/2" Barb Fitting Type: HS Straight Fitting w/ O-Ring Material: Black Nylon</p>

 <p>41F004 Size: 3/4" QA x 1/2" MNPT Fitting Type: MNPT Straight w/ O-Ring Material: Black Nylon</p>	 <p>51F003 Size: 1/2" -14 FNPT x 1/2" Barb Fitting Type: HSE Barb Elbow Fitting Material: POM & PP</p>
 <p>41F005 Size: 3/4" QA x 1/2" Fitting Type: TUBE Straight w/ O-Ring Material: Black Nylon</p>	 <p>51F004 Size: 1/2"-14 FNPT x 1/2"-14 MNPT Fitting Type: MNPT Elbow Fitting Material: POM & PP</p>
 <p>41F006 Size: 3/4" QA x 3/4" Barb Fitting Type: HS Straight Fitting w/ O-Ring Material: Black Nylon</p>	 <p>51F005 Size: 1/2" -14FNPT x 3/8" Barb Fitting Type: HSE Barb Elbow Fitting Material: POM & PP</p>
 <p>41F007 Size: 3/4" QA x 3/4" Barb Fitting Type: Elbow Fitting w/ O-Ring Material: Black Nylon</p>	 <p>51F008 Size: 1/2" -14FNPT x 3/4" Barb Fitting Type: HSE Barb Straight Fitting Material: POM & PP</p>
 <p>42F001 Size: 1/2" FNPT x G 1/2" Fitting Type: NPT Standard to G Standard Material: Copper</p>	 <p>51F009 Size: 1/2" FNPT x 1/2" FNPT Fitting Type: HSE Barb Straight Fitting Material: POM & PP</p>
 <p>51F001 Size: 1/2" -14 FNPT x 1/2" Barb Fitting Type: HSE Barb Straight Fitting Material: POM & PP</p>	 <p>51F010 Size: 1/2" FNPT x 3/4" MNPT Fitting Type: HSE Barb Straight Fitting Material: POM & PP</p>
 <p>51F002 Size: 1/2" -14 FNPT x 3/8" Barb Fitting Type: HSE Barb Straight Fitting Material: POM & PP</p>	